

SCons API Docs

version 4.0

SCons Project

August 02, 2020

Contents

SCons Project API Documentation	1
SCons package	1
Module contents	1
Subpackages	1
SCons.Node package	1
Submodules	1
SCons.Node.Alias module	1
SCons.Node.FS module	9
SCons.Node.Python module	67
Module contents	75
SCons.Platform package	85
Submodules	85
SCons.Platform.aix module	85
SCons.Platform.cygwin module	85
SCons.Platform.darwin module	85
SCons.Platform.hpux module	85
SCons.Platform.irix module	85
SCons.Platform.mingw module	85
SCons.Platform.os2 module	86
SCons.Platform.posix module	86
SCons.Platform.sunos module	86
SCons.Platform.virtualenv module	86
SCons.Platform.win32 module	87
Module contents	87
SCons.Scanner package	88
Submodules	88
SCons.Scanner.C module	88
SCons.Scanner.D module	92
SCons.Scanner.Dir module	93
SCons.Scanner.Fortran module	93
SCons.Scanner.IDL module	94
SCons.Scanner.LaTeX module	94
SCons.Scanner.Prog module	95
SCons.Scanner.RC module	95
SCons.Scanner.SWIG module	96
Module contents	96
SCons.Script package	98
Submodules	98
SCons.Script.Interactive module	98
SCons.Script.Main module	100

SCons.Script.SConsOptions module	108
SCons.Script.SConscript module	114
Module contents	121
SCons.Tool package	122
Module contents	122
SCons.Variables package	127
Submodules	127
SCons.Variables.BoolVariable module	127
SCons.Variables.EnumVariable module	127
SCons.Variables.ListVariable module	128
SCons.Variables.PackageVariable module	128
SCons.Variables.PathVariable module	129
Module contents	130
SCons.compat package	131
Module contents	131
Submodules	131
SCons.Action module	131
SCons.Builder module	138
SCons.CacheDir module	144
SCons.Conftest module	145
SCons.Debug module	147
SCons.Defaults module	148
SCons.Environment module	149
SCons.Errors module	163
SCons.Executor module	165
SCons.Job module	170
SCons.Memoize module	173
SCons.PathList module	175
SCons.SConf module	175
SCons.SConsign module	181
SCons.Subst module	183
SCons.Taskmaster module	189
Generic Taskmaster module for the SCons build engine.	189
Taskmaster	189
Task	189
SCons.Util module	196
SCons.Warnings module	204
SCons.cpp module	209
SCons.dblite module	212
SCons.exitfuncs module	216
SCons.compat package	216
Module contents	216

SCons.Node package	217
Submodules	217
SCons.Node.Alias module	217
SCons.Node.FS module	225
SCons.Node.Python module	283
Module contents	291
SCons.Platform package	300
Submodules	300
SCons.Platform.aix module	300
SCons.Platform.cygwin module	300
SCons.Platform.darwin module	301
SCons.Platform.hpux module	301
SCons.Platform.irix module	301
SCons.Platform.mingw module	301
SCons.Platform.os2 module	301
SCons.Platform.posix module	301
SCons.Platform.sunos module	302
SCons.Platform.virtualenv module	302
SCons.Platform.win32 module	302
Module contents	303
SCons.Scanner package	304
Submodules	304
SCons.Scanner.C module	304
SCons.Scanner.D module	308
SCons.Scanner.Dir module	308
SCons.Scanner.Fortran module	309
SCons.Scanner.IDL module	309
SCons.Scanner.LaTeX module	309
SCons.Scanner.Prog module	311
SCons.Scanner.RC module	311
SCons.Scanner.SWIG module	311
Module contents	311
SCons.Script package	314
Submodules	314
SCons.Script.Interactive module	314
SCons.Script.Main module	316
SCons.Script.SConsOptions module	324
SCons.Script.SConsript module	330
Module contents	337
SCons.Tool package	338
Module contents	338
SCons.Variables package	343

Submodules	343
SCons.Variables.BoolVariable module	343
SCons.Variables.EnumVariable module	343
SCons.Variables.ListVariable module	344
SCons.Variables.PackageVariable module	344
SCons.Variables.PathVariable module	345
Module contents	345
Indices and Tables	346
Index	349
Python Module Index	405

SCons Project API Documentation

This is the internal API Documentation for SCons. The Documentation is generated using the Sphinx tool. The target audience is developers working on SCons itself, so it does not clearly delineate what is “Public API” - interfaces for use in your SCons configuration scripts which have a consistency guarantee, and what is internal, so always keep the SCons manual page around for helping with such determinations.

SCons package

Module contents

Subpackages

SCons.Node package

Submodules

SCons.Node.Alias module

scons.Node.Alias

Alias nodes.

This creates a hash of global Aliases (dummy targets).

`class SCons.Node.Alias.Alias (name)`

Bases: `SCons.Node.Node`

`class Attrs`

Bases: `object`

`shared`

`BuildInfo`

alias of `AliasBuildInfo`

`Decider (function)`

`GetTag (key)`

Return a user-defined tag.

`NodeInfo`

alias of `AliasNodeInfo`

`Tag (key, value)`

Add a user-defined tag.

`_add_child (collection, set, child)`

Adds ‘child’ to ‘collection’, first checking ‘set’ to see if it’s already present.

`_children_get ()`

`_children_reset ()`

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_target_from_source`

`_get_scanner` (`env`, `initial_scanner`, `root_node_scanner`, `kw`)

`_memo`

`_specific_sources`

`_tags`

`add_dependency` (`depend`)

Adds dependencies.

`add_ignore` (`depend`)

Adds dependencies to ignore.

`add_prerequisite` (`prerequisite`)

Adds prerequisites

`add_source` (`source`)

Adds sources.

`add_to_implicit` (`deps`)

`add_to_waiting_parents` (`node`)

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

`add_to_waiting_s_e` (`node`)

`add_wkid` (`wkid`)

Add a node to the list of kids waiting to be evaluated

`all_children` (`scan=1`)

Return a list of all the node's direct children.

`alter_targets` ()

Return a list of alternate targets for this Node.

`always_build`

`attributes`

`binfo`

`build` ()

A "builder" for aliases.

`builder`

`builder_set` (`builder`)

`built` ()

Called just after this node is successfully built.

`cached`

changed (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build**children (scan=1)**

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()**convert ()****del_binfo ()**

Delete the build info from this node.

depends**depends_set****disambiguate (must_exist=None)****env****env_set (env, safe=0)****executor****executor_cleanup ()**

Let the executor clean up any cached information.

exists ()

Does this node exist?

explain ()**for_signature ()**

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the __str__() method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of str() to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

get_abspath ()

Return an absolute path to the Node. This will return simply `str(Node)` by default, but for Node types that have a concept of relative path, this might return something different.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected
 cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()**get_contents ()**

The contents of an alias is the concatenation of the content signatures of all its sources.

get_csig ()

Generate a node's content signature, the digested signature of its content.

node - the node
 cache - alternate node to use for the signature cache returns - the content signature

get_env ()**get_env_scanner (env, kw={})****get_executor (create=1)**

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_ninfo ()**get_source_scanner (node)**

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies `self.has_builder()` is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()**get_stored_implicit ()**

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., `CommandGeneratorActions` or Environment variables that are callable), which are called with a `for_signature` argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to `str(Node)` when converting a `Node` to a string, passing in the `for_signature` parameter, such that we will call `Node.for_signature()` or `str(Node)` properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this `Node`, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some `Nodes` would like to implement a `__getattr__()` method, but putting that in the `Node` type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()**get_target_scanner ()****has_builder ()**

Return whether this `Node` has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if `node.builder: ...`”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this `Node` has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore**ignore_set****implicit****implicit_set****includes****is_derived ()**

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit**is_literal ()**

Always pass the string representation of a `Node` to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)**is_up_to_date ()**

Alternate check for whether the `Node` is current: If all of our children were up-to-date, then this `Node` was up-to-date, too.

The `SCons.Node.Alias` and `SCons.Node.Python.Value` subclasses rebind their `current()` method to this method.

`linked`

`make_ready ()`

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

`missing ()`

`multiple_side_effect_has_builder ()`

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

`new_binfo ()`

`new_ninfo ()`

`ninfo`

`nocache`

`noclean`

`postprocess ()`

Clean up anything we don't need to hang onto after we've been built.

`precious`

`prepare ()`

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

`prerequisites`

`pseudo`

`push_to_cache ()`

Try to push a node into a cache

`really_build (**kw)`

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the `prepare()` method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

`ref_count`

`release_target_info ()`

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: `built()` and `File.release_target_info()`

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

Returns true if the node was successfully retrieved.

reexists ()

Does this node exist locally or in a repository?

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

sconsign ()

An Alias is not recorded in `.sconsign` files

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, `Node.FS.Dir`) that *must* use their own `Scanner` and don't select one the `Scanner.Selector` that's configured for the target.

set_always_build (always_build=1)

Set the Node's `always_build` value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_nocache (nocache=1)

Set the Node's `nocache` value.

set_noclean (noclean=1)

Set the Node's `noclean` value.

set_precious (precious=1)

Set the Node's `precious` value.

set_pseudo (pseudo=True)

Set the Node's `precious` value.

set_specific_source (source)

set_state (state)

`side_effect``side_effects``sources``sources_set``state``store_info``str_for_display()``target_peers``visited()`

Called just after this node has been visited (with or without a build).

`waiting_parents``waiting_s_e``wkids`

```
class SCons.Node.Alias.AliasBuildInfo
```

```
  Bases: SCons.Node.BuildInfoBase
```

`bact``bactsig``bdepends``bdependsigs``bimplicit``bimplicitSIGs``bsources``bsourcesigs``current_version_id = 2``merge(other)`

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

```
class SCons.Node.Alias.AliasNameSpace (**kwargs)
```

```
  Bases: collections.UserDict
```

`Alias(name, **kw)``__MutableMapping__marker = <object object>``__abc_impl = <_abc_data object>``clear()` → None. Remove all items from D.

copy ()

classmethod fromkeys (iterable, value=None)

get (k[, d]) → D[k] if k in D, else d. d defaults to None.

items () → a set-like object providing a view on D's items

keys () → a set-like object providing a view on D's keys

lookup (name, **kw)

pop (k[, d]) → v, remove specified key and return the corresponding value.
If key is not found, d is returned if given, otherwise KeyError is raised.

popitem () → (k, v), remove and return some (key, value) pair
as a 2-tuple; but raise KeyError if D is empty.

setdefault (k[, d]) → D.get(k,d), also set D[k]=d if k not in D

update ([, E], **F) → None. Update D from mapping/iterable E and F.
If E present and has a .keys() method, does: for k in E: D[k] = E[k] If E present and lacks .keys() method, does:
for (k, v) in E: D[k] = v In either case, this is followed by: for k, v in F.items(): D[k] = v

values () → an object providing a view on D's values

class SCons.Node.Alias.AliasNodeInfo

Bases: **SCons.Node.NodeInfoBase**

convert (node, val)

csig

current_version_id = 2

field_list = ['csig']

format (field_list=None, names=0)

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a '__dict__' slot is added, it should be updated instead of replaced.

str_to_node (s)

update (node)

SCons.Node.FS module

scons.Node.FS

File system nodes.

These Nodes represent the canonical external objects that people think of when they think of building software: files and directories.

This holds a "default_fs" variable that should be initialized with an FS that can be used by scripts or modules looking for the canonical default.

class SCons.Node.FS.Base (name, directory, fs)

Bases: **SCons.Node.Node**

A generic class for file system entries. This class is for when we don't know yet whether the entry being looked up is a file or a directory. Instances of this class can morph into either Dir or File objects by a later, more precise lookup.

Note: this class does not define `__cmp__` and `__hash__` for efficiency reasons. SCons does a lot of comparing of `Node.FS.{Base,Entry,File,Dir}` objects, so those operations must be as fast as possible, which means we want to use Python's built-in object identity comparisons.

`class Attrs`

Bases: `object`

`shared`

`BuildInfo`

alias of `SCons.Node.BuildInfoBase`

`Decider` (function)

`GetTag` (key)

Return a user-defined tag.

`NodeInfo`

alias of `SCons.Node.NodeInfoBase`

`RDirs` (pathlist)

Search for a list of directories in the Repository list.

`Rfindalldirs` (pathlist)

Return all of the directories for a given path list, including corresponding "backing" directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

`Tag` (key, value)

Add a user-defined tag.

`_Rfindalldirs_key` (pathlist)

`_abspath`

`_add_child` (collection, set, child)

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

`_children_get` ()

`_children_reset` ()

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_sconsign`

`_func_target_from_source`

`_get_scanner` (env, initial_scanner, root_node_scanner, kw)

`_get_str` ()

`_globl (pattern, ondisk=True, source=False, strings=False)`

`_labspath`

`_local`

`_memo`

`_path`

`_path_elements`

`_proxy`

`_save_str ()`

`_specific_sources`

`_tags`

`_tpath`

`add_dependency (depend)`

Adds dependencies.

`add_ignore (depend)`

Adds dependencies to ignore.

`add_prerequisite (prerequisite)`

Adds prerequisites

`add_source (source)`

Adds sources.

`add_to_implicit (deps)`

`add_to_waiting_parents (node)`

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

`add_to_waiting_s_e (node)`

`add_wkid (wkid)`

Add a node to the list of kids waiting to be evaluated

`all_children (scan=1)`

Return a list of all the node's direct children.

`alter_targets ()`

Return a list of alternate targets for this Node.

`always_build`

`attributes`

`binfo`

`build (kw)`**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the `prepare()` method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

builder

builder_set (*builder*)

built ()

Called just after this node is successfully built.

cached

changed (*node=None, allowcache=False*)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an `#included .h` file) is updated.

The `allowcache` option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this `changed` method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to `changed()`.

@see: `FS.File.changed()`, `FS.File.release_target_info()`

changed_since_last_build

children (*scan=1*)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The `SCons.Node.Alias` and `SCons.Node.Python.Value` subclasses rebind their `current()` method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

cwd

del_binfo ()

Delete the build info from this node.

depends

depends_set

dir

disambiguate (*must_exist=None*)

duplicate

env

env_set (*env, safe=0*)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs

Reference to parent Node.FS object

get_abspath ()

Get the absolute path of the file.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()

get_contents ()

Fetch the contents of the entry.

get_csig ()

get_dir ()

get_env ()

get_env_scanner (env, kw={})

get_executor (create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()

get_labspath ()

Get the absolute path of the file.

get_ninfo ()

get_path (dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()

get_stored_implicit ()

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()

get_target_scanner ()

get_tpath ()

getmtime ()

getsize ()

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if node.builder: ..."). When the builder attribute is examined directly, it ends up calling __getattr__ for both the

`__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

`has_explicit_builder ()`

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

`ignore`

`ignore_set`

`implicit`

`implicit_set`

`includes`

`is_derived ()`

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

`is_explicit`

`is_literal ()`

Always pass the string representation of a Node to the command interpreter literally.

`is_sconscript ()`

Returns true if this node is an sconscript

`is_under (dir)`

`is_up_to_date ()`

Default check for whether the Node is current: unknown Node subtypes are always out of date, so they will always get built.

`isdir ()`

`isfile ()`

`islink ()`

`linked`

`lstat ()`

`make_ready ()`

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

`missing ()`

`multiple_side_effect_has_builder ()`

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if `node.builder: ...`”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name**new_binfo ()****new_ninfo ()****ninfo****nocache****noclean****postprocess ()**

Clean up anything we don't need to hang onto after we've been built.

precious**prepare ()**

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites**pseudo****push_to_cache ()**

Try to push a node into a cache

ref_count**release_target_info ()**

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()**reset_executor ()**

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

Returns true if the node was successfully retrieved.

`rexists ()`

Does this node exist locally or in a repository?

`rfile ()`

`rstr ()`

A `Node.FS.Base` object's string representation is its path name.

`sbuilder`

`scan ()`

Scan this node's dependents for implicit dependencies.

`scanner_key ()`

`select_scanner (scanner)`

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, `Node.FS.Dir`) that *must* use their own `Scanner` and don't select one the `Scanner.Selector` that's configured for the target.

`set_always_build (always_build=1)`

Set the Node's `always_build` value.

`set_executor (executor)`

Set the action executor for this node.

`set_explicit (is_explicit)`

`set_local ()`

`set_nocache (nocache=1)`

Set the Node's `nocache` value.

`set_noclean (noclean=1)`

Set the Node's `noclean` value.

`set_precious (precious=1)`

Set the Node's `precious` value.

`set_pseudo (pseudo=True)`

Set the Node's `precious` value.

`set_specific_source (source)`

`set_src_builder (builder)`

Set the source code builder for this node.

`set_state (state)`

`side_effect`

`side_effects`

`sources`

`sources_set`

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcnode ()

If this node is in a build path, return the node corresponding to its source file. Otherwise, return ourself.

stat ()**state****store_info****str_for_display ()****target_from_source (prefix, suffix, splitext=<function splitext>)**

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix.

Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers**visited ()**

Called just after this node has been visited (with or without a build).

waiting_parents**waiting_s_e****wkids**

class SCons.Node.FS.Dir (name, directory, fs)

Bases: SCons.Node.FS.Base

A class for directories in a file system.

class Attrs

Bases: object

shared

BuildInfo

alias of DirBuildInfo

Decider (function)

Dir (name, create=True)

Looks up or creates a directory node named 'name' relative to this directory.

Entry (name)

Looks up or creates an entry node named 'name' relative to this directory.

File (name)

Looks up or creates a file node named 'name' relative to this directory.

GetTag (key)

Return a user-defined tag.

NodeInfo

alias of DirNodeInfo

RDirs (pathlist)

Search for a list of directories in the Repository list.

Rfindalldirs (pathlist)

Return all of the directories for a given path list, including corresponding “backing” directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

Tag (key, value)

Add a user-defined tag.

_Dir__clearRepositoryCache (duplicate=None)

Called when we change the repository(ies) for a directory. This clears any cached information that is invalidated by changing the repository.

_Dir__resetDuplicate (node)**_Rfindalldirs_key (pathlist)****_abspath****_add_child (collection, set, child)**

Adds ‘child’ to ‘collection’, first checking ‘set’ to see if it’s already present.

_children_get ()**_children_reset ()****_create ()**

Create this directory, silently and without worrying about whether the builder is the default or not.

_func_exists**_func_get_contents****_func_is_derived****_func_rexists****_func_sconsign****_func_target_from_source****_get_scanner (env, initial_scanner, root_node_scanner, kw)****_get_str ()****_glob1 (pattern, ondisk=True, source=False, strings=False)**

Globs for and returns a list of entry names matching a single pattern in this directory.

This searches any repositories and source directories for corresponding entries and returns a Node (or string) relative to the current directory if an entry is found anywhere.

TODO: handle pattern with no wildcard

_labspath**_local****_memo****_morph ()**

Turn a file system Node (either a freshly initialized directory object or a separate Entry object) into a proper directory object.

Set up this directory's entries and hook it into the file system tree. Specify that directories (this Node) don't use signatures for calculating whether they're current.

`_path`

`_path_elements`

`_proxy`

`_rel_path_key (other)`

`_save_str ()`

`_sconsign`

`_specific_sources`

`_srcdir_find_file_key (filename)`

`_tags`

`_tpath`

`addRepository (dir)`

`add_dependency (depend)`

Adds dependencies.

`add_ignore (depend)`

Adds dependencies to ignore.

`add_prerequisite (prerequisite)`

Adds prerequisites

`add_source (source)`

Adds sources.

`add_to_implicit (deps)`

`add_to_waiting_parents (node)`

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

`add_to_waiting_s_e (node)`

`add_wkid (wkid)`

Add a node to the list of kids waiting to be evaluated

`all_children (scan=1)`

Return a list of all the node's direct children.

`alter_targets ()`

Return any corresponding targets in a variant directory.

`always_build`

`attributes`

binfo**build (**kw)**

A null “builder” for directories.

builder**builder_set (builder)****built ()**

Called just after this node is successfully built.

cached**cachedir_csig****cachesig****changed (node=None, allowcache=False)**

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn’t needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build**children (scan=1)**

Return a list of the node’s direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()**contentsig****cwd****del_binfo ()**

Delete the build info from this node.

depends**depends_set****dir****dir_on_disk (name)**

dirname**disambiguate** (must_exist=None)**diskcheck_match** ()**do_duplicate** (src)**duplicate****entries****entry_abspath** (name)**entry_exists_on_disk** (name)

Searches through the file/dir entries of the current directory, and returns True if a physical entry with the given name could be found.

@see reentry_exists_on_disk

entry_labspath (name)**entry_path** (name)**entry_tpath** (name)**env****env_set** (env, safe=0)**executor****executor_cleanup** ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()**file_on_disk** (name)**for_signature** ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs**getRepositories** ()

Returns a list of repositories for this directory.

get_abspath ()

Get the absolute path of the file.

get_all_rdirs ()**get_binfo** ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()

get_contents ()

Return content signatures and names of all our children separated by new-lines. Ensure that the nodes are sorted.

get_csig ()

Compute the content signature for Directory nodes. In general, this is not needed and the content signature is not stored in the DirNodeInfo. However, if get_contents on a Dir node is called which has a child directory, the child directory should return the hash of its contents.

get_dir ()

get_env ()

get_env_scanner (env, kw={})

get_executor (create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return this directory's implicit dependencies.

We don't bother caching the results because the scan typically shouldn't be requested more than once (as opposed to scanning .h file contents, which can be requested as many times as the files is #included by other files).

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()

get_labspath ()

Get the absolute path of the file.

get_ninfo ()

get_path (dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()

get_stored_implicit ()

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., `CommandGeneratorActions` or Environment variables that are callable), which are called with a `for_signature` argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to `str(Node)` when converting a `Node` to a string, passing in the `for_signature` parameter, such that we will call `Node.for_signature()` or `str(Node)` properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this `Node`, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some `Nodes` would like to implement a `__getattr__()` method, but putting that in the `Node` type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()

get_target_scanner ()

get_text_contents ()

We already emit things in text, so just return the binary version.

get_timestamp ()

Return the latest timestamp from among our children

get_tpath ()

getmtime ()

getsize ()

glob (pathname, ondisk=True, source=False, strings=False, exclude=None)

Returns a list of `Nodes` (or strings) matching a specified pathname pattern.

Pathname patterns follow UNIX shell semantics: `*` matches any-length strings of any characters, `?` matches any character, and `[]` can enclose lists or ranges of characters. Matches do not span directory separators.

The matches take into account Repositories, returning local `Nodes` if a corresponding entry exists in a Repository (either an in-memory `Node` or something on disk).

By default, the `glob()` function matches entries that exist on-disk, in addition to in-memory `Nodes`. Setting the “`ondisk`” argument to `False` (or some other non-true value) causes the `glob()` function to only match in-memory `Nodes`. The default behavior is to return both the on-disk and in-memory `Nodes`.

The “`source`” argument, when true, specifies that corresponding source `Nodes` must be returned if you’re globbing in a build directory (initialized with `VariantDir()`). The default behavior is to return `Nodes` local to the `VariantDir()`.

The “`strings`” argument, when true, returns the matches as strings, not `Nodes`. The strings are path names relative to this directory.

The “`exclude`” argument, if not `None`, must be a pattern or a list of patterns following the same UNIX shell semantics. Elements matching a least one pattern of this list will be excluded from the result.

The underlying algorithm is adapted from the `glob.glob()` function in the Python library (but heavily modified), and uses `fnmatch()` under the covers.

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

`has_explicit_builder ()`

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

`ignore`

`ignore_set`

`implicit`

`implicit_set`

`includes`

`is_derived ()`

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

`is_explicit`

`is_literal ()`

Always pass the string representation of a Node to the command interpreter literally.

`is_sconscript ()`

Returns true if this node is an sconscript

`is_under (dir)`

`is_up_to_date ()`

If any child is not up-to-date, then this directory isn't, either.

`isdir ()`

`isfile ()`

`islink ()`

`link (srcdir, duplicate)`

Set this directory as the variant directory for the supplied source directory.

`linked`

`lstat ()`

`make_ready ()`

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

`missing ()`

`multiple_side_effect_has_builder ()`

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

on_disk_entries

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

rdir ()

ref_count

rel_path (other)

Return a path to “other” relative to this directory.

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: `built()` and `File.release_target_info()`

released_target_info

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

reentry_exists_on_disk (name)

Searches through the file/dir entries of the current *and* all its remote directories (repos), and returns True if a physical entry with the given name could be found. The local directory (self) gets searched first, so repositories take a lower precedence regarding the searching order.

@see entry_exists_on_disk

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

A directory does not get scanned.

scanner_paths

sconsign ()

Return the .sconsign file info for this directory.

searched

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (*is_explicit*)

set_local ()

set_nocache (*nocache=1*)

Set the Node's nocache value.

set_noclean (*noclean=1*)

Set the Node's noclean value.

set_precious (*precious=1*)

Set the Node's precious value.

set_pseudo (*pseudo=True*)

Set the Node's precious value.

set_specific_source (*source*)

set_src_builder (*builder*)

Set the source code builder for this node.

set_state (*state*)

side_effect

side_effects

sources

sources_set

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcdir

srcdir_duplicate (*name*)

srcdir_find_file (*filename*)

srcdir_list ()

srcnode ()

Dir has a special need for srcnode()...if we have a srcdir attribute set, then that *is* our srcnode.

stat ()

state

store_info

str_for_display ()

target_from_source (*prefix, suffix, splitext=<function splitext>*)

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix. Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers**up ()****variant_dirs****visited ()**

Called just after this node has been visited (with or without a build).

waiting_parents**waiting_s_e****walk (func, arg)**

Walk this directory tree by calling the specified function for each directory in the tree.

This behaves like the `os.path.walk()` function, but for in-memory `Node.FS.Dir` objects. The function takes the same arguments as the functions passed to `os.path.walk()`:

`func(arg, dirname, fnames)`

Except that “dirname” will actually be the directory *Node*, not the string. The ‘.’ and ‘..’ entries are excluded from fnames. The fnames list may be modified in-place to filter the subdirectories visited or otherwise impose a specific order. The “arg” argument is always passed to `func()` and may be used in any way (or ignored, passing `None` is common).

wkids

class SCons.Node.FS.DirBuildInfo
Bases: SCons.Node.BuildInfoBase

bact**bactsig****bdepends****bdependsigns****bimplicit****bimplicitsigns****bsources****bsourcesigns****current_version_id = 2****merge (other)**

Merge the fields of another object into this object. Already existing information is overwritten by the other instance’s data. WARNING: If a ‘__dict__’ slot is added, it should be updated instead of replaced.

class SCons.Node.FS.DirNodeInfo
Bases: SCons.Node.NodeInfoBase

convert (node, val)**current_version_id = 2****format (field_list=None, names=0)****fs = None**

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

str_to_node (s)**update** (node)

class `SCons.Node.FS.DiskChecker` (type, do, ignore)

Bases: `object`

set (list)

class `SCons.Node.FS.Entry` (name, directory, fs)

Bases: `SCons.Node.FS.Base`

This is the class for generic Node.FS entries—that is, things that could be a File or a Dir, but we're just not sure yet. Consequently, the methods in this class really exist just to transform their associated object into the right class when the time comes, and then call the same-named method in the transformed class.

class `Attrs`

Bases: `object`

`shared`

`BuildInfo`

alias of `SCons.Node.BuildInfoBase`

`Decider` (function)

`GetTag` (key)

Return a user-defined tag.

`NodeInfo`

alias of `SCons.Node.NodeInfoBase`

`RDirs` (pathlist)

Search for a list of directories in the Repository list.

`Rfindalldirs` (pathlist)

Return all of the directories for a given path list, including corresponding "backing" directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

`Tag` (key, value)

Add a user-defined tag.

`_Rfindalldirs_key` (pathlist)

`_abspath`

`_add_child` (collection, set, child)

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

`_children_get` ()

`_children_reset` ()

`_func_exists`

`_func_get_contents`

```

_func_is_derived
_func_rexists
_func_sconsign
_func_target_from_source
_get_scanner (env, initial_scanner, root_node_scanner, kw)
_get_str ()
_globl (pattern, ondisk=True, source=False, strings=False)
_labspath
_local
_memo
_path
_path_elements
_proxy
_save_str ()
_sconsign
_specific_sources
_tags
_tpath

add_dependency (depend)
    Adds dependencies.

add_ignore (depend)
    Adds dependencies to ignore.

add_prerequisite (prerequisite)
    Adds prerequisites

add_source (source)
    Adds sources.

add_to_implicit (deps)

add_to_waiting_parents (node)
    Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not.
    (Note that the returned values are intended to be used to increment a reference count, so don't think you can
    "clean up" this function by using True and False instead...)

add_to_waiting_s_e (node)

add_wkid (wkid)
    Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

```

Return a list of all the node's direct children.

alter_targets ()

Return a list of alternate targets for this Node.

always_build

attributes

binfo

build (kw)**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the prepare() method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

builder

builder_set (builder)

built ()

Called just after this node is successfully built.

cached

cachedir_csig

cachesig

changed (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build

children (scan=1)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

contentsig

`cwd`

`del_binfo ()`

Delete the build info from this node.

`depends`

`depends_set`

`dir`

`dirname`

`disambiguate (must_exist=None)`

`diskcheck_match ()`

`duplicate`

`entries`

`env`

`env_set (env, safe=0)`

`executor`

`executor_cleanup ()`

Let the executor clean up any cached information.

`exists ()`

Does this node exists?

`explain ()`

`for_signature ()`

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

`fs`

`get_abspath ()`

Get the absolute path of the file.

`get_binfo ()`

Fetch a node's build information.

`node` - the node whose sources will be collected
`cache` - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

`get_build_env ()`

Fetch the appropriate Environment to build this node.

`get_build_scanner_path (scanner)`

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()

get_contents ()

Fetch the contents of the entry. Returns the exact binary contents of the file.

get_csig ()

get_dir ()

get_env ()

get_env_scanner (env, kw={})

get_executor (create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()

get_labspath ()

Get the absolute path of the file.

get_ninfo ()

get_path (dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()

get_stored_implicit ()

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to `str(Node)` when converting a `Node` to a string, passing in the `for_signature` parameter, such that we will call `Node.for_signature()` or `str(Node)` properly, depending on whether we are calculating a signature or actually constructing a command line.

`get_subst_proxy ()`

This method is expected to return an object that will function exactly like this `Node`, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some `Nodes` would like to implement a `__getattr__()` method, but putting that in the `Node` type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

`get_suffix ()`

`get_target_scanner ()`

`get_text_contents ()`

Fetch the decoded text contents of a Unicode encoded `Entry`.

Since this should return the text contents from the file system, we check to see into what sort of subclass we should morph this `Entry`.

`get_tpath ()`

`getmtime ()`

`getsize ()`

`has_builder ()`

Return whether this `Node` has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if `node.builder: ...`”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

`has_explicit_builder ()`

Return whether this `Node` has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

`ignore`

`ignore_set`

`implicit`

`implicit_set`

`includes`

`is_derived ()`

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

`is_explicit`

`is_literal ()`

Always pass the string representation of a `Node` to the command interpreter literally.

`is_sconscript ()`

Returns true if this node is an sconscript

is_under (dir)**is_up_to_date ()**

Default check for whether the Node is current: unknown Node subtypes are always out of date, so they will always get built.

isdir ()**isfile ()****islink ()****linked****lstat ()****make_ready ()**

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()**multiple_side_effect_has_builder ()**

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

Called to make sure a Node is a Dir. Since we’re an Entry, we can morph into one.

name**new_binfo ()****new_ninfo ()****ninfo****nocache****noclean****on_disk_entries****postprocess ()**

Clean up anything we don’t need to hang onto after we’ve been built.

precious**prepare ()**

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

ref_count

rel_path (other)

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

released_target_info

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

We're a generic Entry, but the caller is actually looking for a File at this point, so morph into one.

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

scanner_paths**searched****select_scanner** (*scanner*)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.**set_always_build** (*always_build=1*)

Set the Node's always_build value.

set_executor (*executor*)

Set the action executor for this node.

set_explicit (*is_explicit*)**set_local** ()**set_nocache** (*nocache=1*)

Set the Node's nocache value.

set_noclean (*noclean=1*)

Set the Node's noclean value.

set_precious (*precious=1*)

Set the Node's precious value.

set_pseudo (*pseudo=True*)

Set the Node's precious value.

set_specific_source (*source*)**set_src_builder** (*builder*)

Set the source code builder for this node.

set_state (*state*)**side_effect****side_effects****sources****sources_set****src_builder** ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srkdir**srcnode** ()

If this node is in a build path, return the node corresponding to its source file. Otherwise, return ourself.

stat ()**state****store_info**

`str_for_display ()`

`target_from_source (prefix, suffix, splitext=<function splitext>)`

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix. Note that this method can be overridden dynamically for generated files that need different behavior. See `Tool/swig.py` for an example.

`target_peers`

`variant_dirs`

`visited ()`

Called just after this node has been visited (with or without a build).

`waiting_parents`

`waiting_s_e`

`wkids`

`class SCons.Node.FS.EntryProxy (subject)`

Bases: `SCons.Util.Proxy`

`__EntryProxy__get_abspath ()`

`__EntryProxy__get_base_path ()`

Return the file's directory and file name, with the suffix stripped.

`__EntryProxy__get_dir ()`

`__EntryProxy__get_file ()`

`__EntryProxy__get_filebase ()`

`__EntryProxy__get_posix_path ()`

Return the path with / as the path separator, regardless of platform.

`__EntryProxy__get_rsrcdir ()`

Returns the directory containing the source node linked to this node via `VariantDir()`, or the directory of this node if not linked.

`__EntryProxy__get_rsrcnode ()`

`__EntryProxy__get_srcdir ()`

Returns the directory containing the source node linked to this node via `VariantDir()`, or the directory of this node if not linked.

`__EntryProxy__get_srcnode ()`

`__EntryProxy__get_suffix ()`

`__EntryProxy__get_windows_path ()`

Return the path with as the path separator, regardless of platform.

```
dictSpecialAttrs = {'abspath': <function EntryProxy.__get_abspath>, 'base': <function
EntryProxy.__get_base_path>, 'dir': <function EntryProxy.__get_dir>, 'file': <function EntryProxy.__get_file>,
'filebase': <function EntryProxy.__get_filebase>, 'posix': <function EntryProxy.__get_posix_path>, 'rsrcdir':
<function EntryProxy.__get_rsrcdir>, 'srcpath': <function EntryProxy.__get_rsrcnode>, 'srcdir': <function
EntryProxy.__get_srcdir>, 'srcpath': <function EntryProxy.__get_srcnode>, 'suffix': <function
EntryProxy.__get_suffix>, 'win32': <function EntryProxy.__get_windows_path>, 'windows': <function
EntryProxy.__get_windows_path>}
```

get ()

Retrieve the entire wrapped object

exception `SCons.Node.FS.EntryProxyAttributeError` (`entry_proxy`, `attribute`)

Bases: `AttributeError`

An `AttributeError` subclass for recording and displaying the name of the underlying `Entry` involved in an `AttributeError` exception.

args**with_traceback ()**

`Exception.with_traceback(tb)` – set `self.__traceback__` to `tb` and return `self`.

class `SCons.Node.FS.FS` (`path=None`)

Bases: `SCons.Node.FS.LocalFS`

Dir (`name`, `directory=None`, `create=True`)

Look up or create a `Dir` node with the specified name. If the name is a relative path (begins with `./`, `../`, or a file name), then it is looked up relative to the supplied directory node, or to the top level directory of the FS (supplied at construction time) if no directory is supplied.

This method will raise `TypeError` if a normal file is found at the specified path.

Entry (`name`, `directory=None`, `create=1`)

Look up or create a generic `Entry` node with the specified name. If the name is a relative path (begins with `./`, `../`, or a file name), then it is looked up relative to the supplied directory node, or to the top level directory of the FS (supplied at construction time) if no directory is supplied.

File (`name`, `directory=None`, `create=1`)

Look up or create a `File` node with the specified name. If the name is a relative path (begins with `./`, `../`, or a file name), then it is looked up relative to the supplied directory node, or to the top level directory of the FS (supplied at construction time) if no directory is supplied.

This method will raise `TypeError` if a directory is found at the specified path.

Glob (`pathname`, `ondisk=True`, `source=True`, `strings=False`, `exclude=None`, `cwd=None`)

Globs

This is mainly a shim layer

PyPackageDir (`modulename`)

Locate the directory of a given python module name

For example `scons` might resolve to Windows: `C:\Python27\Lib\site-packages\scons-2.5.1` Linux: `/usr/lib/scons`

This can be useful when we want to determine a toolpath based on a python module name

Repository (`*dirs`)

Specify `Repository` directories to search.

VariantDir (`variant_dir`, `src_dir`, `duplicate=1`)

Link the supplied variant directory to the source directory for purposes of building files.

_lookup (`p`, `directory`, `fsclass`, `create=1`)

The generic entry point for `Node` lookup with user-supplied data.

This translates arbitrary input into a canonical `Node.FS` object of the specified `fsclass`. The general approach for strings is to turn it into a fully normalized absolute path and then call the root directory's `lookup_abs()` method for the heavy lifting.

If the path name begins with `#`, it is unconditionally interpreted relative to the top-level directory of this FS. `#` is treated as a synonym for the top-level `SConstruct` directory, much like `~` is treated as a synonym for the user's home directory in a UNIX shell. So both `#foo` and `~/foo` refer to the `foo` subdirectory underneath the top-level `SConstruct` directory.

If the path name is relative, then the path is looked up relative to the specified directory, or the current directory (`self._cwd`, typically the `SConstruct` directory) if the specified directory is `None`.

chdir (`dir`, `change_os_dir=0`)

Change the current working directory for lookups. If `change_os_dir` is true, we will also change the “real” cwd to match.

`chmod (path, mode)`

`copy (src, dst)`

`copy2 (src, dst)`

`exists (path)`

`get_max_drift ()`

`get_root (drive)`

Returns the root directory for the specified drive, creating it if necessary.

`getcwd ()`

`getmtime (path)`

`getsize (path)`

`isdir (path)`

`isfile (path)`

`islink (path)`

`link (src, dst)`

`listdir (path)`

`lstat (path)`

`makedirs (path)`

`mkdir (path)`

`open (path)`

`readlink (file)`

`rename (old, new)`

`set_SConstruct_dir (dir)`

`set_max_drift (max_drift)`

`stat (path)`

`symlink (src, dst)`

`unlink (path)`

`variant_dir_target_climb (orig, dir, tail)`

Create targets in corresponding variant directories

Climb the directory tree, and look up path names relative to any linked variant directories we find.

Even though this loops and walks up the tree, we don't memoize the return value because this is really only used to process the command-line targets.

`class SCons.Node.FS.File (name, directory, fs)`

Bases: `SCons.Node.FS.Base`

A class for files in a file system.

`class Attrs`

Bases: `object`

`shared`

`BuildInfo`

alias of `FileBuildInfo`

`Decider` (function)

`Dir` (name, create=True)

Create a directory node named 'name' relative to the directory of this file.

`Dirs` (pathlist)

Create a list of directories relative to the SConscript directory of this file.

`Entry` (name)

Create an entry node named 'name' relative to the directory of this file.

`File` (name)

Create a file node named 'name' relative to the directory of this file.

`GetTag` (key)

Return a user-defined tag.

`NodeInfo`

alias of `FileNodeInfo`

`RDirs` (pathlist)

Search for a list of directories in the Repository list.

`Rfindalldirs` (pathlist)

Return all of the directories for a given path list, including corresponding "backing" directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

`Tag` (key, value)

Add a user-defined tag.

`_File__dmap_cache = {}`

`_File__dmap_sig_cache = {}`

`_Rfindalldirs_key` (pathlist)

`_abspath`

`_add_child` (collection, set, child)

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

`_add_strings_to_dependency_map` (dmap)

In the case comparing node objects isn't sufficient, we'll add the strings for the nodes to the dependency map :return:

`_build_dependency_map` (binfo)

Build mapping from file -> signature

Parameters:

- - **self** (*self*) –
- - **buildinfo from node being considered** (*binfo*) –

Returns: dictionary of file->signature mappings

`_children_get ()`

`_children_reset ()`

`_createDir ()`

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_sconsign`

`_func_target_from_source`

`_get_found_includes_key (env, scanner, path)`

`_get_previous_signatures (dmap)`

Return a list of corresponding csigs from previous build in order of the node/files in children.

Parameters:

- - **self** (*self*) –
- - **Dictionary of file -> csig** (*dmap*) –

Returns: List of csigs for provided list of children

`_get_scanner (env, initial_scanner, root_node_scanner, kw)`

`_get_str ()`

`_glob1 (pattern, ondisk=True, source=False, strings=False)`

`_labspath`

`_local`

`_memo`

`_morph ()`

Turn a file system node into a File object.

`_path`

`_path_elements`

`_proxy`

`_rmv_existing ()`

`_save_str ()`

`_sconsign`

_specific_sources

_tags

_tpath

add_dependency (depend)

Adds dependencies.

add_ignore (depend)

Adds dependencies to ignore.

add_prerequisite (prerequisite)

Adds prerequisites

add_source (source)

Adds sources.

add_to_implicit (deps)

add_to_waiting_parents (node)

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

add_to_waiting_s_e (node)

add_wkid (wkid)

Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

Return a list of all the node's direct children.

alter_targets ()

Return any corresponding targets in a variant directory.

always_build

attributes

binfo

build (kw)**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the prepare() method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

builder

builder_set (builder)

built ()

Called just after this File node is successfully built.

Just like for 'release_target_info' we try to release some more target node attributes in order to minimize the overall memory consumption.

@see: release_target_info

cached

`cachedir_csig``cachesig``changed (node=None, allowcache=False)`

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built.

For File nodes this is basically a wrapper around Node.changed(), but we allow the return value to get cached after the reference to the Executor got released in release_target_info().

@see: Node.changed()

`changed_content (target, prev_ni, repo_node=None)``changed_since_last_build``changed_state (target, prev_ni, repo_node=None)``changed_timestamp_match (target, prev_ni, repo_node=None)`

Return True if the timestamps don't match or if there is no previous timestamp :param target: :param prev_ni: Information about the node from the previous build :return:

`changed_timestamp_newer (target, prev_ni, repo_node=None)``changed_timestamp_then_content (target, prev_ni, node=None)`

Used when decider for file is Timestamp-MD5

NOTE: If the timestamp hasn't changed this will skip md5'ing the

file and just copy the prev_ni provided. If the prev_ni is wrong. It will propagate it. See: <https://github.com/SCons/scons/issues/2980>

Parameters:

- - **dependency** (*self*) –
- - **target** (*target*) –
- - **The NodeInfo object loaded from previous builds .sconsign** (*prev_ni*) –
- - **Node instance. Check this node for file existence/timestamp** (*node*) – if specified.

Returns: Boolean - Indicates if node(File) has changed.

`children (scan=1)`

Return a list of the node's direct children, minus those that are ignored by this node.

`children_are_up_to_date ()`

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

`clear ()`

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

`clear_memoized_values ()``contentsig``convert_copy_attrs = ['bsources', 'bimplicit', 'bdepends', 'bact', 'bactsig', 'ninfo']``convert_old_entry (old_entry)``convert_sig_attrs = ['bsourcesigs', 'bimplicitsigs', 'bdependsigs']``cwd`

del_binfo ()

Delete the build info from this node.

depends**depends_set****dir****dirname****disambiguate (must_exist=None)****diskcheck_match ()****do_duplicate (src)****duplicate****entries****env****env_set (env, safe=0)****executor****executor_cleanup ()**

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()**find_repo_file ()**

For this node, find if there exists a corresponding file in one or more repositories :return: list of corresponding files in repositories

find_src_builder ()**for_signature ()**

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs**get_abspath ()**

Get the absolute path of the file.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_bsig ()

Return the signature for a cached file, including its children.

It adds the path of the cached file to the cache signature, because multiple targets built by the same action will all have the same build signature, and we have to differentiate them somehow.

Signature should normally be string of hex digits.

get_cachedir_csig ()

Fetch a Node's content signature for purposes of computing another Node's cachesig.

This is a wrapper around the normal `get_csig()` method that handles the somewhat obscure case of using `CacheDir` with the `-n` option. Any files that don't exist would normally be "built" by fetching them from the cache, but the normal `get_csig()` method will try to open up the local file, which doesn't exist because the `-n` option meant we didn't actually pull the file from `cachedir`. But since the file *does* actually exist in the `cachedir`, we can use its contents for the `csig`.

get_content_hash ()

Compute and return the MD5 hash for this file.

get_contents ()

Fetch the contents of the entry.

get_contents_sig ()

A helper method for `get_cachedir_bsig`.

It computes and returns the signature for this node's contents.

get_csig ()

Generate a node's content signature, the digested signature of its content.

node - the node cache - alternate node to use for the signature cache returns - the content signature

get_dir ()**get_env ()****get_env_scanner (env, kw={})****get_executor (create=1)**

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the included implicit dependencies in this file. Cache results so we only scan the file once per path regardless of how many times this information is requested.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()**get_labspath ()**

Get the absolute path of the file.

get_max_drift_csig ()

Returns the content signature currently stored for this node if it's been unmodified longer than the `max_drift` value, or the `max_drift` value is 0. Returns `None` otherwise.

`get_ninfo ()`

`get_path (dir=None)`

Return path relative to the current working directory of the `Node.FS.Base` object that owns us.

`get_path_elements ()`

`get_size ()`

`get_source_scanner (node)`

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies `self.has_builder()` is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

`get_state ()`

`get_stored_implicit ()`

Fetch the stored implicit dependencies

`get_stored_info ()`

`get_string (for_signature)`

This is a convenience function designed primarily to be used in command generators (i.e., `CommandGeneratorActions` or Environment variables that are callable), which are called with a `for_signature` argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to `str(Node)` when converting a `Node` to a string, passing in the `for_signature` parameter, such that we will call `Node.for_signature()` or `str(Node)` properly, depending on whether we are calculating a signature or actually constructing a command line.

`get_subst_proxy ()`

This method is expected to return an object that will function exactly like this `Node`, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some `Nodes` would like to implement a `__getattr__()` method, but putting that in the `Node` type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return `self` if no new functionality is needed for Environment substitution.

`get_suffix ()`

`get_target_scanner ()`

`get_text_contents ()`

This attempts to figure out what the encoding of the text is based upon the BOM bytes, and then decodes the contents so that it's a valid python string.

`get_timestamp ()`

`get_tpath ()`

`getmtime ()`

`getsize ()`

`has_builder ()`

Return whether this `Node` has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if `node.builder: ...`"). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the

`__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

`has_explicit_builder ()`

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

`has_src_builder ()`

Return whether this Node has a source builder or not.

If this Node doesn't have an explicit source code builder, this is where we figure out, on the fly, if there's a transparent source code builder for it.

Note that if we found a source builder, we also set the `self.builder` attribute, so that all of the methods that actually *build* this file don't have to do anything different.

`ignore`

`ignore_set`

`implicit`

`implicit_set`

`includes`

`is_derived ()`

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

`is_explicit`

`is_literal ()`

Always pass the string representation of a Node to the command interpreter literally.

`is_sconscript ()`

Returns true if this node is an sconscript

`is_under (dir)`

`is_up_to_date ()`

Check for whether the Node is current In all cases `self` is the target we're checking to see if it's up to date

`isdir ()`

`isfile ()`

`islink ()`

`linked`

`lstat ()`

`make_ready ()`

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

`md5_chunksize = 64`

missing ()**multiple_side_effect_has_builder ()**

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name**new_binfo ()****new_ninfo ()****ninfo****nocache****noclean****on_disk_entries****postprocess ()**

Clean up anything we don't need to hang onto after we've been built.

precious**prepare ()**

Prepare for this file to be created.

prerequisites**pseudo****push_to_cache ()**

Try to push the node into a cache

ref_count**rel_path (other)****release_target_info ()**

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

We'd like to remove a lot more attributes like `self.sources` and `self.sources_set`, but they might get used in a next build step. For example, during configuration the source files for a built `E{*}.o` file are used to figure out which linker to use for the resulting Program (`gcc` vs. `g++`)! That's why we check for the 'keep_targetinfo' attribute, config Nodes and the Interactive mode just don't allow an early release of most variables.

In the same manner, we can't simply remove the `self.attributes` here. The smart linking relies on the shared flag, and some parts of the java Tool use it to transport information about nodes...

@see: `built()` and `Node.release_target_info()`

released_target_info**remove ()**

Remove this file.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

scanner_paths

searched

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_local ()

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_src_builder (builder)

Set the source code builder for this node.

set_state (state)

side_effect

side_effects

sources

sources_set

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcdir

srcnode ()

If this node is in a build path, return the node corresponding to its source file. Otherwise, return ourself.

stat ()

state

store_info

str_for_display ()

target_from_source (prefix, suffix, splitext=<function splitext>)

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix.

Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers

variant_dirs

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

wkids

class SCons.Node.FS.FileBuildInfo

Bases: SCons.Node.BuildInfoBase

This is info loaded from sconsign.

Attributes unique to FileBuildInfo:

dependency_map : Caches file->csig mapping

for all dependencies. Currently this is only used when using MD5-timestamp decider. It's used to ensure that we copy the correct csig from the previous build to be written to .sconsign when current build is done. Previously the matching of csig to file was strictly by order they appeared in bdepends, bsources, or bimplicit, and so a change in order or count of any of these could yield writing wrong csig, and then false positive rebuilds

bact

bactsig

bdepends

bdependssigs

bimplicit

bimplicitssigs

bsources

bsourcesigs

convert_from_sconsign(dir, name)

Converts a newly-read FileBuildInfo object for in-SCons use

For normal up-to-date checking, we don't have any conversion to perform—but we're leaving this method here to make that clear.

convert_to_sconsign()

Converts this FileBuildInfo object for writing to a .sconsign file

This replaces each Node in our various dependency lists with its usual string representation: relative to the top-level SConstruct directory, or an absolute path if it's outside.

current_version_id = 2

dependency_map

format(names=0)

merge(other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a '___dict___' slot is added, it should be updated instead of replaced.

prepare_dependencies()

Prepares a FileBuildInfo object for explaining what changed

The bsources, bdepends and bimplicit lists have all been stored on disk as paths relative to the top-level SConstruct directory. Convert the strings to actual Nodes (for use by the `-debug=explain` code and `-implicit-cache`).

exception SCons.Node.FS.FileBuildInfoFileToCsigMappingError

Bases: **Exception**

args

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

class SCons.Node.FS.FileFinder

Bases: **object**

_find_file_key(filename, paths, verbose=None)

filedir_lookup (p, fd=None)

A helper method for `find_file()` that looks up a directory for a file we're trying to find. This only creates the Dir Node if it exists on-disk, since if the directory doesn't exist we know we won't find any files in it... :-)

It would be more compact to just use this as a nested function with a default keyword argument (see the commented-out version below), but that doesn't work unless you have nested scopes, so we define it here just so this work under Python 1.5.2.

find_file (filename, paths, verbose=None)

Find a node corresponding to either a derived file or a file that exists already.

Only the first file found is returned, and none is returned if no file is found.

filename: A filename to find paths: A list of directory path *nodes* to search in. Can be represented as a list, a tuple, or a callable that is called with no arguments and returns the list or tuple.

returns The node created from the found file.

class SCons.Node.FS.FileNodeInfo

Bases: **SCons.Node.NodeInfoBase**

convert (node, val)

csig

current_version_id = 2

field_list = ['csig', 'timestamp', 'size']

format (field_list=None, names=0)

fs = None

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

size

str_to_node (s)

timestamp

update (node)

SCons.Node.FS.LinkFunc (target, source, env)

Relative paths cause problems with symbolic links, so we use absolute paths, which may be a problem for people who want to move their soft-linked src-trees around. Those people should use the 'hard-copy' mode, softlinks cannot be used for that; at least I have no idea how ...

class SCons.Node.FS.LocalFS

Bases: **object**

This class implements an abstraction layer for operations involving a local file system. Essentially, this wraps any function in the `os`, `os.path` or `shutil` modules that we use to actually go do anything with or to the local file system.

Note that there's a very good chance we'll refactor this part of the architecture in some way as we really implement the interface(s) for remote file system Nodes. For example, the right architecture might be to have this be a subclass instead of a base class. Nevertheless, we're using this as a first step in that direction.

We're not using `chdir()` yet because the calling subclass method needs to use `os.chdir()` directly to avoid recursion. Will we really need this one?

chmod (path, mode)

copy (src, dst)

copy2 (src, dst)

exists (path)**getmtime** (path)**getsize** (path)**isdir** (path)**isfile** (path)**islink** (path)**link** (src, dst)**listdir** (path)**lstat** (path)**makedirs** (path)**mkdir** (path)**open** (path)**readlink** (file)**rename** (old, new)**stat** (path)**symlink** (src, dst)**unlink** (path)**SCons.Node.FS.LocalString** (target, source, env)**SCons.Node.FS.MkdirFunc** (target, source, env)**class SCons.Node.FS.RootDir** (drive, fs)Bases: **SCons.Node.FS.Dir**

A class for the root directory of a file system.

This is the same as a Dir class, except that the path separator ('/' or "\") is actually part of the name, so we don't need to add a separator when creating the path names of entries within this directory.

class AttrsBases: **object****shared****BuildInfo**alias of **DirBuildInfo****Decider** (function)**Dir** (name, create=True)

Looks up or creates a directory node named 'name' relative to this directory.

Entry (name)

Looks up or creates an entry node named 'name' relative to this directory.

File (name)

Looks up or creates a file node named 'name' relative to this directory.

GetTag (key)

Return a user-defined tag.

NodeInfo

alias of **DirNodeInfo**

RDirs (pathlist)

Search for a list of directories in the Repository list.

Rfindalldirs (pathlist)

Return all of the directories for a given path list, including corresponding “backing” directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

Tag (key, value)

Add a user-defined tag.

_Dir__clearRepositoryCache (duplicate=None)

Called when we change the repository(ies) for a directory. This clears any cached information that is invalidated by changing the repository.

_Dir__resetDuplicate (node)**_Rfindalldirs_key (pathlist)****_abspath****_add_child (collection, set, child)**

Adds ‘child’ to ‘collection’, first checking ‘set’ to see if it’s already present.

_children_get ()**_children_reset ()****_create ()**

Create this directory, silently and without worrying about whether the builder is the default or not.

_func_exists**_func_get_contents****_func_is_derived****_func_rexists****_func_sconsign****_func_target_from_source****_get_scanner (env, initial_scanner, root_node_scanner, kw)****_get_str ()****_glob1 (pattern, ondisk=True, source=False, strings=False)**

Globs for and returns a list of entry names matching a single pattern in this directory.

This searches any repositories and source directories for corresponding entries and returns a Node (or string) relative to the current directory if an entry is found anywhere.

TODO: handle pattern with no wildcard

_labspath

`_local``_lookupDict``_lookup_abs (p, klass, create=1)`

Fast (?) lookup of a *normalized* absolute path.

This method is intended for use by internal lookups with already-normalized path data. For general-purpose lookups, use the `FS.Entry()`, `FS.Dir()` or `FS.File()` methods.

The caller is responsible for making sure we're passed a normalized absolute path; we merely let Python's dictionary look up and return the One True Node.FS object for the path.

If a Node for the specified "p" doesn't already exist, and "create" is specified, the Node may be created after recursive invocation to find or create the parent directory or directories.

`_memo``_morph ()`

Turn a file system Node (either a freshly initialized directory object or a separate Entry object) into a proper directory object.

Set up this directory's entries and hook it into the file system tree. Specify that directories (this Node) don't use signatures for calculating whether they're current.

`_path``_path_elements``_proxy``_rel_path_key (other)``_save_str ()``_sconsign``_specific_sources``_srcdir_find_file_key (filename)``_tags``_tpath``abspath``addRepository (dir)``add_dependency (depend)`

Adds dependencies.

`add_ignore (depend)`

Adds dependencies to ignore.

`add_prerequisite (prerequisite)`

Adds prerequisites

`add_source (source)`

Adds sources.

`add_to_implicit (deps)``add_to_waiting_parents (node)`

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

add_to_waiting_s_e (node)

add_wkid (wkid)

Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

Return a list of all the node's direct children.

alter_targets ()

Return any corresponding targets in a variant directory.

always_build

attributes

binfo

build (**kw)

A null "builder" for directories.

builder

builder_set (builder)

built ()

Called just after this node is successfully built.

cached

cachedir_csig

cachesig

changed (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build

children (scan=1)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

contentsig

cwd

del_binfo ()

Delete the build info from this node.

depends

depends_set

dir

dir_on_disk (name)

dirname

disambiguate (must_exist=None)

diskcheck_match ()

do_duplicate (src)

duplicate

entries

entry_abspath (name)

entry_exists_on_disk (name)

Searches through the file/dir entries of the current directory, and returns True if a physical entry with the given name could be found.

@see reentry_exists_on_disk

entry_labspath (name)

entry_path (name)

entry_tpath (name)

env

env_set (env, safe=0)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()

file_on_disk (name)

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs

Reference to parent Node.FS object

get_repositories ()

Returns a list of repositories for this directory.

get_abspath ()

Get the absolute path of the file.

get_all_rdirs ()**get_binfo ()**

Fetch a node's build information.

node - the node whose sources will be collected
cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()**get_contents ()**

Return content signatures and names of all our children separated by new-lines. Ensure that the nodes are sorted.

get_csig ()

Compute the content signature for Directory nodes. In general, this is not needed and the content signature is not stored in the DirNodeInfo. However, if `get_contents` on a Dir node is called which has a child directory, the child directory should return the hash of its contents.

get_dir ()**get_env ()****get_env_scanner (env, kw={})****get_executor (create=1)**

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return this directory's implicit dependencies.

We don't bother caching the results because the scan typically shouldn't be requested more than once (as opposed to scanning .h file contents, which can be requested as many times as the files is #included by other files).

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()

get_labspath ()

Get the absolute path of the file.

get_ninfo ()

get_path (dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()

get_stored_implicit ()

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()

get_target_scanner ()

get_text_contents ()

We already emit things in text, so just return the binary version.

get_timestamp ()

Return the latest timestamp from among our children

get_tpath ()

getmtime ()

getsize ()

glob (pathname, ondisk=True, source=False, strings=False, exclude=None)

Returns a list of Nodes (or strings) matching a specified pathname pattern.

Pathname patterns follow UNIX shell semantics: * matches any-length strings of any characters, ? matches any character, and [] can enclose lists or ranges of characters. Matches do not span directory separators.

The matches take into account Repositories, returning local Nodes if a corresponding entry exists in a Repository (either an in-memory Node or something on disk).

By default, the glob() function matches entries that exist on-disk, in addition to in-memory Nodes. Setting the “ondisk” argument to False (or some other non-true value) causes the glob() function to only match in-memory Nodes. The default behavior is to return both the on-disk and in-memory Nodes.

The “source” argument, when true, specifies that corresponding source Nodes must be returned if you’re globbing in a build directory (initialized with VariantDir()). The default behavior is to return Nodes local to the VariantDir().

The “strings” argument, when true, returns the matches as strings, not Nodes. The strings are path names relative to this directory.

The “exclude” argument, if not None, must be a pattern or a list of patterns following the same UNIX shell semantics. Elements matching a least one pattern of this list will be excluded from the result.

The underlying algorithm is adapted from the glob.glob() function in the Python library (but heavily modified), and uses fnmatch() under the covers.

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore

ignore_set

implicit

implicit_set

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when duplicate=0 and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

If any child is not up-to-date, then this directory isn’t, either.

isdir ()

isfile ()**islink ()****link (srcdir, duplicate)**

Set this directory as the variant directory for the supplied source directory.

linked**lstat ()****make_ready ()**

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()**multiple_side_effect_has_builder ()**

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name**new_binfo ()****new_ninfo ()****ninfo****nocache****noclean****on_disk_entries****path****postprocess ()**

Clean up anything we don't need to hang onto after we've been built.

precious**prepare ()**

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

rdir ()

ref_count

rel_path (other)

Return a path to "other" relative to this directory.

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

released_target_info

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

reentry_exists_on_disk (name)

Searches through the file/dir entries of the current *and* all its remote directories (repos), and returns True if a physical entry with the given name could be found. The local directory (self) gets searched first, so repositories take a lower precedence regarding the searching order.

@see entry_exists_on_disk

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

A directory does not get scanned.

scanner_paths

sconsign ()

Return the .sconsign file info for this directory.

searched

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_local ()

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_src_builder (builder)

Set the source code builder for this node.

set_state (state)

side_effect

side_effects

sources

sources_set

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcdir

srcdir_duplicate (name)

srcdir_find_file (filename)**srcdir_list** ()**srcnode** ()Dir has a special need for srcnode()...if we have a srcdir attribute set, then that *is* our srcnode.**stat** ()**state****store_info****str_for_display** ()**target_from_source** (prefix, suffix, splitext=<function splitext>)

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix.

Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers**up** ()**variant_dirs****visited** ()

Called just after this node has been visited (with or without a build).

waiting_parents**waiting_s_e****walk** (func, arg)

Walk this directory tree by calling the specified function for each directory in the tree.

This behaves like the `os.path.walk()` function, but for in-memory `Node.FS.Dir` objects. The function takes the same arguments as the functions passed to `os.path.walk()`:

func(arg, dirname, fnames)

Except that “dirname” will actually be the directory *Node*, not the string. The ‘.’ and ‘..’ entries are excluded from fnames. The fnames list may be modified in-place to filter the subdirectories visited or otherwise impose a specific order. The “arg” argument is always passed to func() and may be used in any way (or ignored, passing None is common).**wkids**`SCons.Node.FS.UnlinkFunc` (target, source, env)`class SCons.Node.FS._Null`Bases: `object``SCons.Node.FS._classEntry`alias of `SCons.Node.FS.Entry``SCons.Node.FS._copy_func` (fs, src, dest)`SCons.Node.FS._hardlink_func` (fs, src, dst)`SCons.Node.FS._my_normcase` (x)`SCons.Node.FS._my_splitdrive` (p)`SCons.Node.FS._softlink_func` (fs, src, dst)`SCons.Node.FS.diskcheck_types` ()

`SCons.Node.FS.do_diskcheck_match` (node, predicate, errorfmt)

`SCons.Node.FS.find_file` (filename, paths, verbose=None)

Find a node corresponding to either a derived file or a file that exists already.

Only the first file found is returned, and none is returned if no file is found.

filename: A filename to find paths: A list of directory path *nodes* to search in. Can be represented as a list, a tuple, or a callable that is called with no arguments and returns the list or tuple.

returns The node created from the found file.

`SCons.Node.FS.get_MkdirBuilder` ()

`SCons.Node.FS.get_default_fs` ()

`SCons.Node.FS.has_glob_magic` (s)

`SCons.Node.FS.ignore_diskcheck_match` (node, predicate, errorfmt)

`SCons.Node.FS.initialize_do_splitdrive` ()

`SCons.Node.FS.invalidate_node_memos` (targets)

Invalidate the memoized values of all Nodes (files or directories) that are associated with the given entries. Has been added to clear the cache of nodes affected by a direct execution of an action (e.g. Delete/Copy/Chmod).

Existing Node caches become inconsistent if the action is run through Execute(). The argument *targets* can be a single Node object or filename, or a sequence of Nodes/filenames.

`SCons.Node.FS.needs_normpath_match` ()

Matches zero or more characters at the beginning of the string.

`SCons.Node.FS.save_strings` (val)

`SCons.Node.FS.sconsign_dir` (node)

Return the .sconsign file info for this directory, creating it first if necessary.

`SCons.Node.FS.sconsign_none` (node)

`SCons.Node.FS.set_diskcheck` (list)

`SCons.Node.FS.set_duplicate` (duplicate)

SCons.Node.Python module

`scons.Node.Python`

Python nodes.

`class SCons.Node.Python.Value` (value, built_value=None, name=None)

Bases: `SCons.Node.Node`

A class for Python variables, typically passed on the command line or generated by a script, but not from a file or some other source.

`class Attrs`

Bases: `object`

`shared`

`BuildInfo`

alias of `ValueBuildInfo`

`Decider` (function)

`GetTag` (key)

Return a user-defined tag.

`NodeInfo`

alias of `ValueNodeInfo`

`Tag` (key, value)

Add a user-defined tag.

`_add_child (collection, set, child)`
 Adds 'child' to 'collection', first checking 'set' to see if it's already present.

`_children_get ()`

`_children_reset ()`

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_target_from_source`

`_get_scanner (env, initial_scanner, root_node_scanner, kw)`

`_memo`

`_specific_sources`

`_tags`

`add_dependency (depend)`
 Adds dependencies.

`add_ignore (depend)`
 Adds dependencies to ignore.

`add_prerequisite (prerequisite)`
 Adds prerequisites

`add_source (source)`
 Adds sources.

`add_to_implicit (deps)`

`add_to_waiting_parents (node)`
 Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not.
 (Note that the returned values are intended to be used to increment a reference count, so don't think you can
 "clean up" this function by using True and False instead...)

`add_to_waiting_s_e (node)`

`add_wkid (wkid)`
 Add a node to the list of kids waiting to be evaluated

`all_children (scan=1)`
 Return a list of all the node's direct children.

`alter_targets ()`
 Return a list of alternate targets for this Node.

`always_build`

`attributes`

`binfo`

build (kw)**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the prepare() method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

builder**builder_set (builder)****built ()**

Called just after this node is successfully built.

cached**changed (node=None, allowcache=False)**

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build**children (scan=1)**

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()**del_binfo ()**

Delete the build info from this node.

depends**depends_set****disambiguate (must_exist=None)****env****env_set (env, safe=0)****executor****executor_cleanup ()**

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()**for_signature ()**

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

get_abspath ()

Return an absolute path to the Node. This will return simply `str(Node)` by default, but for Node types that have a concept of relative path, this might return something different.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected
cache - alternate node to use for the signature cache
returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()**get_contents ()**

Get contents for signature calculations. :return: bytes

get_csig (calc=None)

Because we're a Python value node and don't have a real timestamp, we get to ignore the calculator and just use the value contents.

Returns string. Ideally string of hex digits. (Not bytes)

get_env ()**get_env_scanner (env, kw={})****get_executor (create=1)**

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_ninfo ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: “self” is the target being built, “node” is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()**get_stored_implicit ()**

Fetch the stored implicit dependencies

get_stored_info ()**get_string (for_signature)**

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()**get_target_scanner ()****get_text_contents ()**

By the assumption that the node.built_value is a deterministic product of the sources, the contents of a Value are the concatenation of all the contents of its sources. As the value need not be built when get_contents() is called, we cannot use the actual node.built_value.

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling __getattr__ for both the __len__ and __nonzero__ attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore**ignore_set****implicit****implicit_set****includes****is_derived ()**

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The `SCons.Node.Alias` and `SCons.Node.Python.Value` subclasses rebind their `current()` method to this method.

linked

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if `node.builder: ...`”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the `BuildInfo` structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the `BuildInfo` structure.

prerequisites**pseudo****push_to_cache ()**

Try to push a node into a cache

read ()

Return the value. If necessary, the value is built.

ref_count**release_target_info ()**

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()**select_scanner (scanner)**

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)**set_nocache (nocache=1)**

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)
Set the Node's precious value.

set_pseudo (pseudo=True)
Set the Node's precious value.

set_specific_source (source)

set_state (state)

side_effect

side_effects

sources

sources_set

state

store_info

str_for_display ()

target_peers

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

wkids

write (built_value)

Set the value of the node.

class SCons.Node.Python.ValueBuildInfo

Bases: SCons.Node.BuildInfoBase

bact

bactsig

bdepends

bdependsigs

bimplicit

bimplicitSIGs

bsources

bsourcesigs

current_version_id = 2

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

```
class SCons.Node.Python.ValueNodeInfo
```

```
  Bases: SCons.Node.NodeInfoBase
```

```
  convert (node, val)
```

```
  csig
```

```
  current_version_id = 2
```

```
  field_list = ['csig']
```

```
  format (field_list=None, names=0)
```

```
  merge (other)
```

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

```
  str_to_node (s)
```

```
  update (node)
```

```
SCons.Node.Python.ValueWithMemo (value, built_value=None, name=None)
```

```
  Memoized Value() node factory.
```

Module contents

SCons.Node

The Node package for the SCons software construction utility.

This is, in many ways, the heart of SCons.

A Node is where we encapsulate all of the dependency information about any thing that SCons can build, or about any thing which SCons can use to build some other thing. The canonical "thing," of course, is a file, but a Node can also represent something remote (like a web page) or something completely abstract (like an Alias).

Each specific type of "thing" is specifically represented by a subclass of the Node base class: `Node.FS.File` for files, `Node.Alias` for aliases, etc. Dependency information is kept here in the base class, and information specific to files/aliases/etc. is in the subclass. The goal, if we've done this correctly, is that any type of "thing" should be able to depend on any other type of "thing."

```
SCons.Node.Annotate (node)
```

```
class SCons.Node.BuildInfoBase
```

```
  Bases: object
```

The generic base class for build information for a Node.

This is what gets stored in a `.sconsign` file for each target file. It contains a `NodeInfo` instance for this node (signature information that's specific to the type of Node) and direct attributes for the generic build stuff we have to track: sources, explicit dependencies, implicit dependencies, and action information.

```
  bact
```

```
  bactsig
```

```
  bdepends
```

```
  bdependsigs
```

```
  bimplicit
```

```
  bimplicitSIGs
```

bsources**bsourcesigs****current_version_id = 2****merge (other)**

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

class **SCons.Node.Node**Bases: **object**

The base Node class, for entities that we know how to build, or use to build other Nodes.

class **Attrs**Bases: **object****shared****BuildInfo**alias of **BuildInfoBase****Decider (function)****GetTag (key)**

Return a user-defined tag.

NodeInfoalias of **NodeInfoBase****Tag (key, value)**

Add a user-defined tag.

_add_child (collection, set, child)

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

_children_get ()**_children_reset ()****_func_exists****_func_get_contents****_func_is_derived****_func_rexists****_func_target_from_source****_get_scanner (env, initial_scanner, root_node_scanner, kw)****_memo****_specific_sources****_tags****add_dependency (depend)**

Adds dependencies.

add_ignore (depend)

Adds dependencies to ignore.

add_prerequisite (prerequisite)

Adds prerequisites

add_source (source)

Adds sources.

add_to_implicit (deps)**add_to_waiting_parents** (node)

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

add_to_waiting_s_e (node)**add_wkid** (wkid)

Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

Return a list of all the node's direct children.

alter_targets ()

Return a list of alternate targets for this Node.

always_build**attributes****binfo****build** (**kw)

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the prepare() method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

builder**builder_set** (builder)**built** ()

Called just after this node is successfully built.

cached**changed** (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build

children (*scan=1*)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

del_binfo ()

Delete the build info from this node.

depends

depends_set

disambiguate (*must_exist=None*)

env

env_set (*env, safe=0*)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exist?

explain ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

get_abspath ()

Return an absolute path to the Node. This will return simply `str(Node)` by default, but for Node types that have a concept of relative path, this might return something different.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected
cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path(scanner)

Fetch the appropriate scanner path for this node.

get_builder(default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig()

get_contents()

Fetch the contents of the entry.

get_csig()

get_env()

get_env_scanner(env, kw={})

get_executor(create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes(env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps(env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_ninfo()

get_source_scanner(node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state()

get_stored_implicit()

Fetch the stored implicit dependencies

get_stored_info()

get_string(for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()**get_target_scanner ()****has_builder ()**

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore**ignore_set****implicit****implicit_set****includes****is_derived ()**

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit**is_literal ()**

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_up_to_date ()

Default check for whether the Node is current: unknown Node subtypes are always out of date, so they will always get built.

linked**make_ready ()**

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()**multiple_side_effect_has_builder ()**

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

new_binfo ()

new_ninfo ()**ninfo****nocache****noclean****postprocess ()**

Clean up anything we don't need to hang onto after we've been built.

precious**prepare ()**

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites**pseudo****push_to_cache ()**

Try to push a node into a cache

ref_count**release_target_info ()**

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()**select_scanner (scanner)**

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.**set_always_build (always_build=1)**

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)**set_nocache (nocache=1)**

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)**set_state (state)****side_effect****side_effects****sources****sources_set****state****store_info****target_peers****visited ()**

Called just after this node has been visited (with or without a build).

waiting_parents**waiting_s_e****wkids****class SCons.Node.NodeInfoBase**Bases: **object**

The generic base class for signature information for a Node.

Node subclasses should subclass NodeInfoBase to provide their own logic for dealing with their own Node-specific signature information.

convert (node, val)

current_version_id = 2

format (field_list=None, names=0)

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

update (node)

class SCons.Node.**NodeList** (initlist=None)

Bases: **collections.UserList**

_UserList__cast (other)

_abc_impl = `<_abc_data object>`

append (item)

S.append(value) – append value to the end of the sequence

clear () → None -- remove all items from S

copy ()

count (value) → integer -- return number of occurrences of value

extend (other)

S.extend(iterable) – extend sequence by appending elements from the iterable

index (value[, start[, stop]]) → integer -- return first index of value.

Raises ValueError if the value is not present.

Supporting start and stop arguments is optional, but recommended.

insert (i, item)

S.insert(index, value) – insert value before index

pop ([, index]) → item -- remove and return item at index (default last).

Raise IndexError if list is empty or index is out of range.

remove (item)

S.remove(value) – remove first occurrence of value. Raise ValueError if the value is not present.

reverse ()

S.reverse() – reverse *IN PLACE*

sort (*args, **kws)

class SCons.Node.**Walker** (node, kids_func=<function get_children>, cycle_func=<function ignore_cycle>, eval_func=<function do_nothing>)

Bases: **object**

An iterator for walking a Node tree.

This is depth-first, children are visited before the parent. The Walker object can be initialized with any node, and returns the next node on the descent with each `get_next()` call. `get` the children of a node instead of calling `'children'`. `'cycle_func'` is an optional function that will be called when a cycle is detected.

This class does not get caught in node cycles caused, for example, by C header file include loops.

get_next ()

Return the next node for this walk of the tree.

This function is intentionally iterative, not recursive, to sidestep any issues of stack size limitations.

is_done ()

`SCons.Node.changed_since_last_build_alias` (node, target, prev_ni, repo_node=None)

`SCons.Node.changed_since_last_build_entry` (node, target, prev_ni, repo_node=None)

`SCons.Node.changed_since_last_build_node` (node, target, prev_ni, repo_node=None)

Must be overridden in a specific subclass to return True if this Node (a dependency) has changed since the last time it was used to build the specified target. `prev_ni` is this Node's state (for example, its file timestamp, length, maybe content signature) as of the last time the target was built.

Note that this method is called through the dependency, not the target, because a dependency Node must be able to use its own logic to decide if it changed. For example, File Nodes need to obey if we're configured to use timestamps, but Python Value Nodes never use timestamps and always use the content. If this method were called through the target, then each Node's implementation of this method would have to have more complicated logic to handle all the different Node types on which it might depend.

`SCons.Node.changed_since_last_build_python` (node, target, prev_ni, repo_node=None)

`SCons.Node.changed_since_last_build_state_changed` (node, target, prev_ni, repo_node=None)

`SCons.Node.classname` (obj)

`SCons.Node.decide_source` (node, target, prev_ni, repo_node=None)

`SCons.Node.decide_target` (node, target, prev_ni, repo_node=None)

`SCons.Node.do_nothing` (node, parent)

`SCons.Node.do_nothing_node` (node)

`SCons.Node.exists_always` (node)

`SCons.Node.exists_base` (node)

`SCons.Node.exists_entry` (node)

Return if the Entry exists. Check the file system to see what we should turn into first. Assume a file if there's no directory.

`SCons.Node.exists_file` (node)

`SCons.Node.exists_none` (node)

`SCons.Node.get_children` (node, parent)

`SCons.Node.get_contents_dir` (node)

Return content signatures and names of all our children separated by new-lines. Ensure that the nodes are sorted.

`SCons.Node.get_contents_entry` (node)

Fetch the contents of the entry. Returns the exact binary contents of the file.

`SCons.Node.get_contents_file` (node)

`SCons.Node.get_contents_none` (node)

`SCons.Node.ignore_cycle` (node, stack)

`SCons.Node.is_derived_node` (node)

Returns true if this node is derived (i.e. built).

`SCons.Node.is_derived_none` (node)

`SCons.Node.rexists_base` (node)

`SCons.Node.rexists_node` (node)

`SCons.Node.rexists_none` (node)

`SCons.Node.store_info_file` (node)

`SCons.Node.store_info_pass` (node)

`SCons.Node.target_from_source_base` (node, prefix, suffix, splitext)

`SCons.Node.target_from_source_none` (node, prefix, suffix, splitext)

SCons.Platform package

Submodules

SCons.Platform.aix module

SCons.Platform.aix

Platform-specific initialization for IBM AIX systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.aix.**generate** (env)

SCons.Platform.aix.**get_xlc** (env, xlc=None, packages=[])

SCons.Platform.cygwin module

SCons.Platform.cygwin

Platform-specific initialization for Cygwin systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.cygwin.**generate** (env)

SCons.Platform.darwin module

SCons.Platform.darwin

Platform-specific initialization for Mac OS X systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.darwin.**generate** (env)

SCons.Platform.hpux module

SCons.Platform.hpux

Platform-specific initialization for HP-UX systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.hpux.**generate** (env)

SCons.Platform.irix module

SCons.Platform.irix

Platform-specific initialization for SGI IRIX systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.irix.**generate** (env)

SCons.Platform.mingw module

SCons.Platform.mingw

Platform-specific initialization for the MinGW system.

SCons.Platform.os2 module

SCons.Platform.os2

Platform-specific initialization for OS/2 systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.os2.**generate** (env)***SCons.Platform.posix module***

SCons.Platform.posix

Platform-specific initialization for POSIX (Linux, UNIX, etc.) systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.posix.**escape** (arg)
escape shell special charactersSCons.Platform.posix.**exec_popen3** (l, env, stdout, stderr)SCons.Platform.posix.**exec_subprocess** (l, env)SCons.Platform.posix.**generate** (env)SCons.Platform.posix.**piped_env_spawn** (sh, escape, cmd, args, env, stdout, stderr)SCons.Platform.posix.**subprocess_spawn** (sh, escape, cmd, args, env)***SCons.Platform.sunos module***

SCons.Platform.sunos

Platform-specific initialization for Sun systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.sunos.**generate** (env)***SCons.Platform.virtualenv module***

SCons.Platform.virtualenv

Support for virtualenv.

SCons.Platform.virtualenv.**ImportVirtualenv** (env)
Copies virtualenv-related environment variables from OS environment to env['ENV'] and prepends virtualenv's PATH to env['ENV']['PATH'].SCons.Platform.virtualenv.**IsInVirtualenv** (path)
Returns True, if **path** is under virtualenv's home directory. If not, or if we don't use virtualenv, returns False.SCons.Platform.virtualenv.**Virtualenv** ()
Returns path to the virtualenv home if scons is executing within a virtualenv or None, if not.SCons.Platform.virtualenv.**__enable_virtualenv_default** ()SCons.Platform.virtualenv.**__ignore_virtualenv_default** ()SCons.Platform.virtualenv.**__inject_venv_path** (env, path_list=None)
Modify environment such that SCons will take into account its virtualenv when running external tools.SCons.Platform.virtualenv.**__inject_venv_variables** (env)SCons.Platform.virtualenv.**__is_path_in** (path, base)
Returns true, if **path** is located under the **base** directory.SCons.Platform.virtualenv.**__running_in_virtualenv** ()

Returns True, if scons is executed within a virtualenv

`SCons.Platform.virtualenv.select_paths_in_venv(path_list)`

Returns a list of paths from **path_list** which are under virtualenv's home directory.

SCons.Platform.win32 module

`SCons.Platform.win32`

Platform-specific initialization for Win32 systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`class SCons.Platform.win32.ArchDefinition(arch, synonyms=[])`

Bases: **object**

Determine which windows CPU were running on. A class for defining architecture-specific settings and logic.

`SCons.Platform.win32.escape(x)`

`SCons.Platform.win32.exec_spawn(l, env)`

`SCons.Platform.win32.generate(env)`

`SCons.Platform.win32.get_architecture(arch=None)`

Returns the definition for the specified architecture string.

If no string is specified, the system default is returned (as defined by the `PROCESSOR_ARCHITECTURE` or `PROCESSOR_ARCHITECTURE` environment variables).

`SCons.Platform.win32.get_program_files_dir()`

Get the location of the program files directory

`SCons.Platform.win32.get_system_root()`

`SCons.Platform.win32.piped_spawn(sh, escape, cmd, args, env, stdout, stderr)`

`SCons.Platform.win32.spawn(sh, escape, cmd, args, env)`

`SCons.Platform.win32.spawnve(mode, file, args, env)`

Module contents

`SCons.Platform`

SCons platform selection.

This looks for modules that define a callable object that can modify a construction environment as appropriate for a given platform.

Note that we take a more simplistic view of "platform" than Python does. We're looking for a single string that determines a set of tool-independent variables with which to initialize a construction environment. Consequently, we'll examine both `sys.platform` and `os.name` (and anything else that might come in to play) in order to return some specification which is unique enough for our purposes.

Note that because this subsystem just *selects* a callable that can modify a construction environment, it's possible for people to define their own "platform specification" in an arbitrary callable function. No one needs to use or tie in to this subsystem in order to roll their own platform definition.

`SCons.Platform.DefaultToolList(platform, env)`

Select a default tool list for the specified platform.

`SCons.Platform.Platform(name='darwin')`

Select a canned Platform specification.

`class SCons.Platform.PlatformSpec(name, generate)`

Bases: **object**

`class SCons.Platform.TempFileMunge(cmd, cmdstr=None)`

Bases: **object**

Convert long command lines to use a temporary file.

You can set an Environment variable (usually `TEMPFILE`) to this, then call it with a string argument, and it will perform temporary file substitution on it. This is used to circumvent limitations on the length of command lines. Example:

```
env["TEMPFILE"] = TempFileMunge
env["LINKCOM"] = "$ {TEMPFILE('$LINK $TARGET $SOURCES', '$LINKCOMSTR')} "
```

By default, the name of the temporary file used begins with a prefix of '@'. This may be configured for other tool chains by setting the `TEMPFILEPREFIX` variable. Example:

```
env["TEMPFILEPREFIX"] = '-@'           # diab compiler
env["TEMPFILEPREFIX"] = '-via'        # arm tool chain
env["TEMPFILEPREFIX"] = ''           # (the empty string) PC Lint
```

You can configure the extension of the temporary file through the `TEMPFILESUFFIX` variable, which defaults to '.lnk' (see comments in the code below). Example:

```
env["TEMPFILESUFFIX"] = '.lnk'       # PC Lint
```

Entries in the temporary file are separated by the value of the `TEMPFILEARGJOIN` variable, which defaults to an OS-appropriate value.

```
_print_cmd_str(target, source, env, cmdstr)
```

```
SCons.Platform.platform_default ()
```

Return the platform string for our execution environment.

The returned value should map to one of the `SCons/Platform/*.py` files. Since `scons` is architecture independent, though, we don't care about the machine architecture.

```
SCons.Platform.platform_module (name='darwin')
```

Return the imported module for the platform.

This looks for a module name that matches the specified argument. If the name is unspecified, we fetch the appropriate default for our execution environment.

SCons.Scanner package

Submodules

SCons.Scanner.C module

```
SCons.Scanner.C
```

This module implements the dependency scanner for C/C++ code.

```
SCons.Scanner.C.CConditionalScanner ()
```

Return an advanced conditional Scanner instance for scanning source files

Interprets C/C++ Preprocessor conditional syntax (`#ifdef`, `#if`, `defined`, `#else`, `#elif`, etc.).

```
SCons.Scanner.C.CScanner ()
```

Return a prototype Scanner instance for scanning source files that use the C pre-processor

```
class SCons.Scanner.C.SConsCPPConditionalScanner (*args, **kw)
```

Bases: **`SCons.cpp.PreProcessor`**

SCons-specific subclass of the `cpp.py` module's processing.

We subclass this so that: 1) we can deal with files represented by Nodes, not strings; 2) we can keep track of the files that are missing.

```
_do_if_else_condition(condition)
```

Common logic for evaluating the conditions on `#if`, `#ifdef` and `#ifndef` lines.

```
_match_tuples(tuples)
```

```
_parse_tuples(contents)
```

`_process_tuples (tuples, file=None)`

`all_include (t)`

`do_define (t)`

Default handling of a #define line.

`do_elif (t)`

Default handling of a #elif line.

`do_else (t)`

Default handling of a #else line.

`do_endif (t)`

Default handling of a #endif line.

`do_if (t)`

Default handling of a #if line.

`do_ifdef (t)`

Default handling of a #ifdef line.

`do_ifndef (t)`

Default handling of a #ifndef line.

`do_import (t)`

Default handling of a #import line.

`do_include (t)`

Default handling of a #include line.

`do_include_next (t)`

Default handling of a #include line.

`do_nothing (t)`

Null method for when we explicitly want the action for a specific preprocessor directive to do nothing.

`do_undef (t)`

Default handling of a #undef line.

`eval_expression (t)`

Evaluates a C preprocessor expression.

This is done by converting it to a Python equivalent and eval()ing it in the C preprocessor namespace we use to track #define values.

`finalize_result (fname)`

`find_include_file (t)`

Finds the #include file for a given preprocessor tuple.

`initialize_result (fname)`

`process_contents (contents)`

Pre-processes a file contents.

Is used by tests

`process_file (file)`

Pre-processes a file.

This is the main internal entry point.

`read_file (file)`

resolve_include (t)

Resolve a tuple-ized #include line.

This handles recursive expansion of values without "" or <> surrounding the name until an initial " or < is found, to handle #include FILE where FILE is a #define somewhere else.

restore ()

Pops the previous dispatch table off the stack and makes it the current one.

save ()

Pushes the current dispatch table on the stack and re-initializes the current dispatch table to the default.

scons_current_file (t)**start_handling_includes (t=None)**

Causes the PreProcessor object to start processing #import, #include and #include_next lines.

This method will be called when a #if, #ifdef, #ifndef or #elif evaluates True, or when we reach the #else in a #if, #ifdef, #ifndef or #elif block where a condition already evaluated False.

stop_handling_includes (t=None)

Causes the PreProcessor object to stop processing #import, #include and #include_next lines.

This method will be called when a #if, #ifdef, #ifndef or #elif evaluates False, or when we reach the #else in a #if, #ifdef, #ifndef or #elif block where a condition already evaluated True.

tupleize (contents)

Turns the contents of a file into a list of easily-processed tuples describing the CPP lines in the file.

The first element of each tuple is the line's preprocessor directive (#if, #include, #define, etc., minus the initial '#'). The remaining elements are specific to the type of directive, as pulled apart by the regular expression.

class SCons.Scanner.C.SConsCPPConditionalScannerWrapper (name, variable)

Bases: **object**

The SCons wrapper around a cpp.py scanner.

This is the actual glue between the calling conventions of generic SCons scanners, and the (subclass of) cpp.py class that knows how to look for #include lines with reasonably real C-preprocessor-like evaluation of #if/#ifdef/#else/#elif lines.

recurse_nodes (nodes)**select (node)****class SCons.Scanner.C.SConsCPPScanner (*args, **kw)**

Bases: **SCons.cpp.PreProcessor**

SCons-specific subclass of the cpp.py module's processing.

We subclass this so that: 1) we can deal with files represented by Nodes, not strings; 2) we can keep track of the files that are missing.

_do_if_else_condition (condition)

Common logic for evaluating the conditions on #if, #ifdef and #ifndef lines.

_match_tuples (tuples)**_parse_tuples (contents)****_process_tuples (tuples, file=None)****all_include (t)****do_define (t)**

Default handling of a #define line.

do_elif (t)

Default handling of a #elif line.

do_else (t)

Default handling of a #else line.

do_endif (t)

Default handling of a #endif line.

do_if (t)

Default handling of a #if line.

do_ifdef (t)

Default handling of a #ifdef line.

do_ifndef (t)

Default handling of a #ifndef line.

do_import (t)

Default handling of a #import line.

do_include (t)

Default handling of a #include line.

do_include_next (t)

Default handling of a #include line.

do_nothing (t)

Null method for when we explicitly want the action for a specific preprocessor directive to do nothing.

do_undef (t)

Default handling of a #undef line.

eval_expression (t)

Evaluates a C preprocessor expression.

This is done by converting it to a Python equivalent and eval()ing it in the C preprocessor namespace we use to track #define values.

finalize_result (fname)

find_include_file (t)

Finds the #include file for a given preprocessor tuple.

initialize_result (fname)

process_contents (contents)

Pre-processes a file contents.

Is used by tests

process_file (file)

Pre-processes a file.

This is the main internal entry point.

read_file (file)

resolve_include (t)

Resolve a tuple-ized #include line.

This handles recursive expansion of values without "" or <> surrounding the name until an initial " or < is found, to handle #include FILE where FILE is a #define somewhere else.

restore ()

Pops the previous dispatch table off the stack and makes it the current one.

save ()

Pushes the current dispatch table on the stack and re-initializes the current dispatch table to the default.

scons_current_file (t)

start_handling_includes (t=None)

Causes the PreProcessor object to start processing `#import`, `#include` and `#include_next` lines.

This method will be called when a `#if`, `#ifdef`, `#ifndef` or `#elif` evaluates True, or when we reach the `#else` in a `#if`, `#ifdef`, `#ifndef` or `#elif` block where a condition already evaluated False.

stop_handling_includes (t=None)

Causes the PreProcessor object to stop processing `#import`, `#include` and `#include_next` lines.

This method will be called when a `#if`, `#ifdef`, `#ifndef` or `#elif` evaluates False, or when we reach the `#else` in a `#if`, `#ifdef`, `#ifndef` or `#elif` block where a condition already evaluated True.

tupleize (contents)

Turns the contents of a file into a list of easily-processed tuples describing the CPP lines in the file.

The first element of each tuple is the line's preprocessor directive (`#if`, `#include`, `#define`, etc., minus the initial `#`). The remaining elements are specific to the type of directive, as pulled apart by the regular expression.

class `SCons.Scanner.C.SConsCPPScannerWrapper` (name, variable)

Bases: `object`

The SCons wrapper around a `cpp.py` scanner.

This is the actual glue between the calling conventions of generic SCons scanners, and the (subclass of) `cpp.py` class that knows how to look for `#include` lines with reasonably real C-preprocessor-like evaluation of `#if/#ifdef/#else/#elif` lines.

recurse_nodes (nodes)

select (node)

`SCons.Scanner.C.dictify_CPPDEFINES` (env)

SCons.Scanner.D module

`SCons.Scanner.D`

Scanner for the Digital Mars "D" programming language.

Coded by Andy Friesen 17 Nov 2003

class `SCons.Scanner.D.D`

Bases: `SCons.Scanner.Classic`

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

find_include (include, source_dir, path)

find_include_names (node)

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

scan (node, path=())

select (node)

sort_key (include)

`SCons.Scanner.D.DScanner` ()

Return a prototype Scanner instance for scanning D source files

SCons.Scanner.Dir module

`SCons.Scanner.Dir.DirEntryScanner` (**kw)

Return a prototype Scanner instance for “scanning” directory Nodes for their in-memory entries

`SCons.Scanner.Dir.DirScanner` (**kw)

Return a prototype Scanner instance for scanning directories for on-disk files

`SCons.Scanner.Dir.do_not_scan` (k)

`SCons.Scanner.Dir.only_dirs` (nodes)

`SCons.Scanner.Dir.scan_in_memory` (node, env, path=())

“Scans” a Node.FS.Dir for its in-memory entries.

`SCons.Scanner.Dir.scan_on_disk` (node, env, path=())

Scans a directory for on-disk files and directories therein.

Looking up the entries will add these to the in-memory Node tree representation of the file system, so all we have to do is just that and then call the in-memory scanning function.

SCons.Scanner.Fortran module

`SCons.Scanner.Fortran`

This module implements the dependency scanner for Fortran code.

`class SCons.Scanner.Fortran.F90Scanner` (name, suffixes, path_variable, use_regex, incl_regex, def_regex, *args, **kw)

Bases: `SCons.Scanner.Classic`

A Classic Scanner subclass for Fortran source files which takes into account both USE and INCLUDE statements. This scanner will work for both F77 and F90 (and beyond) compilers.

Currently, this scanner assumes that the include files do not contain USE statements. To enable the ability to deal with USE statements in include files, add logic right after the module names are found to loop over each include file, search for and locate each USE statement, and append each module name to the list of dependencies. Caching the search results in a common dictionary somewhere so that the same include file is not searched multiple times would be a smart thing to do.

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

find_include (include, source_dir, path)

find_include_names (node)

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

scan (node, env, path=())

select (node)

sort_key (include)

SCons.Scanner.Fortran.**FortranScan** (path_variable='FORTRANPATH')

Return a prototype Scanner instance for scanning source files for Fortran USE & INCLUDE statements

SCons.Scanner.IDL module

SCons.Scanner.IDL

This module implements the dependency scanner for IDL (Interface Definition Language) files.

SCons.Scanner.IDL.**IDLScan** ()

Return a prototype Scanner instance for scanning IDL source files

SCons.Scanner.LaTeX module

SCons.Scanner.LaTeX

This module implements the dependency scanner for LaTeX code.

class SCons.Scanner.LaTeX.**FindENVPATHDirs** (variable)

Bases: **object**

A class to bind a specific E{*}PATH variable name to a function that will return all of the E{*}path directories.

class SCons.Scanner.LaTeX.**LaTeX** (name, suffixes, graphics_extensions, *args, **kw)

Bases: **SCons.Scanner.Base**

Class for scanning LaTeX files for included files.

Unlike most scanners, which use regular expressions that just return the included file name, this returns a tuple consisting of the keyword for the inclusion (“include”, “includegraphics”, “input”, or “bibliography”), and then the file name itself. Based on a quick look at LaTeX documentation, it seems that we should append .tex suffix for the “include” keywords, append .tex if there is no extension for the “input” keyword, and need to add .bib for the “bibliography” keyword that does not accept extensions by itself.

Finally, if there is no extension for an “includegraphics” keyword latex will append .ps or .eps to find the file, while pdftex may use .pdf, .jpg, .tif, .mps, or .png.

The actual subset and search order may be altered by DeclareGraphicsExtensions command. This complication is ignored. The default order corresponds to experimentation with teTeX:

```
$ latex --version
pdfTeX 3.141592-1.21a-2.2 (Web2C 7.5.4)
kpathsea version 3.5.4
```

The order is:

['.eps', '.ps'] for latex ['.png', '.pdf', '.jpg', '.tif'].

Another difference is that the search path is determined by the type of the file being searched: env[‘TEXINPUTS’] for “input” and “include” keywords env[‘TEXINPUTS’] for “includegraphics” keyword env[‘TEXINPUTS’] for “lstinutlisting” keyword env[‘BIBINPUTS’] for “bibliography” keyword env[‘BSTINPUTS’] for “bibliographystyle” keyword env[‘INDEXSTYLE’] for “makeindex” keyword, no scanning support needed just allows user to set it if needed.

FIXME: also look for the class or style in document[class|style]{ } FIXME: also look for the argument of bibliographystyle{ }

_latex_names (include_type, filename)

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

canonical_text (text)

Standardize an input TeX-file contents.

Currently:

- removes comments, unwrapping comment-wrapped lines.

```
env_variables = ['TEXINPUTS', 'BIBINPUTS', 'BSTINPUTS', 'INDEXSTYLE']
```

```
find_include(include, source_dir, path)
```

```
get_skeys(env=None)
```

```
keyword_paths = {'addbibresource': 'BIBINPUTS', 'addglobalbib': 'BIBINPUTS', 'addsectionbib': 'BIBINPUTS',
'bibliography': 'BIBINPUTS', 'bibliographystyle': 'BSTINPUTS', 'include': 'TEXINPUTS', 'includegraphics':
'TEXINPUTS', 'input': 'TEXINPUTS', 'lstininputlisting': 'TEXINPUTS', 'makeindex': 'INDEXSTYLE', 'usepackage':
'TEXINPUTS'}
```

```
path(env, dir=None, target=None, source=None)
```

```
scan(node, subdir='.')
```

```
scan_recurse(node, path=())
```

do a recursive scan of the top level target file This lets us search for included files based on the directory of the main file just as latex does

```
select(node)
```

```
sort_key(include)
```

```
two_arg_commands = ['import', 'subimport', 'includefrom', 'subincludefrom', 'inputfrom', 'subinputfrom']
```

```
SCons.Scanner.LaTeX.LaTeXScanner()
```

Return a prototype Scanner instance for scanning LaTeX source files when built with latex.

```
SCons.Scanner.LaTeX.PDFLaTeXScanner()
```

Return a prototype Scanner instance for scanning LaTeX source files when built with pdflatex.

```
class SCons.Scanner.LaTeX._Null
```

Bases: **object**

```
SCons.Scanner.LaTeX._null
```

alias of **SCons.Scanner.LaTeX._Null**

```
SCons.Scanner.LaTeX.modify_env_var(env, var, abspath)
```

SCons.Scanner.Prog module

```
SCons.Scanner.Prog.ProgramScanner(**kw)
```

Return a prototype Scanner instance for scanning executable files for static-lib dependencies

```
SCons.Scanner.Prog._subst_libs(env, libs)
```

Substitute environment variables and split into list.

```
SCons.Scanner.Prog.scan(node, env, libpath=())
```

This scanner scans program files for static-library dependencies. It will search the LIBPATH environment variable for libraries specified in the LIBS variable, returning any files it finds as dependencies.

SCons.Scanner.RC module

```
SCons.Scanner.RC
```

This module implements the dependency scanner for RC (Interface Definition Language) files.

```
SCons.Scanner.RC.RCScan()
```

Return a prototype Scanner instance for scanning RC source files

`SCons.Scanner.RC.no_tlb` (nodes)
 Filter out .tlb files as they are binary and shouldn't be scanned

SCons.Scanner.SWIG module

`SCons.Scanner.SWIG`

This module implements the dependency scanner for SWIG code.

`SCons.Scanner.SWIG.SWIGScanner` ()

Module contents

`SCons.Scanner`

The Scanner package for the SCons software construction utility.

```
class SCons.Scanner.Base (function, name='NONE', argument=<class 'SCons.Scanner._Null'>,
skeys=<class 'SCons.Scanner._Null'>, path_function=None, node_class=<class
'SCons.Node.FS.Base'>, node_factory=None, scan_check=None, recursive=None)
```

Bases: **object**

The base class for dependency scanners. This implements straightforward, single-pass scanning of a single file.

`_recurse_all_nodes` (nodes)

`_recurse_no_nodes` (nodes)

`add_scanner` (skey, scanner)

`add_skey` (skey)

Add a skey to the list of skeys

`get_skeys` (env=None)

`path` (env, dir=None, target=None, source=None)

`select` (node)

```
class SCons.Scanner.Classic (name, suffixes, path_variable, regex, *args, **kw)
```

Bases: **SCons.Scanner.Current**

A Scanner subclass to contain the common logic for classic CPP-style include scanning, but which can be customized to use different regular expressions to find the includes.

Note that in order for this to work “out of the box” (without overriding the `find_include()` and `sort_key()` methods), the regular expression passed to the constructor must return the name of the include file in group 0.

`_recurse_all_nodes` (nodes)

`_recurse_no_nodes` (nodes)

`add_scanner` (skey, scanner)

`add_skey` (skey)

Add a skey to the list of skeys

`find_include` (include, source_dir, path)

`find_include_names` (node)

`get_skeys` (env=None)

`path` (env, dir=None, target=None, source=None)

scan (node, path=())

select (node)

sort_key (include)

class SCons.Scanner.**ClassicCPP** (name, suffixes, path_variable, regex, *args, **kw)

Bases: SCons.Scanner.**Classic**

A Classic Scanner subclass which takes into account the type of bracketing used to include the file, and uses classic CPP rules for searching for the files based on the bracketing.

Note that in order for this to work, the regular expression passed to the constructor must return the leading bracket in group 0, and the contained filename in group 1.

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

find_include (include, source_dir, path)

find_include_names (node)

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

scan (node, path=())

select (node)

sort_key (include)

class SCons.Scanner.**Current** (*args, **kw)

Bases: SCons.Scanner.**Base**

A class for scanning files that are source files (have no builder) or are derived files and are current (which implies that they exist, either locally or in a repository).

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

select (node)

class SCons.Scanner.**FindPathDirs** (variable)

Bases: **object**

A class to bind a specific E{*}PATH variable name to a function that will return all of the E{*}path directories.

SCons.Scanner.**Scanner** (function, *args, **kw)

Public interface factory function for creating different types of Scanners based on the different types of “functions” that may be supplied.

TODO: Deprecate this some day. We’ve moved the functionality inside the Base class and really don’t need this factory function any more. It was, however, used by some of our Tool modules, so the call probably ended up in various people’s custom modules patterned on SCons code.

```
class SCons.Scanner.Selector (dict, *args, **kw)
```

Bases: **SCons.Scanner.Base**

A class for selecting a more specific scanner based on the scanner_key() (suffix) for a specific Node.

TODO: This functionality has been moved into the inner workings of the Base class, and this class will be deprecated at some point. (It was never exposed directly as part of the public interface, although it is used by the Scanner() factory function that was used by various Tool modules and therefore was likely a template for custom modules that may be out there.)

```
_recurse_all_nodes (nodes)
```

```
_recurse_no_nodes (nodes)
```

```
add_scanner (skey, scanner)
```

```
add_skey (skey)
```

Add a key to the list of skeys

```
get_skeys (env=None)
```

```
path (env, dir=None, target=None, source=None)
```

```
select (node)
```

```
class SCons.Scanner._Null
```

Bases: **object**

```
SCons.Scanner._null
```

alias of **SCons.Scanner._Null**

SCons.Script package

Submodules

SCons.Script.Interactive module

SCons interactive mode

```
class SCons.Script.Interactive.SConsInteractiveCmd (**kw)
```

Bases: **cmd.Cmd**

build [TARGETS] Build the specified TARGETS and their dependencies. ‘b’ is a synonym. clean [TARGETS] Clean (remove) the specified TARGETS and their dependencies. ‘c’ is a synonym. exit Exit SCons interactive mode. help [COMMAND] Prints help for the specified COMMAND. ‘h’ and ‘?’ are synonyms. shell [COMMANDLINE] Execute COMMANDLINE in a subshell. ‘sh’ and ‘!’ are synonyms. version Prints SCons version information.

```
_do_one_help (arg)
```

```
_doc_to_help (obj)
```

```
_strip_initial_spaces (s)
```

```
cmdloop (intro=None)
```

Repeatedly issue a prompt, accept input, parse an initial prefix off the received input, and dispatch to action methods, passing them the remainder of the line as argument.

columnize (list, displaywidth=80)

Display a list of strings as a compact set of columns.

Each column is only as wide as necessary. Columns are separated by two spaces (one was not legible enough).

complete (text, state)

Return the next possible completion for 'text'.

If a command has not been entered, then complete against command list. Otherwise try to call complete_<command> to get list of completions.

complete_help (*args)

completedefault (*ignored)

Method called to complete an input line when no command-specific complete_*() method is available.

By default, it returns an empty list.

completenames (text, *ignored)

default (argv)

Called on an input line when the command prefix is not recognized.

If this method is not overridden, it prints an error message and returns.

do_EOF (argv)

do_build (argv)

build [TARGETS] Build the specified TARGETS and their dependencies. 'b' is a synonym.

do_clean (argv)

clean [TARGETS] Clean (remove) the specified TARGETS and their dependencies. 'c' is a synonym.

do_exit (argv)

exit Exit SCons interactive mode.

do_help (argv)

help [COMMAND] Prints help for the specified COMMAND. 'h' and '?' are synonyms.

do_shell (argv)

shell [COMMANDLINE] Execute COMMANDLINE in a subshell. 'sh' and '!' are synonyms.

do_version (argv)

version Prints SCons version information.

doc_header = *'Documented commands (type help <topic>):'*

doc_leader = ""

emptyline ()

Called when an empty line is entered in response to the prompt.

If this method is not overridden, it repeats the last nonempty command entered.

get_names ()

identchars = *'abcdefghijklmnopqrstuvwxyABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789_'*

intro = *None*

lastcmd = ""

misc_header = *'Miscellaneous help topics:'*

nohelp = ***** No help on %s'*

onecmd (line)

Interpret the argument as though it had been typed in response to the prompt.

This may be overridden, but should not normally need to be; see the `precmd()` and `postcmd()` methods for useful execution hooks. The return value is a flag indicating whether interpretation of commands by the interpreter should stop.

parseline (line)

Parse the line into a command name and a string containing the arguments. Returns a tuple containing (command, args, line). 'command' and 'args' may be None if the line couldn't be parsed.

postcmd (stop, line)

Hook method executed just after a command dispatch is finished.

postloop ()

Hook method executed once when the `cmdloop()` method is about to return.

precmd (line)

Hook method executed just before the command line is interpreted, but after the input prompt is generated and issued.

preloop ()

Hook method executed once when the `cmdloop()` method is called.

print_topics (header, cmds, cmdlen, maxcol)

`prompt = '(Cmd) '`

`ruler = '='`

`synonyms = {'b': 'build', 'c': 'clean', 'h': 'help', 'scons': 'build', 'sh': 'shell'}`

`undoc_header = 'Undocumented commands:'`

`use_rawinput = 1`

`SCons.Script.Interactive.interact (fs, parser, options, targets, target_top)`

SCons.Script.Main module

`SCons.Script`

This file implements the `main()` function used by the `scons` script.

Architecturally, this *is* the `scons` script, and will likely only be called from the external “`scons`” wrapper. Consequently, anything here should not be, or be considered, part of the build engine. If it's something that we expect other software to want to use, it should go in some other module. If it's specific to the “`scons`” script invocation, it goes here.

`SCons.Script.Main.AddOption (*args, **kw)`

`class SCons.Script.Main.BuildTask (tm, targets, top, node)`

Bases: `SCons.Taskmaster.OutOfDateTask`

An SCons build task.

`_abc_impl = <_abc_data object>`

`_exception_raise ()`

Raises a pending exception that was recorded while getting a Task ready for execution.

`_no_exception_to_raise ()`

`display (message)`

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

do_failed (status=2)

exc_clear ()

Clears any recorded exception.

This also changes the "exception_raise" attribute to point to the appropriate do-nothing method.

exc_info ()

Returns info about a recorded exception.

exception_set (exception=None)

Records an exception to be raised at the appropriate time.

This also changes the "exception_raise" attribute to point to the method that will, in fact

execute ()

Called to execute the task.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in prepare(), executed() or failed().

executed ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call "visited()", which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call "visited()", which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn't want to call the Node's callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Make a task ready for execution

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what’s necessary.

needs_execute ()

Returns True (indicating this Task should be executed) if this Task’s target state indicates it needs executing, which has already been determined by an earlier up-to-date check.

postprocess ()

Post-processes a task after it’s been executed.

This examines all the targets just built (or not, we don’t care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

trace_message (method, node, description='node')

```
class SCons.Script.Main.CleanTask (tm, targets, top, node)
```

Bases: **SCons.Taskmaster.AlwaysTask**

An SCons clean task.

```
_abc_impl = <_abc_data object>
```

```
_clean_targets (remove=True)
```

```
_exception_raise ()
```

Raises a pending exception that was recorded while getting a Task ready for execution.

```
_get_files_to_clean ()
```

```
_no_exception_to_raise ()
```

```
display (message)
```

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

```
exc_clear ()
```

Clears any recorded exception.

This also changes the “exception_raise” attribute to point to the appropriate do-nothing method.

```
exc_info ()
```

Returns info about a recorded exception.

```
exception_set (exception=None)
```

Records an exception to be raised at the appropriate time.

This also changes the “exception_raise” attribute to point to the method that will, in fact

execute ()

executed ()

Called when the task has been successfully executed and the Taskmaster instance doesn't want to call the Node's callback methods.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn't want to call the Node's callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fs_delete (path, pathstr, remove=True)

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

needs_execute ()

Always returns True (indicating this Task should always be executed).

Subclasses that need this behavior (as opposed to the default of only executing Nodes that are out of date w.r.t. their dependencies) can use this as follows:

class MyTaskSubclass(SCons.Taskmaster.Task):

needs_execute = SCons.Taskmaster.AlwaysTask.needs_execute

postprocess ()

Post-processes a task after it's been executed.

This examines all the targets just built (or not, we don't care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

remove ()**show ()**

trace_message (method, node, description='node')

class SCons.Script.Main.CountStats

Bases: **SCons.Script.Main.Stats**

do_append (label)

do_nothing (*args, **kw)

do_print ()

enable (outfp)

class SCons.Script.Main.FakeOptionParser

Bases: **object**

A do-nothing option parser, used for the initial OptionsParser variable.

During normal SCons operation, the OptionsParser is created right away by the main() function. Certain tests scripts however, can introspect on different Tool modules, the initialization of which can try to add a new, local option to an otherwise uninitialized OptionsParser object. This allows that introspection to happen without blowing up.

class FakeOptionValues

Bases: **object**

add_local_option (*args, **kw)

values = <SCons.Script.Main.FakeOptionParser.FakeOptionValues object>

SCons.Script.Main.**GetBuildFailures** ()

SCons.Script.Main.**GetOption** (name)

class SCons.Script.Main.MemStats

Bases: **SCons.Script.Main.Stats**

do_append (label)

do_nothing (*args, **kw)

do_print ()

enable (outfp)

SCons.Script.Main.**PrintHelp** (file=None)

```
SCons.Script.Main.Progress (*args, **kw)
```

```
class SCons.Script.Main.Progressor (obj, interval=1, file=None, overwrite=False)
```

```
Bases: object
```

```
count = 0
```

```
erase_previous ()
```

```
prev = "
```

```
replace_string (node)
```

```
spinner (node)
```

```
string (node)
```

```
target_string = '$TARGET'
```

```
write (s)
```

```
class SCons.Script.Main.QuestionTask (tm, targets, top, node)
```

```
Bases: SCons.Taskmaster.AlwaysTask
```

```
An SCons task for the -q (question) option.
```

```
_abc_impl = <_abc_data object>
```

```
_exception_raise ()
```

```
Raises a pending exception that was recorded while getting a Task ready for execution.
```

```
_no_exception_to_raise ()
```

```
display (message)
```

```
Hook to allow the calling interface to display a message.
```

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

```
exc_clear ()
```

```
Clears any recorded exception.
```

This also changes the "exception_raise" attribute to point to the appropriate do-nothing method.

```
exc_info ()
```

```
Returns info about a recorded exception.
```

```
exception_set (exception=None)
```

```
Records an exception to be raised at the appropriate time.
```

This also changes the "exception_raise" attribute to point to the method that will, in fact

```
execute ()
```

```
Called to execute the task.
```

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in prepare(), executed() or failed().

```
executed ()
```

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call

“visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn’t want to call the Node’s callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what’s necessary.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what’s necessary.

needs_execute ()

Always returns True (indicating this Task should always be executed).

Subclasses that need this behavior (as opposed to the default of only executing Nodes that are out of date w.r.t. their dependencies) can use this as follows:

```
class MyTaskSubclass(SCons.Taskmaster.Task):
```

```
    needs_execute = SCons.Taskmaster.AlwaysTask.needs_execute
```

postprocess ()

Post-processes a task after it’s been executed.

This examines all the targets just built (or not, we don’t care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

trace_message (method, node, description='node')

exception SCons.Script.Main.SConsPrintHelpException

Bases: **Exception**

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

SCons.Script.Main.**SetOption** (name, value)

class SCons.Script.Main.**Stats**

Bases: **object**

do_nothing (*args, **kw)

enable (outfp)

class SCons.Script.Main.**TreePrinter** (derived=False, prune=False, status=False, sLineDraw=False)

Bases: **object**

display (t)

get_all_children (node)

get_derived_children (node)

SCons.Script.Main.**_SConstruct_exists** (dirname='', repositories=[], filelist=None)

This function checks that an SConstruct file exists in a directory. If so, it returns the path of the file. By default, it checks the current directory.

SCons.Script.Main.**_build_targets** (fs, options, targets, target_top)

SCons.Script.Main.**_create_path** (plist)

SCons.Script.Main.**_exec_main** (parser, values)

SCons.Script.Main.**_load_all_site_scons_dirs** (topdir, verbose=None)

Load all of the predefined site_scons dir. Order is significant; we load them in order from most generic (machine-wide) to most specific (topdir). The verbose argument is only for testing.

SCons.Script.Main.**_load_site_scons_dir** (topdir, site_dir_name=None)

Load the site directory under topdir.

If a site dir name is supplied use it, else use default “site_scons” Prepend site dir to sys.path. If a “site_tools” subdir exists, prepend to toolpath. Import “site_init.py” from site dir if it exists.

SCons.Script.Main.**_main** (parser)

SCons.Script.Main.**_scons_internal_error** ()

Handle all errors but user errors. Print out a message telling the user what to do in this case and print a normal trace.

SCons.Script.Main.**_scons_internal_warning** (e)

Slightly different from `_scons_user_warning` in that we use the *current call stack* rather than `sys.exc_info()` to get our stack trace. This is used by the warnings framework to print warnings.

SCons.Script.Main.**_scons_syntax_error** (e)

Handle syntax errors. Print out a message and show where the error occurred.

SCons.Script.Main.**_scons_user_error** (e)

Handle user errors. Print out a message and a description of the error, along with the line number and routine where it occurred. The file and line number will be the deepest stack frame that is not part of SCons itself.

`SCons.Script.Main._scons_user_warning (e)`

Handle user warnings. Print out a message and a description of the warning, along with the line number and routine where it occurred. The file and line number will be the deepest stack frame that is not part of SCons itself.

`SCons.Script.Main._set_debug_values (options)`

`SCons.Script.Main.fetch_win32_parallel_msg ()`

`SCons.Script.Main.find_deepest_user_frame (tb)`

Find the deepest stack frame that is not part of SCons.

Input is a “pre-processed” stack trace in the form returned by `traceback.extract_tb()` or `traceback.extract_stack()`

`SCons.Script.Main.main ()`

`SCons.Script.Main.path_string (label, module)`

`SCons.Script.Main.python_version_deprecated (version=sys.version_info(major=3, minor=7, micro=8, releaselevel='final', serial=0))`

`SCons.Script.Main.python_version_string ()`

`SCons.Script.Main.python_version_unsupported (version=sys.version_info(major=3, minor=7, micro=8, releaselevel='final', serial=0))`

`SCons.Script.Main.revert_io ()`

`SCons.Script.Main.test_load_all_site_scons_dirs (d)`

`SCons.Script.Main.version_string (label, module)`

SCons.Script.SConsOptions module

`SCons.Script.SConsOptions.Parser (version)`

Returns an options parser object initialized with the standard SCons options.

`class SCons.Script.SConsOptions.SConsIndentedHelpFormatter (indent_increment=2, max_help_position=24, width=None, short_first=1)`

Bases: `optparse.IndentedHelpFormatter`

`NO_DEFAULT_VALUE = 'none'`

`_format_text (text)`

Format a paragraph of free-form text for inclusion in the help output at the current indentation level.

`dedent ()`

`expand_default (option)`

`format_description (description)`

`format_epilog (epilog)`

`format_heading (heading)`

This translates any heading of “options” or “Options” into “SCons Options.” Unfortunately, we have to do this here, because those titles are hard-coded in the `optparse` calls.

`format_option (option)`

A copy of the normal `optparse.IndentedHelpFormatter.format_option()` method. This has been snarfed so we can modify text wrapping to out liking:

- **add our own regular expression that doesn't break on hyphens**
(so things like `–no-print-directory` don't get broken);
- **wrap the list of options themselves when it's too long**

(the `wrapper.fill(opts)` call below);
 – set the `subsequent_indent` when wrapping the `help_text`.

format_option_strings (*option*)
 Return a comma-separated list of option strings & metavariables.

format_usage (*usage*)

indent ()

set_long_opt_delimiter (*delim*)

set_parser (*parser*)

set_short_opt_delimiter (*delim*)

store_option_strings (*parser*)

class `SCons.Script.SConsOptions.SConsOption` (**opts*, ***attrs*)

Bases: `optparse.Option`

ACTIONS = ('store', 'store_const', 'store_true', 'store_false', 'append', 'append_const', 'count', 'callback', 'help', 'version')

ALWAYS_TYPED_ACTIONS = ('store', 'append')

ATTRS = ['action', 'type', 'dest', 'default', 'nargs', 'const', 'choices', 'callback', 'callback_args', 'callback_kwargs', 'help', 'metavar']

CHECK_METHODS = [*<function Option._check_action>*, *<function Option._check_type>*, *<function Option._check_choice>*, *<function Option._check_dest>*, *<function Option._check_const>*, *<function Option._check_nargs>*, *<function Option._check_callback>*, *<function SConsOption._check_nargs_optional>*]

CONST_ACTIONS = ('store_const', 'append_const', 'store', 'append', 'callback')

STORE_ACTIONS = ('store', 'store_const', 'store_true', 'store_false', 'append', 'append_const', 'count')

TYPED_ACTIONS = ('store', 'append', 'callback')

TYPES = ('string', 'int', 'long', 'float', 'complex', 'choice')

TYPE_CHECKER = {'choice': *<function check_choice>*, 'complex': *<function check_builtin>*, 'float': *<function check_builtin>*, 'int': *<function check_builtin>*, 'long': *<function check_builtin>*}

_check_action ()

_check_callback ()

_check_choice ()

_check_const ()

_check_dest ()

_check_nargs ()

_check_nargs_optional ()

_check_opt_strings (*opts*)

```

_check_type ()
_set_attrs (attrs)
_set_opt_strings (opts)
check_value (opt, value)
convert_value (opt, value)
get_opt_string ()
process (opt, value, values, parser)
take_action (action, dest, opt, value, values, parser)
takes_value ()

```

```
class SCons.Script.SConsOptions.SConsOptionGroup (parser, title, description=None)
```

```
Bases: optparse.OptionGroup
```

A subclass for SCons-specific option groups.

The only difference between this and the base class is that we print the group's help text flush left, underneath their own title but lined up with the normal "SCons Options".

```

_check_conflict (option)
_create_option_list ()
_create_option_mappings ()
_share_option_mappings (parser)
add_option (Option)
    add_option(opt_str, ..., kwarg=val, ...)
add_options (option_list)
destroy ()
    see OptionParser.destroy().
format_description (formatter)
format_help (formatter)
    Format an option group's help text, outdenting the title so it's flush with the "SCons Options" title we print at the top.
format_option_help (formatter)
get_description ()
get_option (opt_str)
has_option (opt_str)
remove_option (opt_str)
set_conflict_handler (handler)
set_description (description)
set_title (title)

```

```
class SCons.Script.SConsOptions.SConsOptionParser (usage=None, option_list=None,
option_class=<class 'optparse.Option'>, version=None, conflict_handler='error',
description=None, formatter=None, add_help_option=True, prog=None, epilog=None)
```

Bases: `optparse.OptionParser`

`_add_help_option ()`

`_add_version_option ()`

`_check_conflict (option)`

`_create_option_list ()`

`_create_option_mappings ()`

`_get_all_options ()`

`_get_args (args)`

`_init_parsing_state ()`

`_match_long_opt (opt : string) → string`

Determine which long option string 'opt' matches, ie. which one it is an unambiguous abbreviation for. Raises `BadOptionError` if 'opt' doesn't unambiguously match any long option string.

`_populate_option_list (option_list, add_help=True)`

`_process_args (largs, rargs, values)`

`_process_args(largs : [string],`

`rargs : [string], values : Values)`

Process command-line arguments and populate 'values', consuming options and arguments from 'rargs'. If 'allow_interspersed_args' is false, stop at the first non-option argument. If true, accumulate any interspersed non-option arguments in 'largs'.

`_process_long_opt (rargs, values)`

SCons-specific processing of long options.

This is copied directly from the normal `optparse._process_long_opt()` method, except that, if configured to do so, we catch the exception thrown when an unknown option is encountered and just stick it back on the "leftover" arguments for later (re-)processing.

`_process_short_opts (rargs, values)`

`_share_option_mappings (parser)`

`add_local_option (*args, **kw)`

Adds a local option to the parser.

This is initiated by a `SetOption()` call to add a user-defined command-line option. We add the option to a separate option group for the local options, creating the group if necessary.

`add_option (Option)`

`add_option(opt_str, ..., kwarg=val, ...)`

`add_option_group (*args, **kwargs)`

`add_options (option_list)`

`check_values (values : Values, args : [string])`

`-> (values : Values, args : [string])`

Check that the supplied option values and leftover arguments are valid. Returns the option values and leftover arguments (possibly adjusted, possibly completely new – whatever you like). Default implementation just returns the passed-in values; subclasses may override as desired.

destroy ()

Declare that you are done with this OptionParser. This cleans up reference cycles so the OptionParser (and all objects referenced by it) can be garbage-collected promptly. After calling `destroy()`, the OptionParser is unusable.

disable_interspersed_args ()

Set parsing to stop on the first non-option. Use this if you have a command processor which runs another command that has options of its own and you want to make sure these options don't get confused.

enable_interspersed_args ()

Set parsing to not stop on the first non-option, allowing interspersing switches with command arguments. This is the default behavior. See also `disable_interspersed_args()` and the class documentation description of the attribute `allow_interspersed_args`.

error (msg : string)

Print a usage message incorporating 'msg' to stderr and exit. If you override this in a subclass, it should not return – it should either exit or raise an exception.

exit (status=0, msg=None)

expand_prog_name (s)

format_description (formatter)

format_epilog (formatter)

format_help (formatter=None)

format_option_help (formatter=None)

get_default_values ()

get_description ()

get_option (opt_str)

get_option_group (opt_str)

get_prog_name ()

get_usage ()

get_version ()

has_option (opt_str)

parse_args (args=None, values=None)

parse_args(args : [string] = sys.argv[1:],

values : Values = None)

-> (values : Values, args : [string])

Parse the command-line options found in 'args' (default: `sys.argv[1:]`). Any errors result in a call to 'error()', which by default prints the usage message to stderr and calls `sys.exit()` with an error message. On success returns a pair (values, args) where 'values' is a Values instance (with all your option values) and 'args' is the list of arguments left over after parsing options.

preserve_unknown_options = False

print_help(file : file = stdout)

Print an extended help message, listing all options and any help text provided with them, to 'file' (default stdout).

print_usage(file : file = stdout)

Print the usage message for the current program (self.usage) to 'file' (default stdout). Any occurrence of the string "%prog" in self.usage is replaced with the name of the current program (basename of sys.argv[0]). Does nothing if self.usage is empty or not defined.

print_version(file : file = stdout)

Print the version message for this program (self.version) to 'file' (default stdout). As with print_usage(), any occurrence of "%prog" in self.version is replaced by the current program's name. Does nothing if self.version is empty or undefined.

remove_option(opt_str)

reparse_local_options()

Re-parse the leftover command-line options.

Parse options stored in *self.largs*, so that any value overridden on the command line is immediately available if the user turns around and does a **GetOption()** right away.

We mimic the processing of the single args in the original OptionParser **_process_args()**, but here we allow exact matches for long-opts only (no partial argument names!). Otherwise there could be problems in **add_local_option()** below. When called from there, we try to reparse the command-line arguments that

1. haven't been processed so far (*self.largs*), but

2. are possibly not added to the list of options yet.

So, when we only have a value for "--myargument" so far, a command-line argument of "--myarg=test" would set it, per the behaviour of **_match_long_opt()**, which allows for partial matches of the option name, as long as the common prefix appears to be unique. This would lead to further confusion, because we might want to add another option "--myarg" later on (see issue #2929).

set_conflict_handler(handler)

set_default(dest, value)

set_defaults(**kwargs)

set_description(description)

set_process_default_values(process)

set_usage(usage)

standard_option_list = []

class SCons.Script.SConsOptions.SConsValues (defaults)

Bases: **optparse.Values**

Holder class for uniform access to SCons options, regardless of whether or not they can be set on the command line or in the SConscript files (using the SetOption() function).

A SCons option value can originate three different ways:

1. set on the command line;

2. set in an SConscript file;

3. the default setting (from the the op.add_option() calls in the Parser() function, below).

The command line always overrides a value set in a SConscript file, which in turn always overrides default settings. Because we want to support user-specified options in the SConscript file itself, though, we may not know about all of the options when the command line is first parsed, so we can't make all the necessary precedence decisions at the time the option is configured.

The solution implemented in this class is to keep these different sets of settings separate (command line, SConscript file, and default) and to override the **__getattr__()** method to check them in turn. This should allow the

rest of the code to just fetch values as attributes of an instance of this class, without having to worry about where they came from.

Note that not all command line options are settable from SConscript files, and the ones that are must be explicitly added to the “settable” list in this class, and optionally validated and coerced in the `set_option()` method.

`_update (dict, mode)`

`_update_careful (dict)`

Update the option values from an arbitrary dictionary, but only use keys from dict that already have a corresponding attribute in self. Any keys in dict without a corresponding attribute are silently ignored.

`_update_loose (dict)`

Update the option values from an arbitrary dictionary, using all keys from the dictionary regardless of whether they have a corresponding attribute in self or not.

`ensure_value (attr, value)`

`read_file (filename, mode='careful')`

`read_module (modname, mode='careful')`

`set_option (name, value)`

Sets an option from an SConscript file.

`settable = ['clean', 'diskcheck', 'duplicate', 'help', 'implicit_cache', 'max_drift', 'md5_chunksize', 'no_exec', 'num_jobs', 'random', 'stack_size', 'warn', 'silent', 'no_progress']`

`SCons.Script.SConsOptions.diskcheck_convert (value)`

SCons.Script.SConscript module

`SCons.Script.SConscript`

This module defines the Python API provided to SConscript and SConstruct files.

`SCons.Script.SConscript.BuildDefaultGlobals ()`

Create a dictionary containing all the default globals for SConstruct and SConscript files.

`SCons.Script.SConscript.Configure (*args, **kw)`

`class SCons.Script.SConscript.DefaultEnvironmentCall (method_name, subst=0)`

Bases: `object`

A class that implements “global function” calls of Environment methods by fetching the specified method from the DefaultEnvironment’s class. Note that this uses an intermediate proxy class instead of calling the DefaultEnvironment method directly so that the proxy can override the `subst()` method and thereby prevent expansion of construction variables (since from the user’s point of view this was called as a global function, with no associated construction environment).

`class SCons.Script.SConscript.Frame (fs, exports, sconscript)`

Bases: `object`

A frame on the SConstruct/SConscript call stack

`SCons.Script.SConscript.Return (*vars, **kw)`

`class SCons.Script.SConscript.SConsEnvironment (platform=None, tools=None, toolpath=None, variables=None, parse_flags=None, **kw)`

Bases: `SCons.Environment.Base`

An Environment subclass that contains all of the methods that are particular to the wrapper SCons interface and which aren’t (or shouldn’t be) part of the build engine itself.

Note that not all of the methods of this class have corresponding global functions, there are some private methods.

`Action (*args, **kw)`

AddMethod (function, name=None)

Adds the specified function as a method of this construction environment with the specified name. If the name is omitted, the default name is the name of the function itself.

AddPostAction (files, action)**AddPreAction** (files, action)**Alias** (target, source=[], action=None, **kw)**AlwaysBuild** (*targets)**Append** (**kw)

Append values to existing construction variables in an Environment.

AppendENVPPath (name, newpath, envname='ENV', sep=':', delete_existing=0)

Append path elements to the path 'name' in the 'ENV' dictionary for this environment. Will only add any particular path once, and will normpath and normcase all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If delete_existing is 0, a newpath which is already in the path will not be moved to the end (it will be left where it is).

AppendUnique (delete_existing=0, **kw)

Append values to existing construction variables in an Environment, if they're not already there. If delete_existing is 1, removes existing values first, so values move to end.

Builder (**kw)**CacheDir** (path)**Clean** (targets, files)**Clone** (tools=[], toolpath=None, parse_flags=None, **kw)

Return a copy of a construction Environment.

The copy is like a Python "deep copy"—that is, independent copies are made recursively of each objects—except that a reference is copied when an object is not deep-copyable (like a function). There are no references to any mutable objects in the original Environment.

Command (target, source, action, **kw)

Builds the supplied target files from the supplied source files using the supplied action. Action may be any type that the Builder constructor will accept for an action.

Configure (*args, **kw)**Decider** (function)**Default** (*targets)**Depends** (target, dependency)

Explicitly specify that 'target's depend on 'dependency'.

Detect (progs)

Return the first available program from one or more possibilities.

Parameters: **progs** (*str or list*) – one or more command names to check for

Dictionary (*args)

Return construction variables from an environment.

Parameters: ***args** (*optional*) – variable names to look up

Returns: If *args* omitted, the dictionary of all construction variables. If one arg, the corresponding value is returned. If more than one arg, a list of values is returned.

Raises: **KeyError** – if any of *args* is not in the construction environment.

Dir (name, *args, **kw)

Dump (key=None, format='pretty')

Return construction variables serialized to a string.

Parameters:

- **key** (*optional*) – if None, format the whole dict of variables. Else format the value of *key* (Default value = None)
- **format** (*str, optional*) – specify the format to serialize to. “pretty” generates a pretty-printed string, “json” a JSON-formatted string. (Default value = “pretty”)

EnsurePythonVersion (major, minor)

Exit abnormally if the Python version is not late enough.

EnsureSConsVersion (major, minor, revision=0)

Exit abnormally if the SCons version is not late enough.

Entry (name, *args, **kw)

Environment (**kw)

Execute (action, *args, **kw)

Directly execute an action through an Environment

Exit (value=0)

Export (*vars, **kw)

File (name, *args, **kw)

FindFile (file, dirs)

FindInstalledFiles ()

returns the list of all targets of the Install and InstallAs Builder.

FindIdxes (paths, prefix, suffix)

Search a list of paths for something that matches the prefix and suffix.

Parameters:

- **paths** – the list of paths or nodes.
- **prefix** – construction variable for the prefix.
- **suffix** – construction variable for the suffix.

Returns: the matched path or None

FindSourceFiles (node='.'))

returns a list of all source files.

Flatten (sequence)

GetBuildPath (files)

GetLaunchDir ()

GetOption (name)

Glob (pattern, ondisk=True, source=False, strings=False, exclude=None)

Help (text, append=False)

Ignore (target, dependency)
Ignore a dependency.

Import (*vars)

Literal (string)

Local (*targets)

MergeFlags (args, unique=1, dict=None)

Merge the dict in args into the construction variables of this env, or the passed-in dict. If args is not a dict, it is converted into a dict using ParseFlags. If unique is not set, the flags are appended rather than merged.

NoCache (*targets)

Tags a target so that it will not be cached

NoClean (*targets)

Tags a target so that it will not be cleaned by -c

Override (overrides)

Produce a modified environment whose variables are overridden by the overrides dictionaries. "overrides" is a dictionary that will override the variables of this environment.

This function is much more efficient than Clone() or creating a new Environment because it doesn't copy the construction environment dictionary, it just wraps the underlying construction environment, and doesn't even create a wrapper object if there are no overrides.

ParseConfig (command, function=None, unique=1)

Use the specified function to parse the output of the command in order to modify the current environment. The 'command' can be a string or a list of strings representing a command and its arguments. 'Function' is an optional argument that takes the environment, the output of the command, and the unique flag. If no function is specified, MergeFlags, which treats the output as the result of a typical 'X-config' command (i.e. gtk-config), will merge the output into the appropriate variables.

ParseDepends (filename, must_exist=None, only_one=0)

Parse a mkdep-style file for explicit dependencies. This is completely abusable, and should be unnecessary in the "normal" case of proper SCons configuration, but it may help make the transition from a Make hierarchy easier for some people to swallow. It can also be genuinely useful when using a tool that can write a .d file, but for which writing a scanner would be too complicated.

ParseFlags (*flags)

Parse the set of flags and return a dict with the flags placed in the appropriate entry. The flags are treated as a typical set of command-line flags for a GNU-like toolchain and used to populate the entries in the dict immediately below. If one of the flag strings begins with a bang (exclamation mark), it is assumed to be a command and the rest of the string is executed; the result of that evaluation is then added to the dict.

Platform (platform)

Precious (*targets)

Prepend (**kw)

Prepend values to existing construction variables in an Environment.

PrependENVPath (name, newpath, envname='ENV', sep=':', delete_existing=1)

Prepend path elements to the path 'name' in the 'ENV' dictionary for this environment. Will only add any particular path once, and will normpath and normcase all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If delete_existing is 0, a newpath which is already in the path will not be moved to the front (it will be left where it is).

PrependUnique (*delete_existing=0, **kw*)

Prepend values to existing construction variables in an Environment, if they're not already there. If *delete_existing* is 1, removes existing values first, so values move to front.

Pseudo (**targets*)

PyPackageDir (*modulename*)

RemoveMethod (*function*)

Removes the specified function's MethodWrapper from the *added_methods* list, so we don't re-bind it when making a clone.

Replace (***kw*)

Replace existing construction variables in an Environment with new construction variables and/or values.

ReplaceIxes (*path, old_prefix, old_suffix, new_prefix, new_suffix*)

Replace *old_prefix* with *new_prefix* and *old_suffix* with *new_suffix*.

env - Environment used to interpolate variables. *path* - the path that will be modified. *old_prefix* - construction variable for the old prefix. *old_suffix* - construction variable for the old suffix. *new_prefix* - construction variable for the new prefix. *new_suffix* - construction variable for the new suffix.

Repository (**dirs, **kw*)

Requires (*target, prerequisite*)

Specify that 'prerequisite' must be built before 'target', (but 'target' does not actually depend on 'prerequisite' and need not be rebuilt if it changes).

SConscript (**ls, **kw*)

Execute SCons configuration files.

Parameters: **ls* (*str* or *list*) – configuration file(s) to execute.

Keyword

Arguments:

- **dirs** (*list*) – execute SConscript in each listed directory.
- **name** (*str*) – execute script 'name' (used only with 'dirs').
- **exports** (*list* or *dict*) – locally export variables the called script(s) can import.
- **variant_dir** (*str*) – mirror sources needed for the build in a variant directory to allow building in it.
- **duplicate** (*bool*) – physically duplicate sources instead of just adjusting paths of derived files (used only with 'variant_dir') (default is True).
- **must_exist** (*bool*) – fail if a requested script is missing (default is False, default is deprecated).

Returns: list of variables returned by the called script

Raises: **UserError** – a script is not found and such exceptions are enabled.

SConscriptChdir (*flag*)

SConsignFile (*name= '.sconsign', dbm_module=None*)

Scanner (**args, **kw*)

SetDefault (***kw*)

SetOption (*name, value*)

SideEffect (*side_effect, target*)

Tell scons that *side_effects* are built as side effects of building targets.

Split (*arg*)

This function converts a string or list into a list of strings or Nodes. This makes things easier for users by allowing files to be specified as a white-space separated list to be split.

The input rules are:

- A single string containing names separated by spaces. These will be split apart at the spaces.
 - A single Node instance
 - A list containing either strings or Node instances. Any strings in the list are not split at spaces.
- In all cases, the function returns a list of Nodes and strings.

Tool (tool, toolpath=None, **kw)

Value (value, built_value=None, name=None)

VariantDir (variant_dir, src_dir, duplicate=1)

WhereIs (prog, path=None, pathext=None, reject=[])
Find prog in the path.

_canonicalize (path)

_changed_build (dependency, target, prev_ni, repo_node=None)

_changed_content (dependency, target, prev_ni, repo_node=None)

_changed_source (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_match (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_newer (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_then_content (dependency, target, prev_ni, repo_node=None)

_copy2_from_cache (src, dst)

_copy_from_cache (src, dst)

_exceeds_version (major, minor, v_major, v_minor)
Return 1 if 'major' and 'minor' are greater than the version in 'v_major' and 'v_minor', and 0 otherwise.

_find_toolpath_dir (tp)

_get_SConscript_filenames (ls, kw)

Convert the parameters passed to SConscript() calls into a list of files and export variables. If the parameters are invalid, throws SCons.Errors.UserError. Returns a tuple (l, e) where l is a list of SConscript filenames and e is a list of exports.

_get_major_minor_revision (version_string)

Split a version string into major, minor and (optionally) revision parts.
This is complicated by the fact that a version string can be something like 3.2b1.

_gsm ()

_init_special ()

Initial the dispatch tables for special handling of special construction variables.

_update (other)

Private method to update an environment's consvar dict directly.
Bypasses the normal checks that occur when users try to set items.

_update_onlynew (*other*)

Private method to add new items to an environment's consvar dict.

Only adds items from *other* whose keys do not already appear in the existing dict; values from *other* are not used for replacement. Bypasses the normal checks that occur when users try to set items.

arg2nodes (*args*, *node_factory*=<class 'SCons.Environment._Null'>, *lookup_list*=<class 'SCons.Environment._Null'>, ***kw*)

backtick (*command*)**get** (*key*, *default*=None)

Emulates the `get()` method of dictionaries.

get_CacheDir ()**get_builder** (*name*)

Fetch the builder with the specified name from the environment.

get_factory (*factory*, *default*='File')

Return a factory function for creating Nodes for this construction environment.

get_scanner (*skey*)

Find the appropriate scanner given a key (usually a file suffix).

get_src_sig_type ()**get_tgt_sig_type** ()**gvars** ()**has_key** (*key*)

Emulates the `has_key()` method of dictionaries.

items ()

Emulates the `items()` method of dictionaries.

keys ()

Emulates the `keys()` method of dictionaries.

lvars ()**scanner_map_delete** (*kw*=None)

Delete the cached scanner map (if we need to).

subst (*string*, *raw*=0, *target*=None, *source*=None, *conv*=None, *executor*=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

subst_kw (*kw*, *raw*=0, *target*=None, *source*=None)**subst_list** (*string*, *raw*=0, *target*=None, *source*=None, *conv*=None, *executor*=None)

Calls through to `SCons.Subst.scons_subst_list()`. See the documentation for that function.

subst_path (*path*, *target*=None, *source*=None)

Substitute a path list, turning `EntryProxies` into `Nodes` and leaving `Nodes` (and other objects) as-is.

subst_target_source (*string*, *raw*=0, *target*=None, *source*=None, *conv*=None, *executor*=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial

underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

values ()

Emulates the values() method of dictionaries.

exception SCons.Script.SConscript.SConscriptReturn

Bases: **Exception**

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

SCons.Script.SConscript.SConscript_exception (file=<_io.TextIOWrapper name='<stderr>' mode='w' encoding='utf-8'>)

Print an exception stack trace just for the SConscript file(s). This will show users who have Python errors where the problem is, without cluttering the output with all of the internal calls leading up to where we exec the SConscript.

SCons.Script.SConscript._SConscript (fs, *files, **kw)

SCons.Script.SConscript.annotate (node)

Annotate a node with the stack frame describing the SConscript file and line number that created it.

SCons.Script.SConscript.compute_exports (exports)

Compute a dictionary of exports given one of the parameters to the Export() function or the exports argument to SConscript().

SCons.Script.SConscript.get_DefaultEnvironmentProxy ()

SCons.Script.SConscript.get_calling_namespaces ()

Return the locals and globals for the function that called into this module in the current call stack.

SCons.Script.SConscript.handle_missing_SConscript (f, must_exist=None)

Take appropriate action on missing file in SConscript() call.

Print a warning or raise an exception on missing file. On first warning, print a deprecation message.

Parameters:

- **f** (*str*) – path of missing configuration file
- **must_exist** (*bool*) – raise exception if file does not exist

Raises: **UserError** if 'must_exist' is True or if **global** – SCons.Script._no_missing_sconscript is True.

Module contents

SCons.Script

This file implements the main() function used by the sconscript script.

Architecturally, this *is* the sconscript script, and will likely only be called from the external “scons” wrapper. Consequently, anything here should not be, or be considered, part of the build engine. If it’s something that we expect other software to want to use, it should go in some other module. If it’s specific to the “scons” script invocation, it goes here.

SCons.Script.HelpFunction (text, append=False)

class SCons.Script.TargetList (initlist=None)

Bases: **collections.UserList**

_UserList__cast (other)

_abc_impl = <_abc_data object>

_add_Default (list)

_clear ()**_do_nothing (*args, **kw)****append (item)**

S.append(value) – append value to the end of the sequence

clear () → None -- remove all items from S**copy ()****count (value)** → integer -- return number of occurrences of value**extend (other)**

S.extend(iterable) – extend sequence by appending elements from the iterable

index (value[, start[, stop]]) → integer -- return first index of value.

Raises ValueError if the value is not present.

Supporting start and stop arguments is optional, but recommended.

insert (i, item)

S.insert(index, value) – insert value before index

pop ([, index]) → item -- remove and return item at index (default last).

Raise IndexError if list is empty or index is out of range.

remove (item)

S.remove(value) – remove first occurrence of value. Raise ValueError if the value is not present.

reverse ()S.reverse() – reverse *IN PLACE***sort (*args, **kws)**SCons.Script.**Variables** (files=None, args={})SCons.Script.**_Add_Arguments** (alist)SCons.Script.**_Add_Targets** (tlist)SCons.Script.**_Get_Default_Targets** (d, fs)SCons.Script.**_Set_Default_Targets** (env, tlist)SCons.Script.**_Set_Default_Targets_Has_Been_Called** (d, fs)SCons.Script.**_Set_Default_Targets_Has_Not_Been_Called** (d, fs)SCons.Script.**set_missing_sconscript_error** (flag=1)

Set behavior on missing file in SConscript() call. Returns previous value

SCons.Tool package

Module contents

SCons.Tool

SCons tool selection.

This looks for modules that define a callable object that can modify a construction environment as appropriate for a given tool (or tool chain).

Note that because this subsystem just *selects* a callable that can modify a construction environment, it's possible for people to define their own "tool specification" in an arbitrary callable function. No one needs to use or tie in to this subsystem in order to roll their own tool specifications.

`SCons.Tool.CreateJarBuilder` (*env*)

The Jar builder expects a list of class files which it can package into a jar file.

The jar tool provides an interface for passing other types of java files such as .java, directories or swig interfaces and will build them to class files in which it can package into the jar.

`SCons.Tool.CreateJavaClassDirBuilder` (*env*)

`SCons.Tool.CreateJavaClassFileBuilder` (*env*)

`SCons.Tool.CreateJavaFileBuilder` (*env*)

`SCons.Tool.CreateJavaHBuilder` (*env*)

`SCons.Tool.CreateLibSymlinks` (*env*, *symlinks*)

Physically creates symlinks. The *symlinks* argument must be a list in form [(*link*, *linktarget*), ...], where *link* and *linktarget* are SCons nodes.

`SCons.Tool.EmitLibSymlinks` (*env*, *symlinks*, *libnode*, ***kw*)

Used by emitters to handle (shared/versioned) library symlinks

`SCons.Tool.FindAllTools` (*tools*, *env*)

`SCons.Tool.FindTool` (*tools*, *env*)

`SCons.Tool.Initializers` (*env*)

`SCons.Tool.LibSymlinksActionFunction` (*target*, *source*, *env*)

`SCons.Tool.LibSymlinksStrFun` (*target*, *source*, *env*, **args*)

`SCons.Tool.StringizeLibSymlinks` (*symlinks*)

Converts list with pairs of nodes to list with pairs of node paths (strings). Used mainly for debugging.

`class SCons.Tool.Tool` (*name*, *toolpath=None*, ***kw*)

Bases: `object`

`_load_dotted_module_py2` (*short_name*, *full_name*, *searchpaths=None*)

`_tool_module` ()

`class SCons.Tool.ToolInitializer` (*env*, *tools*, *names*)

Bases: `object`

A class for delayed initialization of Tools modules.

Instances of this class associate a list of Tool modules with a list of Builder method names that will be added by those Tool modules. As part of instantiating this object for a particular construction environment, we also add the appropriate `ToolInitializerMethod` objects for the various Builder methods that we want to use to delay Tool searches until necessary.

`apply_tools` (*env*)

Searches the list of associated Tool modules for one that exists, and applies that to the construction environment.

`remove_methods` (*env*)

Removes the methods that were added by the tool initialization so we no longer copy and re-bind them when the construction environment gets cloned.

`class SCons.Tool.ToolInitializerMethod` (*name*, *initializer*)

Bases: `object`

This is added to a construction environment in place of a method(s) normally called for a Builder (`env.Object`, `env.StaticObject`, etc.). When called, it has its associated `ToolInitializer` object search the specified list of tools and apply the first one that exists to the construction environment. It then calls whatever builder was (presumably) added to the construction environment in place of this particular instance.

`get_builder` (*env*)

Returns the appropriate real Builder for this method name after having the associated `ToolInitializer` object apply the appropriate Tool module.

```
class SCons.Tool._ImpLibInfoSupport
```

```
  Bases: object
```

```
  get_lib_noversionssymlinks (env, *args, **kw)
```

```
  get_lib_prefix (env, *args, **kw)
```

```
  get_lib_suffix (env, *args, **kw)
```

```
  get_lib_version (env, *args, **kw)
```

```
  property libtype
```

```
class SCons.Tool._LdModInfoSupport
```

```
  Bases: object
```

```
  get_lib_noversionssymlinks (env, *args, **kw)
```

```
  get_lib_prefix (env, *args, **kw)
```

```
  get_lib_suffix (env, *args, **kw)
```

```
  get_lib_version (env, *args, **kw)
```

```
  property libtype
```

```
class SCons.Tool._LibInfoGeneratorBase (libtype, infoname)
```

```
  Bases: object
```

Generator base class for library-related info such as suffixes for versioned libraries, symlink maps, sonames etc. It handles commonities of SharedLibrary and LoadableModule

```
  _support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
  generate_versioned_lib_info (env, args, result=None, **kw)
```

```
  get_lib_noversionssymlinks (env, *args, **kw)
```

```
  get_lib_prefix (env, *args, **kw)
```

```
  get_lib_suffix (env, *args, **kw)
```

```
  get_lib_version (env, *args, **kw)
```

```
  get_versioned_lib_info_generator (**kw)
```

```
  property libtype
```

```
class SCons.Tool._LibNameGenerator (libtype)
```

```
  Bases: SCons.Tool._LibInfoGeneratorBase
```

Generates “unmangled” library name from a library file node.

Generally, it’s thought to revert modifications done by prefix/suffix generators (`_LibPrefixGenerator/_LibSuffixGenerator`) used by a library builder. For example, on `gnulink` the suffix generator used by `SharedLibrary` builder appends `$SHLIBVERSION` to `$SHLIBSUFFIX` producing node name which ends with `“$SHLIBSUFFIX.$SHLIBVERSION”`. Correspondingly, the implementation of `_LibNameGenerator` replaces `“$SHLIBSUFFIX.$SHLIBVERSION”` with `“$SHLIBSUFFIX”` in the node’s basename. So that, if `$SHLIBSUFFIX` is `“.so”`, `$SHLIBVERSION` is `“0.1.2”` and the node path is `“foo/bar/libfoo.so.0.1.2”`, the `_LibNameGenerator` shall return `“libfoo.so”`. Other link tools may implement it’s own way of library name unmangling.

```
  _support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibPrefixGenerator (libtype)
```

```
Bases: SCons.Tool._LibInfoGeneratorBase
```

```
Library prefix generator, used as target_prefix in SharedLibrary and LoadableModule builders
```

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class  
'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibSonameGenerator (libtype)
```

```
Bases: SCons.Tool._LibInfoGeneratorBase
```

```
Library soname generator. Returns library soname (e.g. libfoo.so.0) for a given node (e.g. /foo/bar/libfoo.so.0.1.2)
```

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class  
'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibSuffixGenerator (libtype)
```

```
Bases: SCons.Tool._LibInfoGeneratorBase
```

```
Library suffix generator, used as target_suffix in SharedLibrary and LoadableModule builders
```

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibSymlinkGenerator (libtype)
```

```
Bases: SCons.Tool._LibInfoGeneratorBase
```

Library symlink map generator. It generates a list of symlinks that should be created by SharedLibrary or LoadableModule builders

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._ShLibInfoSupport
```

```
Bases: object
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

property libtype

```
SCons.Tool._call_env_subst (env, string, *args, **kw)
```

```
SCons.Tool._call_linker_cb (env, callback, args, result=None)
```

Returns the result of `env['LINKCALLBACKS'][callback](args)` if `env['LINKCALLBACKS']` is a dictionary and `env['LINKCALLBACKS'][callback]` is callable. If these conditions are not met, return the value provided as the `*result` argument. This function is mainly used for generating library info such as versioned suffixes, symlink maps, sonames etc. by delegating the core job to callbacks configured by current linker tool

```
SCons.Tool.createCFileBuilders (env)
```

This is a utility function that creates the CFile/CXXFile Builders in an Environment if they are not there already.

If they are there already, we return the existing ones.
 This is a separate function because soooo many Tools use this functionality.
 The return is a 2-tuple of (CFile, CXXFile)

`SCons.Tool.createLoadableModuleBuilder` (*env*)

This is a utility function that creates the LoadableModule Builder in an Environment if it is not there already.
 If it is already there, we return the existing one.

`SCons.Tool.createObjBuilders` (*env*)

This is a utility function that creates the StaticObject and SharedObject Builders in an Environment if they are not there already.
 If they are there already, we return the existing ones.
 This is a separate function because soooo many Tools use this functionality.
 The return is a 2-tuple of (StaticObject, SharedObject)

`SCons.Tool.createProgBuilder` (*env*)

This is a utility function that creates the Program Builder in an Environment if it is not there already.
 If it is already there, we return the existing one.

`SCons.Tool.createSharedLibBuilder` (*env*)

This is a utility function that creates the SharedLibrary Builder in an Environment if it is not there already.
 If it is already there, we return the existing one.

`SCons.Tool.createStaticLibBuilder` (*env*)

This is a utility function that creates the StaticLibrary Builder in an Environment if it is not there already.
 If it is already there, we return the existing one.

`SCons.Tool.find_program_path` (*env*, *key_program*, *default_paths*=None)

Find the location of a tool using various means.
 Mainly for windows where tools aren't all installed in /usr/bin, etc.

Parameters:

- **env** – Current Construction Environment.
- **key_program** – Tool to locate.
- **default_paths** – List of additional paths this tool might be found in.

`SCons.Tool.tool_list` (*platform*, *env*)

SCons.Variables package

Submodules

SCons.Variables.BoolVariable module

`SCons.Variables.BoolVariable`

This file defines the option type for SCons implementing true/false values.

Usage example:

```
opts = Variables()
opts.Add(BoolVariable('embedded', 'build for an embedded system', 0))
...
if env['embedded'] == 1:
...
```

`SCons.Variables.BoolVariable.BoolVariable` (*key*, *help*, *default*)

The input parameters describe a boolean option, thus they are returned with the correct converter and validator appended. The 'help' text will be appended by '(yes|no) to show the valid valued. The result is usable for input to `opts.Add()`.

SCons.Variables.EnumVariable module

`SCons.Variables.EnumVariable`

This file defines the option type for SCons allowing only specified input-values.

Usage example:

```
opts = Variables()
opts.Add(EnumVariable('debug', 'debug output and symbols', 'no',
                    allowed_values=('yes', 'no', 'full'),
                    map={}, ignorecase=2))
...
if env['debug'] == 'full':
...

```

SCons.Variables.EnumVariable.**EnumVariable** (key, help, default, allowed_values, map={}, ignorecase=0)

The input parameters describe an option with only certain values allowed. They are returned with an appropriate converter and validator appended. The result is usable for input to Variables.Add().

'key' and 'default' are the values to be passed on to Variables.Add().

'help' will be appended by the allowed values automatically

'allowed_values' is a list of strings, which are allowed as values for this option.

The 'map'-dictionary may be used for converting the input value into canonical values (e.g. for aliases).

'ignorecase' defines the behaviour of the validator:

If ignorecase == 0, the validator/converter are case-sensitive. If ignorecase == 1, the validator/converter are case-insensitive. If ignorecase == 2, the validator/converter is case-insensitive and the converted value will always be lower-case.

The 'validator' tests whether the value is in the list of allowed values. The 'converter' converts input values according to the given 'map'-dictionary (unmapped input values are returned unchanged).

SCons.Variables.ListVariable module

SCons.Variables.ListVariable

This file defines the option type for SCons implementing 'lists'.

A 'list' option may either be 'all', 'none' or a list of names separated by comma. After the option has been processed, the option value holds either the named list elements, all list elements or no list elements at all.

Usage example:

```
list_of_libs = Split('x11 gl qt ical')

opts = Variables()
opts.Add(ListVariable('shared',
                    'libraries to build as shared libraries',
                    'all',
                    elems = list_of_libs))
...
for lib in list_of_libs:
    if lib in env['shared']:
        env.SharedObject(...)
    else:
        env.Object(...)
```

SCons.Variables.ListVariable.**ListVariable** (key, help, default, names, map={})

The input parameters describe a 'package list' option, thus they are returned with the correct converter and validator appended. The result is usable for input to opts.Add().

A 'package list' option may either be 'all', 'none' or a list of package names (separated by space).

SCons.Variables.PackageVariable module

SCons.Variables.PackageVariable

This file defines the option type for SCons implementing 'package activation'.

To be used whenever a 'package' may be enabled/disabled and the package path may be specified.

Usage example:

Examples:

x11=no (disables X11 support) x11=yes (will search for the package installation dir) x11=/usr/local/X11 (will check this path for existence)

To replace autoconf's `--with-xxx=yyy`

```
opts = Variables()
opts.Add(PackageVariable('x11',
                        'use X11 installed here (yes = search some places',
                        'yes'))
...
if env['x11'] == True:
    dir = ... search X11 in some standard places ...
    env['x11'] = dir
if env['x11']:
    ... build with x11 ...
```

`SCons.Variables.PackageVariable.PackageVariable` (key, help, default, searchfunc=None)

The input parameters describe a 'package list' option, thus they are returned with the correct converter and validator appended. The result is usable for input to `opts.Add()`.

A 'package list' option may either be 'all', 'none' or a list of package names (separated by space).

SCons.Variables.PathVariable module

`SCons.Variables.PathVariable`

This file defines an option type for SCons implementing path settings.

To be used whenever a user-specified path override should be allowed.

Arguments to PathVariable are:

option-name = name of this option on the command line (e.g. "prefix")
 option-help = help string for option
 option-dflt = default value for this option
 validator = [optional] validator for option value. Predefined validators are:

PathAccept – accepts any path setting; no validation
 PathsDir – path must be an existing directory
 PathsDirCreate – path must be a dir; will create
 PathsFile – path must be a file
 PathExists – path must exist (any type) [default]

The validator is a function that is called and which should return True or False to indicate if the path is valid. The arguments to the validator function are: (key, val, env). The key is the name of the option, the val is the path specified for the option, and the env is the env to which the Options have been added.

Usage example:

```
Examples:
  prefix=/usr/local

opts = Variables()

opts = Variables()
opts.Add(PathVariable('qtdir',
                    'where the root of Qt is installed',
                    qtdir, PathIsDir))
opts.Add(PathVariable('qt_includes',
                    'where the Qt includes are installed',
                    '$qtdir/includes', PathIsDirCreate))
opts.Add(PathVariable('qt_libraries',
                    'where the Qt library is installed',
                    '$qtdir/lib'))
```

Module contents

SCons.Variables

This file defines the Variables class that is used to add user-friendly customizable variables to an SCons build.

`class SCons.Variables.Variables (files=None, args=None, is_global=True)`

Bases: **object**

Holds all the options, updates the environment with the variables, and renders the help text.

If `is_global` is True, this is a singleton, create only once.

Parameters:

- **files** (*optional*) – List of option configuration files to load (backward compatibility). If a single string is passed it is automatically placed in a file list (Default value = None)
- **args** (*optional*) – dictionary to override values set from *files*. (Default value = None)
- **is_global** (*optional*) – global instance? (Default value = True)

`Add (key, help='', default=None, validator=None, converter=None, **kw)`

Add an option.

Parameters:

- **key** – the name of the variable, or a list or tuple of arguments
- **help** – optional help text for the options (Default value = "")
- **default** – optional default value for option (Default value = None)
- **validator** – optional function called to validate the option's value (Default value = None)
- **converter** – optional function to be called to convert the option's value before putting it in the environment. (Default value = None)
- ****kw** – keyword args, unused.

`AddVariables (*optlist)`

Add a list of options.

Each list element is a tuple/list of arguments to be passed on to the underlying method for adding options.

Example:

```
opt.AddVariables(
    ('debug', '', 0),
    ('CC', 'The C compiler'),
    ('VALIDATE', 'An option for testing validation', 'notset', validator, None),
)
```

`FormatVariableHelpText (env, key, help, default, actual, aliases=[])`

`GenerateHelpText (env, sort=None)`

Generate the help text for the options.

env - an environment that is used to get the current values

of the options.

cmp - Either a function as follows: The specific sort function should take two arguments and return -1, 0 or 1

or a boolean to indicate if it should be sorted.

`Save (filename, env)`

Saves all the options in the given file. This file can then be used to load the options next run. This can be used to create an option cache file.

`filename` - Name of the file to save into `env` - the environment get the option values from

`UnknownVariables ()`

Returns any options in the specified arguments lists that were not known, declared options in this object.

Update (env, args=None)

Update an environment with the option variables.
env - the environment to update.

`_do_add` (key, help='', default=None, validator=None, converter=None)

`format` = '\n%s: %s\n default: %s\n actual: %s\n'

`format_` = '\n%s: %s\n default: %s\n actual: %s\n aliases: %s\n'

`instance` = None

keys ()

Returns the keywords for the options

SCons.compat package***Module contents***

SCons compatibility package for old Python versions

This subpackage holds modules that provide backwards-compatible implementations of various things that we'd like to use in SCons but which only show up in later versions of Python than the early, old version(s) we still support.

Other code will not generally reference things in this package through the SCons.compat namespace. The modules included here add things to the builtins namespace or the global module list so that the rest of our code can use the objects and names imported here regardless of Python version.

The rest of the things here will be in individual compatibility modules that are either: 1) suitably modified copies of the future modules that we want to use; or 2) backwards compatible re-implementations of the specific portions of a future module's API that we want to use.

GENERAL WARNINGS: Implementations of functions in the SCons.compat modules are *NOT* guaranteed to be fully compliant with these functions in later versions of Python. We are only concerned with adding functionality that we actually use in SCons, so be wary if you lift this code for other uses. (That said, making these more nearly the same as later, official versions is still a desirable goal, we just don't need to be obsessive about it.)

We name the compatibility modules with an initial `'_scons_'` (for example, `_scons_subprocess.py` is our compatibility module for subprocess) so that we can still try to import the real module name and fall back to our compatibility module if we get an `ImportError`. The `import_as()` function defined below loads the module as the "real" name (without the `'_scons_'`), after which all of the "import {module}" statements in the rest of our code will find our pre-loaded compatibility module.

```
class SCons.compat.NoSlotsPyPy
```

Bases: `type`

Metaclass for PyPy compatibility.

PyPy does not work well with `__slots__` and `__class__` assignment.

mro ()

Return a type's method resolution order.

```
SCons.compat.rename_module
```

 (new, old)

Attempt to import the old module and load it under the new name. Used for purely cosmetic name changes in Python 3.x.

Submodules***SCons.Action module***

SCons.Action

This encapsulates information about executing any sort of action that can build one or more target Nodes (typically files) from one or more source Nodes (also typically files) given a specific Environment.

The base class here is `ActionBase`. The base class supplies just a few OO utility methods and some generic methods for displaying information about an Action in response to the various commands that control printing.

A second-level base class is `_ActionAction`. This extends `ActionBase` by providing the methods that can be used to show and perform an action. True Action objects will subclass `_ActionAction`; Action factory class objects will subclass `ActionBase`.

The heavy lifting is handled by subclasses for the different types of actions we might execute:

`CommandAction` `CommandGeneratorAction` `FunctionAction` `ListAction`

The subclasses supply the following public interface methods used by other modules:

`__call__()`

THE public interface, “calling” an Action object executes the command or Python function. This also takes care of printing a pre-substitution command for debugging purposes.

`get_contents()`

Fetches the “contents” of an Action for signature calculation plus the varlist. This is what gets MD5 checksummed to decide if a target needs to be rebuilt because its action changed.

`genstring()`

Returns a string representation of the Action *without* command substitution, but allows a `CommandGeneratorAction` to generate the right action based on the specified target, source and env. This is used by the Signature subsystem (through the Executor) to obtain an (imprecise) representation of the Action operation for informative purposes.

Subclasses also supply the following methods for internal use within this module:

`__str__()`

Returns a string approximation of the Action; no variable substitution is performed.

`execute()`

The internal method that really, truly, actually handles the execution of a command or Python function. This is used so that the `__call__()` methods can take care of displaying any pre-substitution representations, and *then* execute an action without worrying about the specific Actions involved.

`get_presig()`

Fetches the “contents” of a subclass for signature calculation. The varlist is added to this to produce the Action’s contents. TODO(?): Change this to always return ascii/bytes and not unicode (or py3 strings)

`strfunction()`

Returns a substituted string representation of the Action. This is used by the `_ActionAction.show()` command to display the command/function that will be executed to generate the target(s).

There is a related independent `ActionCaller` class that looks like a regular Action, and which serves as a wrapper for arbitrary functions that we want to let the user specify the arguments to now, but actually execute later (when an out-of-date check determines that it’s needed to be executed, for example). Objects of this class are returned by an `ActionFactory` class that provides a `__call__()` method as a convenient way for wrapping up the functions.

`SCons.Action.Action` (act, *args, **kw)

A factory for action objects.

`class SCons.Action.ActionBase`

Bases: `object`

Base class for all types of action objects that can be held by other objects (Builders, Executors, etc.) This provides the common methods for manipulating and combining those actions.

`batch_key` (env, target, source)

`genstring` (target, source, env)

`get_contents` (target, source, env)

`get_targets` (env, executor)

Returns the type of targets (`$TARGETS`, `$CHANGED_TARGETS`) used by this action.

get_varlist (target, source, env, executor=None)

no_batch_key (env, target, source)

presub_lines (env)

class SCons.Action.**ActionCaller** (parent, args, kw)

Bases: **object**

A class for delaying calling an Action function with specific (positional and keyword) arguments until the Action is actually executed.

This class looks to the rest of the world like a normal Action object, but what it's really doing is hanging on to the arguments until we have a target, source and env to use for the expansion.

get_contents (target, source, env)

strfunction (target, source, env)

subst (s, target, source, env)

subst_args (target, source, env)

subst_kw (target, source, env)

class SCons.Action.**ActionFactory** (actfunc, strfunc, convert=<function
ActionFactory.<lambda>>)

Bases: **object**

A factory class that will wrap up an arbitrary function as an SCons-executable Action object.

The real heavy lifting here is done by the ActionCaller class. We just collect the (positional and keyword) arguments that we're called with and give them to the ActionCaller object we create, so it can hang onto them until it needs them.

class SCons.Action.**CommandAction** (cmd, **kw)

Bases: SCons.Action.**_ActionAction**

Class for command-execution actions.

_get_implicit_deps_heavyweight (target, source, env, executor, icd_int)

Heavyweight dependency scanning involves scanning more than just the first entry in an action string. The exact behavior depends on the value of icd_int. Only files are taken as implicit dependencies; directories are ignored.

If icd_int is an integer value, it specifies the number of entries to scan for implicit dependencies. Action strings are also scanned after a &&. So for example, if icd_int=2 and the action string is "cd <some_dir> && \$PYTHON \$SCRIPT_PATH <another_path>", the implicit dependencies would be the path to the python binary and the path to the script.

If icd_int is None, all entries are scanned for implicit dependencies.

_get_implicit_deps_lightweight (target, source, env, executor)

Lightweight dependency scanning involves only scanning the first entry in an action string, even if it contains &&.

batch_key (env, target, source)

execute (target, source, env, executor=None)

Execute a command action.

This will handle lists of commands as well as individual commands, because construction variable substitution may turn a single "command" into a list. This means that this class can actually handle lists of commands, even though that's not how we use it externally.

genstring (target, source, env)

get_contents (target, source, env)

get_implicit_deps (target, source, env, executor=None)

Return the implicit dependencies of this action's command line.

get_presig (target, source, env, executor=None)

Return the signature contents of this action's command line.

This strips \$(-\$) and everything in between the string, since those parts don't affect signatures.

get_targets (env, executor)

Returns the type of targets (\$TARGETS, \$CHANGED_TARGETS) used by this action.

get_varlist (target, source, env, executor=None)

no_batch_key (env, target, source)

presub_lines (env)

print_cmd_line (s, target, source, env)

In python 3, and in some of our tests, sys.stdout is a String io object, and it takes unicode strings only This code assumes s is a regular string.

process (target, source, env, executor=None)

strfunction (target, source, env, executor=None)

class SCons.Action.CommandGeneratorAction (generator, kw)

Bases: SCons.Action.ActionBase

Class for command-generator actions.

_generate (target, source, env, for_signature, executor=None)

batch_key (env, target, source)

genstring (target, source, env, executor=None)

get_contents (target, source, env)

get_implicit_deps (target, source, env, executor=None)

get_presig (target, source, env, executor=None)

Return the signature contents of this action's command line.

This strips \$(-\$) and everything in between the string, since those parts don't affect signatures.

get_targets (env, executor)

Returns the type of targets (\$TARGETS, \$CHANGED_TARGETS) used by this action.

get_varlist (target, source, env, executor=None)

no_batch_key (env, target, source)

presub_lines (env)

class SCons.Action.FunctionAction (execfunction, kw)

Bases: SCons.Action._ActionAction

Class for Python function actions.

batch_key (env, target, source)

execute (target, source, env, executor=None)

function_name ()

genstring (target, source, env)

get_contents (target, source, env)

get_implicit_deps (target, source, env)

get_presig (target, source, env)

Return the signature contents of this callable action.

get_targets (env, executor)

Returns the type of targets (\$TARGETS, \$CHANGED_TARGETS) used by this action.

get_varlist (target, source, env, executor=None)

no_batch_key (env, target, source)

presub_lines (env)

print_cmd_line (s, target, source, env)

In python 3, and in some of our tests, sys.stdout is a String io object, and it takes unicode strings only This code assumes s is a regular string.

strfunction (target, source, env, executor=None)

class SCons.Action.LazyAction (var, kw)

Bases: SCons.Action.CommandGeneratorAction, SCons.Action.CommandAction

A LazyAction is a kind of hybrid generator and command action for strings of the form "\$VAR". These strings normally expand to other strings (think "\$CCCOM" to "\$CC -c -o \$TARGET \$SOURCE"), but we also want to be able to replace them with functions in the construction environment. Consequently, we want lazy evaluation and creation of an Action in the case of the function, but that's overkill in the more normal case of expansion to other strings.

So we do this with a subclass that's both a generator *and* a command action. The overridden methods all do a quick check of the construction variable, and if it's a string we just call the corresponding CommandAction method to do the heavy lifting. If not, then we call the same-named CommandGeneratorAction method. The CommandGeneratorAction methods work by using the overridden _generate() method, that is, our own way of handling "generation" of an action based on what's in the construction variable.

_generate (target, source, env, for_signature, executor=None)

_generate_cache (env)

_get_implicit_deps_heavyweight (target, source, env, executor, icd_int)

Heavyweight dependency scanning involves scanning more than just the first entry in an action string. The exact behavior depends on the value of icd_int. Only files are taken as implicit dependencies; directories are ignored.

If icd_int is an integer value, it specifies the number of entries to scan for implicit dependencies. Action strings are also scanned after a &&. So for example, if icd_int=2 and the action string is "cd <some_dir> && \$PYTHON \$SCRIPT_PATH <another_path>", the implicit dependencies would be the path to the python binary and the path to the script.

If icd_int is None, all entries are scanned for implicit dependencies.

_get_implicit_deps_lightweight (target, source, env, executor)

Lightweight dependency scanning involves only scanning the first entry in an action string, even if it contains &&.

batch_key (env, target, source)

execute (target, source, env, executor=None)

Execute a command action.

This will handle lists of commands as well as individual commands, because construction variable substitution may turn a single "command" into a list. This means that this class can actually handle lists of commands, even though that's not how we use it externally.

genstring (target, source, env, executor=None)

get_contents (target, source, env)

get_implicit_deps (target, source, env, executor=None)

get_parent_class (env)

get_presig (target, source, env)

Return the signature contents of this action's command line.

This strips \$(-\$) and everything in between the string, since those parts don't affect signatures.

get_targets (env, executor)

Returns the type of targets (\$TARGETS, \$CHANGED_TARGETS) used by this action.

get_varlist (target, source, env, executor=None)

no_batch_key (env, target, source)

presub_lines (env)

print_cmd_line (s, target, source, env)

In python 3, and in some of our tests, sys.stdout is a String io object, and it takes unicode strings only This code assumes s is a regular string.

process (target, source, env, executor=None)

strfunction (target, source, env, executor=None)

class SCons.Action.ListAction (actionlist)

Bases: **SCons.Action.ActionBase**

Class for lists of other actions.

batch_key (env, target, source)

genstring (target, source, env)

get_contents (target, source, env)

get_implicit_deps (target, source, env)

get_presig (target, source, env)

Return the signature contents of this action list.

Simple concatenation of the signatures of the elements.

get_targets (env, executor)

Returns the type of targets (\$TARGETS, \$CHANGED_TARGETS) used by this action.

get_varlist (target, source, env, executor=None)

no_batch_key (env, target, source)

presub_lines (env)

class SCons.Action._ActionAction (cmdstr=<class 'SCons.Action._null'>, strfunction=<class 'SCons.Action._null'>, varlist=(), presub=<class 'SCons.Action._null'>, chdir=None, exitstatfunc=None, batch_key=None, targets='\$TARGETS', **kw)

Bases: **SCons.Action.ActionBase**

Base class for actions that create output objects.

batch_key (env, target, source)

genstring (target, source, env)

get_contents (target, source, env)

get_targets (env, executor)

Returns the type of targets (\$TARGETS, \$CHANGED_TARGETS) used by this action.

get_varlist (target, source, env, executor=None)

no_batch_key (env, target, source)

presub_lines (env)

print_cmd_line (s, target, source, env)

In python 3, and in some of our tests, sys.stdout is a String io object, and it takes unicode strings only This code assumes s is a regular string.

SCons.Action.**_actionAppend** (act1, act2)

SCons.Action.**_callable_contents** (obj)

Return the signature contents of a callable Python object.

SCons.Action.**_code_contents** (code, docstring=None)

Return the signature contents of a code object.

By providing direct access to the code object of the function, Python makes this extremely easy. Hooray!

Unfortunately, older versions of Python include line number indications in the compiled byte code. Boo! So we remove the line number byte codes to prevent recompilations from moving a Python function.

See:

- <https://docs.python.org/2/library/inspect.html>
- <http://python-reference.readthedocs.io/en/latest/docs/code/index.html>

For info on what each co_ variable provides

The signature is as follows (should be byte/chars): co_argcount, len(co_varnames), len(co_cellvars), len(co_freevars), (comma separated signature for each object in co_consts), (comma separated signature for each object in co_names), (The bytecode with line number bytecodes removed from co_code)

co_argcount - Returns the number of positional arguments (including arguments with default values).

co_varnames - Returns a tuple containing the names of the local variables (starting with the argument names).

co_cellvars - Returns a tuple containing the names of local variables that are referenced by nested functions.

co_freevars - Returns a tuple containing the names of free variables. (?) co_consts - Returns a tuple containing

the literals used by the bytecode. co_names - Returns a tuple containing the names used by the bytecode.

co_code - Returns a string representing the sequence of bytecode instructions.

SCons.Action.**_do_create_action** (act, kw)

This is the actual “implementation” for the Action factory method, below. This handles the fact that passing lists to Action() itself has different semantics than passing lists as elements of lists.

The former will create a ListAction, the latter will create a CommandAction by converting the inner list elements to strings.

SCons.Action.**_do_create_keywords** (args, kw)

This converts any arguments after the action argument into their equivalent keywords and adds them to the kw argument.

SCons.Action.**_do_create_list_action** (act, kw)

A factory for list actions. Convert the input list into Actions and then wrap them in a ListAction.

SCons.Action.**_function_contents** (func)

The signature is as follows (should be byte/chars): < _code_contents (see above) from func.__code__ > ,(comma separated _object_contents for function argument defaults) ,(comma separated _object_contents for any closure contents)

See also: <https://docs.python.org/3/reference/datamodel.html>

- func.__code__ - The code object representing the compiled function body.
- func.__defaults__ - A tuple containing default argument values for those arguments that have defaults, or None if no arguments have a default value
- func.__closure__ - None or a tuple of cells that contain bindings for the function’s free variables.

Returns: Signature contents of a function. (in bytes)


```
class SCons.Action._null
```

```
  Bases: object
```

```
SCons.Action._object_contents (obj)
```

Return the signature contents of any Python object.

We have to handle the case where object contains a code object since it can be pickled directly.

```
SCons.Action._object_instance_content (obj)
```

Returns consistant content for a action class or an instance thereof

Parameters:

- *obj* Should be either and action class or an instance thereof

Returns: bytearray or bytes representing the obj suitable for generating a signature from.

```
SCons.Action._string_from_cmd_list (cmd_list)
```

Takes a list of command line arguments and returns a pretty representation for printing.

```
SCons.Action._subproc (scons_env, cmd, error='ignore', **kw)
```

Wrapper for subprocess which pulls from construction env.

Use for calls to subprocess which need to interpolate values from an SCons construction environment into the environment passed to subprocess. Adds an an error-handling argument. Adds ability to specify std{in,out,err} with “devnull” tag.

```
SCons.Action.default_exitstatfunc (s)
```

```
SCons.Action.get_default_ENV (env)
```

A fiddlin’ little function that has an ‘import SCons.Environment’ which can’t be moved to the top level without creating an import loop. Since this import creates a local variable named ‘SCons’, it blocks access to the global variable, so we move it here to prevent complaints about local variables being used uninitialized.

```
SCons.Action.rfile (n)
```

SCons.Builder module

SCons.Builder

Builder object subsystem.

A Builder object is a callable that encapsulates information about how to execute actions to create a target Node (file) from source Nodes (files), and how to create those dependencies for tracking.

The main entry point here is the Builder() factory method. This provides a procedural interface that creates the right underlying Builder object based on the keyword arguments supplied and the types of the arguments.

The goal is for this external interface to be simple enough that the vast majority of users can create new Builders as necessary to support building new types of files in their configurations, without having to dive any deeper into this subsystem.

The base class here is BuilderBase. This is a concrete base class which does, in fact, represent the Builder objects that we (or users) create.

There is also a proxy that looks like a Builder:

CompositeBuilder

This proxies for a Builder with an action that is actually a dictionary that knows how to map file suffixes to a specific action. This is so that we can invoke different actions (compilers, compile options) for different flavors of source files.

Builders and their proxies have the following public interface methods used by other modules:

- **__call__()**

THE public interface. Calling a Builder object (with the use of internal helper methods) sets up the target and source dependencies, appropriate mapping to a specific action, and the environment manipulation necessary for overridden construction variable. This also takes care of warning about possible mistakes in keyword arguments.

- **add_emitter()**

Adds an emitter for a specific file suffix, used by some Tool modules to specify that (for example) a yacc invocation on a .y can create a .h *and* a .c file.

- **add_action()**

Adds an action for a specific file suffix, heavily used by Tool modules to add their specific action(s) for turning a source file into an object file to the global static and shared object file Builders.

There are the following methods for internal use within this module:

- **_execute()**

The internal method that handles the heavily lifting when a Builder is called. This is used so that the `__call__()` methods can set up warning about possible mistakes in keyword-argument overrides, and *then* execute all of the steps necessary so that the warnings only occur once.

- **get_name()**

Returns the Builder's name within a specific Environment, primarily used to try to return helpful information in error messages.

- **adjust_suffix()**

- **get_prefix()**

- **get_suffix()**

- **get_src_suffix()**

- **set_src_suffix()**

Miscellaneous stuff for handling the prefix and suffix manipulation we use in turning source file names into target file names.

`SCons.Builder.Builder` (**kw)
A factory for builder objects.

```
class SCons.Builder.BuilderBase (action=None, prefix='', suffix='', src_suffix='',
target_factory=None, source_factory=None, target_scanner=None, source_scanner=None,
emitter=None, multi=0, env=None, single_source=0, name=None, chdir=<class
'SCons.Builder._Null'>, is_explicit=1, src_builder=None, ensure_suffix=False, **overrides)
```

Bases: **object**

Base class for Builders, objects that create output nodes (files) from input nodes (files).

```
_adjustixes (files, pre, suf, ensure_suffix=False)
```

```
_create_nodes (env, target=None, source=None)  
Create and return lists of target and source nodes.
```

```
_execute (env, target, source, overwarn={}, executor_kw={})
```

```
_get_sdict (env)
```

Returns a dictionary mapping all of the source suffixes of all `src_builders` of this Builder to the underlying Builder that should be called first.

This dictionary is used for each target specified, so we save a lot of extra computation by memoizing it for each construction environment.

Note that this is re-computed each time, not cached, because there might be changes to one of our source Builders (or one of their source Builders, and so on, and so on...) that we can't "see."

The underlying methods we call cache their computed values, though, so we hope repeatedly aggregating them into a dictionary like this won't be too big a hit. We may need to look for a better way to do this if performance data show this has turned into a significant bottleneck.

```
_get_src_builders_key (env)
```

```
_subst_src_suffixes_key (env)
```

```
add_emitter (suffix, emitter)
```

Add a suffix-emitter mapping to this Builder.

This assumes that emitter has been initialized with an appropriate dictionary type, and will throw a `TypeError` if not, so the caller is responsible for knowing that this is an appropriate method to call for the Builder in question.

add_src_builder (*builder*)

Add a new Builder to the list of `src_builders`.

This requires wiping out cached values so that the computed lists of source suffixes get re-calculated.

adjust_suffix (*suff*)

get_name (*env*)

Attempts to get the name of the Builder.

Look at the `BUILDERS` variable of *env*, expecting it to be a dictionary containing this Builder, and return the key of the dictionary. If there's no key, then return a directly-configured name (if there is one) or the name of the class (by default).

get_prefix (*env*, *sources*=[])

get_src_builders (*env*)

Returns the list of source Builders for this Builder.

This exists mainly to look up Builders referenced as strings in the 'BUILDER' variable of the construction environment and cache the result.

get_src_suffix (*env*)

Get the first `src_suffix` in the list of `src_suffixes`.

get_suffix (*env*, *sources*=[])

set_src_suffix (*src_suffix*)

set_suffix (*suffix*)

splitext (*path*, *env*=None)

src_builder_sources (*env*, *source*, *overwarn*={ })

src_suffixes (*env*)

Returns the list of source suffixes for all `src_builders` of this Builder.

This is essentially a recursive descent of the `src_builder` "tree." (This value isn't cached because there may be changes in a `src_builder` many levels deep that we can't see.)

subst_src_suffixes (*env*)

The suffix list may contain construction variable expansions, so we have to evaluate the individual strings. To avoid doing this over and over, we memoize the results for each construction environment.

class `SCons.Builder.CallableSelector`

Bases: `SCons.Util.Selector`

A callable dictionary that will, in turn, call the value it finds if it can.

clear () → None. Remove all items from `od`.

copy () → a shallow copy of `od`

fromkeys ()

Create a new ordered dictionary with keys from iterable and values set to value.

get ()

Return the value for key if key is in the dictionary, else default.

items () → a set-like object providing a view on D's items

keys () → a set-like object providing a view on D's keys

move_to_end ()

Move an existing element to the end (or beginning if last is false).
Raise `KeyError` if the element does not exist.

pop (k[, d]) → v, remove specified key and return the corresponding value. If key is not found, d is returned if given, otherwise `KeyError` is raised.

popitem ()

Remove and return a (key, value) pair from the dictionary.
Pairs are returned in LIFO order if last is true or FIFO order if false.

setdefault ()

Insert key with a value of default if key is not in the dictionary.
Return the value for key if key is in the dictionary, else default.

update ([, E], **F) → None. Update D from dict/iterable E and F.

If E is present and has a `.keys()` method, then does: for k in E: `D[k] = E[k]` If E is present and lacks a `.keys()` method, then does: for k, v in E: `D[k] = v` In either case, this is followed by: for k in F: `D[k] = F[k]`

values () → an object providing a view on D's values

class `SCons.Builder.CompositeBuilder (builder, cmdgen)`

Bases: `SCons.Util.Proxy`

A Builder Proxy whose main purpose is to always have a `DictCmdGenerator` as its action, and to provide access to the `DictCmdGenerator`'s `add_action()` method.

add_action (suffix, action)

get ()

Retrieve the entire wrapped object

class `SCons.Builder.DictCmdGenerator (dict=None, source_ext_match=1)`

Bases: `SCons.Util.Selector`

This is a callable class that can be used as a command generator function. It holds on to a dictionary mapping file suffixes to Actions. It uses that dictionary to return the proper action based on the file suffix of the source file.

add_action (suffix, action)

Add a suffix-action pair to the mapping.

clear () → None. Remove all items from od.

copy () → a shallow copy of od

fromkeys ()

Create a new ordered dictionary with keys from iterable and values set to value.

get ()

Return the value for key if key is in the dictionary, else default.

items () → a set-like object providing a view on D's items

keys () → a set-like object providing a view on D's keys

move_to_end ()

Move an existing element to the end (or beginning if last is false).
Raise `KeyError` if the element does not exist.

pop (k[, d]) → v, remove specified key and return the corresponding value. If key is not found, d is returned if given, otherwise `KeyError` is raised.

popitem ()

Remove and return a (key, value) pair from the dictionary.
Pairs are returned in LIFO order if last is true or FIFO order if false.

setdefault ()

Insert key with a value of default if key is not in the dictionary.
Return the value for key if key is in the dictionary, else default.

src_suffixes ()

update ([, E], **F) → None. Update D from dict/iterable E and F.

If E is present and has a .keys() method, then does: for k in E: D[k] = E[k] If E is present and lacks a .keys() method, then does: for k, v in E: D[k] = v In either case, this is followed by: for k in F: D[k] = F[k]

values () → an object providing a view on D's values

class SCons.Builder.DictEmitter

Bases: **SCons.Util.Selector**

A callable dictionary that maps file suffixes to emitters. When called, it finds the right emitter in its dictionary for the suffix of the first source file, and calls that emitter to get the right lists of targets and sources to return. If there's no emitter for the suffix in its dictionary, the original target and source are returned.

clear () → None. Remove all items from od.

copy () → a shallow copy of od

fromkeys ()

Create a new ordered dictionary with keys from iterable and values set to value.

get ()

Return the value for key if key is in the dictionary, else default.

items () → a set-like object providing a view on D's items

keys () → a set-like object providing a view on D's keys

move_to_end ()

Move an existing element to the end (or beginning if last is false).
Raise KeyError if the element does not exist.

pop (k[, d]) → v, remove specified key and return the corresponding value. If key is not found, d is returned if given, otherwise KeyError is raised.

popitem ()

Remove and return a (key, value) pair from the dictionary.
Pairs are returned in LIFO order if last is true or FIFO order if false.

setdefault ()

Insert key with a value of default if key is not in the dictionary.
Return the value for key if key is in the dictionary, else default.

update ([, E], **F) → None. Update D from dict/iterable E and F.

If E is present and has a .keys() method, then does: for k in E: D[k] = E[k] If E is present and lacks a .keys() method, then does: for k, v in E: D[k] = v In either case, this is followed by: for k in F: D[k] = F[k]

values () → an object providing a view on D's values

class SCons.Builder.EmitterProxy (var)

Bases: **object**

This is a callable class that can act as a Builder emitter. It holds on to a string that is a key into an Environment dictionary, and will look there at actual build time to see if it holds a callable. If so, we will call that as the actual emitter.

```
class SCons.Builder.ListEmitter (initlist=None)
```

```
Bases: collections.UserList
```

A callable list of emitters that calls each in sequence, returning the result.

```
_UserList__cast (other)
```

```
_abc_impl = <_abc_data object>
```

```
append (item)
```

S.append(value) – append value to the end of the sequence

```
clear () → None -- remove all items from S
```

```
copy ()
```

```
count (value) → integer -- return number of occurrences of value
```

```
extend (other)
```

S.extend(iterable) – extend sequence by appending elements from the iterable

```
index (value[, start[, stop]]) → integer -- return first index of value.
```

Raises ValueError if the value is not present.

Supporting start and stop arguments is optional, but recommended.

```
insert (i, item)
```

S.insert(index, value) – insert value before index

```
pop ([, index]) → item -- remove and return item at index (default last).
```

Raise IndexError if list is empty or index is out of range.

```
remove (item)
```

S.remove(value) – remove first occurrence of value. Raise ValueError if the value is not present.

```
reverse ()
```

S.reverse() – reverse *IN PLACE*

```
sort (*args, **kwds)
```

```
class SCons.Builder.OverrideWarner (dict)
```

```
Bases: collections.UserDict
```

A class for warning about keyword arguments that we use as overrides in a Builder call.

This class exists to handle the fact that a single Builder call can actually invoke multiple builders. This class only emits the warnings once, no matter how many Builders are invoked.

```
_MutableMapping__marker = <object object>
```

```
_abc_impl = <_abc_data object>
```

```
clear () → None. Remove all items from D.
```

```
copy ()
```

```
classmethod fromkeys (iterable, value=None)
```

```
get (k[, d]) → D[k] if k in D, else d. d defaults to None.
```

```
items () → a set-like object providing a view on D's items
```

```
keys () → a set-like object providing a view on D's keys
```

```
pop (k[, d]) → v, remove specified key and return the corresponding value.
```

If key is not found, d is returned if given, otherwise KeyError is raised.

popitem () → (k, v), remove and return some (key, value) pair as a 2-tuple; but raise KeyError if D is empty.

setdefault (k[, d]) → D.get(k,d), also set D[k]=d if k not in D

update ([, E], **F) → None. Update D from mapping/iterable E and F.

If E present and has a .keys() method, does: for k in E: D[k] = E[k] If E present and lacks .keys() method, does: for (k, v) in E: D[k] = v In either case, this is followed by: for k, v in F.items(): D[k] = v

values () → an object providing a view on D's values

warn ()

`class SCons.Builder._Null`

Bases: `object`

`SCons.Builder._node_errors (builder, env, tlist, slist)`

Validate that the lists of target and source nodes are legal for this builder and environment. Raise errors or issue warnings as appropriate.

`SCons.Builder._null`

alias of `SCons.Builder._Null`

`SCons.Builder.is_a_Builder (obj)`

“Returns True if the specified obj is one of our Builder classes.

The test is complicated a bit by the fact that CompositeBuilder is a proxy, not a subclass of BuilderBase.

`SCons.Builder.match_splitext (path, suffixes=[])`

SCons.CacheDir module

CacheDir support

`class SCons.CacheDir.CacheDir (path)`

Bases: `object`

`CacheDebug (fmt, target, cachefile)`

`_readconfig (path)`

Read the cache config.

If directory or config file do not exist, create. Take advantage of Py3 capability in `os.makedirs()` and in `file open()`: just try the operation and handle failure appropriately.

Omit the check for old cache format, assume that's old enough there will be none of those left to worry about.

Parameters: `path` – path to the cache directory

`cachepath (node)`

`property hit_ratio`

`is_enabled ()`

`is_readonly ()`

`property misses`

`push (node)`

`push_if_forced (node)`

retrieve (node)

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Note that there's a special trick here with the execute flag (one that's not normally done for other actions). Basically if the user requested a no_exec (-n) build, then SCons.Action.execute_actions is set to 0 and when any action is called, it does its showing but then just returns zero instead of actually calling the action execution operation. The problem for caching is that if the file does NOT exist in cache then the CacheRetrieveString won't return anything to show for the task, but the Action.__call__ won't call CacheRetrieveFunc; instead it just returns zero, which makes the code below think that the file was successfully retrieved from the cache, therefore it doesn't do any subsequent building. However, the CacheRetrieveString didn't print anything because it didn't actually exist in the cache, and no more build actions will be performed, so the user just sees nothing. The fix is to tell Action.__call__ to always execute the CacheRetrieveFunc and then have the latter explicitly check SCons.Action.execute_actions itself.

SCons.CacheDir.**CachePushFunc** (target, source, env)

SCons.CacheDir.**CacheRetrieveFunc** (target, source, env)

SCons.CacheDir.**CacheRetrieveString** (target, source, env)

SCons.Conftest module

SCons.Conftest

Autoconf-like configuration support; low level implementation of tests.

SCons.Conftest.**CheckBuilder** (context, text=None, language=None)

Configure check to see if the compiler works. Note that this uses the current value of compiler and linker flags, make sure \$CFLAGS, \$CPPFLAGS and \$LIBS are set correctly. "language" should be "C" or "C++" and is used to select the compiler. Default is "C". "text" may be used to specify the code to be build. Returns an empty string for success, an error message for failure.

SCons.Conftest.**CheckCC** (context)

Configure check for a working C compiler.

This checks whether the C compiler, as defined in the \$CC construction variable, can compile a C source file. It uses the current \$CCCOM value too, so that it can test against non working flags.

SCons.Conftest.**CheckCXX** (context)

Configure check for a working CXX compiler.

This checks whether the CXX compiler, as defined in the \$CXX construction variable, can compile a CXX source file. It uses the current \$CXXCOM value too, so that it can test against non working flags.

SCons.Conftest.**CheckDeclaration** (context, symbol, includes=None, language=None)

Checks whether symbol is declared.

Use the same test as autoconf, that is test whether the symbol is defined as a macro or can be used as an r-value.

Parameters:

- **symbol** – str the symbol to check
- **includes** – str Optional "header" can be defined to include a header file.
- **language** – str only C and C++ supported.

Returns: bool True if the check failed, False if succeeded.

Return type: status

SCons.Conftest.**CheckFunc** (context, function_name, header=None, language=None)

Configure check for a function "function_name". "language" should be "C" or "C++" and is used to select the compiler. Default is "C". Optional "header" can be defined to define a function prototype, include a header file or anything else that comes before main(). Sets HAVE_function_name in context.havedict according to the result. Note that this uses the current value of compiler and linker flags, make sure \$CFLAGS, \$CPPFLAGS and \$LIBS are set correctly. Returns an empty string for success, an error message for failure.

SCons.Conftest.**CheckHeader** (context, header_name, header=None, language=None, include_quotes=None)

Configure check for a C or C++ header file "header_name". Optional "header" can be defined to do something before including the header file (unusual, supported for consistency). "language" should be "C" or "C++" and is used to select the compiler. Default is "C". Sets HAVE_header_name in context.havedict according to the result.

Note that this uses the current value of compiler and linker flags, make sure \$CFLAGS and \$CPPFLAGS are set correctly. Returns an empty string for success, an error message for failure.

`SCons.Conftest.CheckLib(context, libs, func_name=None, header=None, extra_libs=None, call=None, language=None, autoadd=1, append=True)`

Configure check for a C or C++ libraries “libs”. Searches through the list of libraries, until one is found where the test succeeds. Tests if “func_name” or “call” exists in the library. Note: if it exists in another library the test succeeds anyway! Optional “header” can be defined to include a header file. If not given a default prototype for “func_name” is added. Optional “extra_libs” is a list of library names to be added after “lib_name” in the build command. To be used for libraries that “lib_name” depends on. Optional “call” replaces the call to “func_name” in the test code. It must consist of complete C statements, including a trailing “;”. Both “func_name” and “call” arguments are optional, and in that case, just linking against the libs is tested. “language” should be “C” or “C++” and is used to select the compiler. Default is “C”. Note that this uses the current value of compiler and linker flags, make sure \$CFLAGS, \$CPPFLAGS and \$LIBS are set correctly. Returns an empty string for success, an error message for failure.

`SCons.Conftest.CheckProg(context, prog_name)`

Configure check for a specific program.

Check whether program prog_name exists in path. If it is found, returns the path for it, otherwise returns None.

`SCons.Conftest.CheckSHCC(context)`

Configure check for a working shared C compiler.

This checks whether the C compiler, as defined in the \$SHCC construction variable, can compile a C source file. It uses the current \$SHCCCOM value too, so that it can test against non working flags.

`SCons.Conftest.CheckSHCXX(context)`

Configure check for a working shared CXX compiler.

This checks whether the CXX compiler, as defined in the \$SHCXX construction variable, can compile a CXX source file. It uses the current \$SHCXXCOM value too, so that it can test against non working flags.

`SCons.Conftest.CheckType(context, type_name, fallback=None, header=None, language=None)`

Configure check for a C or C++ type “type_name”. Optional “header” can be defined to include a header file. “language” should be “C” or “C++” and is used to select the compiler. Default is “C”. Sets HAVE_type_name in context.havedict according to the result. Note that this uses the current value of compiler and linker flags, make sure \$CFLAGS, \$CPPFLAGS and \$LIBS are set correctly. Returns an empty string for success, an error message for failure.

`SCons.Conftest.CheckTypeSize(context, type_name, header=None, language=None, expect=None)`

This check can be used to get the size of a given type, or to check whether the type is of expected size.

Parameters:

- **type** (-) – str the type to check
- **includes** (-) – sequence list of headers to include in the test code before testing the type
- **language** (-) – str ‘C’ or ‘C++’
- **expect** (-) – int if given, will test whether the type has the given number of bytes. If not given, will automatically find the size.
- **Returns** – statusint0 if the check failed, or the found size of the type if the check succeeded.

`SCons.Conftest._Have(context, key, have, comment=None)`

Store result of a test in context.havedict and context.headerfilename.

Parameters:

- **key** - is a “HAVE_abc” name. It is turned into all CAPITALS and non-alphanumerics are replaced by an underscore.
- **have** - value as it should appear in the header file, include quotes when desired and escape special characters!
- **comment** is the C comment to add above the line defining the symbol (the comment is automatically put inside a /* */). If None, no comment is added.

The value of “have” can be:

- 1 - Feature is defined, add “#define key”.
- 0 - Feature is not defined, add “/* #undef key */”. Adding “undef” is what autoconf does. Not useful for the compiler, but it shows that the test was done.
- number - Feature is defined to this number “#define key have”. Doesn’t work for 0 or 1, use a string then.
- string - Feature is defined to this string “#define key have”.

`SCons.Conftest._LogFailed` (context, text, msg)

Write to the log about a failed program. Add line numbers, so that error messages can be understood.

`SCons.Conftest._YesNoResult` (context, ret, key, text, comment=None)

Handle the result of a test with a “yes” or “no” result.

Parameters:

- *ret* is the return value: empty if OK, error message when not.
- *key* is the name of the symbol to be defined (HAVE_foo).
- *text* is the source code of the program used for testing.
- *comment* is the C comment to add above the line defining the symbol (the comment is automatically put inside a /* */). If None, no comment is added.

`SCons.Conftest._check_empty_program` (context, comp, text, language, use_shared=False)

Return 0 on success, 1 otherwise.

`SCons.Conftest._lang2suffix` (lang)

Convert a language name to a suffix. When “lang” is empty or None C is assumed. Returns a tuple (lang, suffix, None) when it works. For an unrecognized language returns (None, None, msg).

Where:

- lang = the unified language name
- suffix = the suffix, including the leading dot
- msg = an error message

SCons.Debug module

`SCons.Debug`

Code for debugging SCons internal things. Shouldn’t be needed by most users. Quick shortcuts:

```
from SCons.Debug import caller_trace caller_trace()
```

`SCons.Debug.Trace` (msg, filename=None, mode='w', tstamp=False)

Write a trace message.

Write messages when debugging which do not interfere with stdout. Useful in tests, which monitor stdout and would break with unexpected output. Trace messages can go to the console (which is opened as a file), or to a disk file; the file argument persists across calls unless overridden.

Parameters:

- **filename** – file to write trace message to. If omitted, write to the previous trace file (default: console).
- **mode** – file open mode (default: ‘w’)
- **tstamp** – write relative timestamps with trace. Outputs time since scon was started, and time since last trace (default: False)

`SCons.Debug._dump_one_caller` (key, file, level=0)

`SCons.Debug.caller_stack` ()

`SCons.Debug.caller_trace` (back=0)

Trace caller stack and save info into global dicts, which are printed automatically at the end of SCons execution.

`SCons.Debug.countLoggedInstances` (classes, file=<_io.TextIOWrapper name='<stdout>' mode='w' encoding='utf-8'>)

```

SCons.Debug.dumpLoggedInstances (classes, file=<_io.TextIOWrapper name='<stdout>'
mode='w' encoding='utf-8'>)
SCons.Debug.dump_caller_counts (file=<_io.TextIOWrapper name='<stdout>' mode='w'
encoding='utf-8'>)
SCons.Debug.fetchLoggedInstances (classes='*')
SCons.Debug.func_shorten (func_tuple)
SCons.Debug.listLoggedInstances (classes, file=<_io.TextIOWrapper name='<stdout>'
mode='w' encoding='utf-8'>)
SCons.Debug.logInstanceCreation (instance, name=None)
SCons.Debug.memory ()
SCons.Debug.string_to_classes (s)

```

SCons.Defaults module

SCons.Defaults

Builders and other things for the local site. Here's where we'll duplicate the functionality of autoconf until we move it into the installation procedure or use something like qmconf.

The code that reads the registry to find MSVC components was borrowed from distutils.msvccompiler.

```

SCons.Defaults.DefaultEnvironment (*args, **kw)
  Initial public entry point for creating the default construction Environment.
  After creating the environment, we overwrite our name (DefaultEnvironment) with the
  _fetch_DefaultEnvironment() function, which more efficiently returns the initialized
  default construction environment without checking for its existence.
  (This function still exists with its _default_check because someone else (cough
  Script/__init__.py cough) may keep a reference to this function. So we can't use
  the fully functional idiom of having the name originally be a something that
  only creates the construction environment and then overwrites the name.)

```

```

class SCons.Defaults.NullCmdGenerator (cmd)
  Bases: object
  This is a callable class that can be used in place of other command generators if
  you don't want them to do anything.
  The __call__ method for this class simply returns the thing you instantiated it
  with.
  Example usage: env["DO_NOTHING"] = NullCmdGenerator env["LINKCOM"] =
  "${DO_NOTHING('$LINK $SOURCES $TARGET')}"

```

```

SCons.Defaults.SharedFlagChecker (source, target, env)
SCons.Defaults.SharedObjectEmitter (target, source, env)
SCons.Defaults.StaticObjectEmitter (target, source, env)

```

```

class SCons.Defaults.Variable_Method_Caller (variable, method)
  Bases: object
  A class for finding a construction variable on the stack and calling one of its
  methods.
  We use this to support "construction variables" in our string eval()s that
  actually stand in for methods—specifically, use of "RDirs" in call to
  _concat that should actually execute the "TARGET.RDirs" method. (We used to
  support this by creating a little "build dictionary" that mapped RDirs to the
  method, but this got in the way of Memoizing construction environments,
  because we had to create new environment objects to hold the variables.)

```

```

SCons.Defaults.__libversionflags (env, version_var, flags_var)
SCons.Defaults._concat (prefix, list, suffix, env, f=<function <lambda>>,
source=None)
  Creates a new list from 'list' by first interpolating each element in the
  list using the 'env' dictionary and then calling f on the list, and finally
  calling _concat_ixes to concatenate 'prefix' and 'suffix' onto each element
  of the list.
SCons.Defaults._concat_ixes (prefix, list, suffix, env)

```

Creates a new list from 'list' by concatenating the 'prefix' and 'suffix' arguments onto each element of the list. A trailing space on 'prefix' or leading space on 'suffix' will cause them to be put into separate list elements rather than being concatenated.

`SCons.Defaults._defines` (prefix, defs, suffix, env, c=<function _concat_ixes>)
 A wrapper around `_concat_ixes` that turns a list or string into a list of C preprocessor command-line definitions.

`SCons.Defaults._fetch_DefaultEnvironment` (*args, **kw)
 Returns the already-created default construction environment.

`SCons.Defaults._stripixes` (prefix, itms, suffix, stripprefixes, stripsuffixes, env, c=None)
 This is a wrapper around `_concat()/_concat_ixes()` that checks for the existence of prefixes or suffixes on list items and strips them where it finds them. This is used by tools (like the GNU linker) that need to turn something like 'libfoo.a' into '-lfoo'.

`SCons.Defaults.chmod_func` (dest, mode)

`SCons.Defaults.chmod_strfunc` (dest, mode)

`SCons.Defaults.copy_func` (dest, src, symlinks=True)
 If `symlinks` (is true), then a symbolic link will be shallow copied and recreated as a symbolic link; otherwise, copying a symbolic link will be equivalent to copying the symbolic link's final target regardless of symbolic link depth.

`SCons.Defaults.delete_func` (dest, must_exist=0)

`SCons.Defaults.delete_strfunc` (dest, must_exist=0)

`SCons.Defaults.get_paths_str` (dest)

`SCons.Defaults.mkdir_func` (dest)

`SCons.Defaults.move_func` (dest, src)

`SCons.Defaults.processDefines` (defs)
 process defines, resolving strings, lists, dictionaries, into a list of strings

`SCons.Defaults.touch_func` (dest)

SCons.Environment module

`SCons.Environment`

Base class for construction Environments. These are the primary objects used to communicate dependency and construction information to the build engine.

Keyword arguments supplied when the construction Environment is created are construction variables used to initialize the Environment

`class SCons.Environment.Base` (platform=None, tools=None, toolpath=None, variables=None, parse_flags=None, **kw)

Bases: `SCons.Environment.SubstitutionEnvironment`

Base class for "real" construction Environments.

These are the primary objects used to communicate dependency and construction information to the build engine. Keyword arguments supplied when the construction Environment is created are construction variables used to initialize the Environment.

`Action` (*args, **kw)

`AddMethod` (function, name=None)

Adds the specified function as a method of this construction environment with the specified name. If the name is omitted, the default name is the name of the function itself.

`AddPostAction` (files, action)

`AddPreAction` (files, action)

`Alias` (target, source=[], action=None, **kw)

AlwaysBuild (*targets)

Append (**kw)

Append values to existing construction variables in an Environment.

AppendENVPPath (name, newpath, envname='ENV', sep=':', delete_existing=0)

Append path elements to the path 'name' in the 'ENV' dictionary for this environment. Will only add any particular path once, and will normpath and normcase all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If delete_existing is 0, a newpath which is already in the path will not be moved to the end (it will be left where it is).

AppendUnique (delete_existing=0, **kw)

Append values to existing construction variables in an Environment, if they're not already there. If delete_existing is 1, removes existing values first, so values move to end.

Builder (**kw)

CacheDir (path)

Clean (targets, files)

Clone (tools=[], toolpath=None, parse_flags=None, **kw)

Return a copy of a construction Environment.

The copy is like a Python "deep copy"—that is, independent copies are made recursively of each objects—except that a reference is copied when an object is not deep-copyable (like a function). There are no references to any mutable objects in the original Environment.

Command (target, source, action, **kw)

Builds the supplied target files from the supplied source files using the supplied action. Action may be any type that the Builder constructor will accept for an action.

Configure (*args, **kw)

Decider (function)

Depends (target, dependency)

Explicitly specify that 'target's depend on 'dependency'.

Detect (progs)

Return the first available program from one or more possibilities.

Parameters: **progs** (*str or list*) – one or more command names to check for

Dictionary (*args)

Return construction variables from an environment.

Parameters: ***args** (*optional*) – variable names to look up

Returns: If *args* omitted, the dictionary of all construction variables. If one arg, the corresponding value is returned. If more than one arg, a list of values is returned.

Raises: **KeyError** – if any of *args* is not in the construction environment.

Dir (name, *args, **kw)

Dump (key=None, format='pretty')

Return construction variables serialized to a string.

Parameters:

- **key** (*optional*) – if None, format the whole dict of variables. Else format the value of *key* (Default value = None)
- **format** (*str, optional*) – specify the format to serialize to. “pretty” generates a pretty-printed string, “json” a JSON-formatted string. (Default value = “pretty”)

Entry (name, *args, **kw)

Environment (**kw)

Execute (action, *args, **kw)

Directly execute an action through an Environment

File (name, *args, **kw)

FindFile (file, dirs)

FindInstalledFiles ()

returns the list of all targets of the Install and InstallAs Builder.

FindIdxes (paths, prefix, suffix)

Search a list of paths for something that matches the prefix and suffix.

Parameters:

- **paths** – the list of paths or nodes.
- **prefix** – construction variable for the prefix.
- **suffix** – construction variable for the suffix.

Returns: the matched path or None

FindSourceFiles (node=' . ')

returns a list of all source files.

Flatten (sequence)

GetBuildPath (files)

Glob (pattern, ondisk=True, source=False, strings=False, exclude=None)

Ignore (target, dependency)

Ignore a dependency.

Literal (string)

Local (*targets)

MergeFlags (args, unique=1, dict=None)

Merge the dict in args into the construction variables of this env, or the passed-in dict. If args is not a dict, it is converted into a dict using ParseFlags. If unique is not set, the flags are appended rather than merged.

NoCache (*targets)

Tags a target so that it will not be cached

NoClean (*targets)

Tags a target so that it will not be cleaned by -c

Override (overrides)

Produce a modified environment whose variables are overridden by the overrides dictionaries. “overrides” is a dictionary that will override the variables of this environment.

This function is much more efficient than Clone() or creating a new Environment because it doesn't copy the construction environment dictionary, it just wraps the underlying construction environment, and doesn't even create a wrapper object if there are no overrides.

ParseConfig (command, function=None, unique=1)

Use the specified function to parse the output of the command in order to modify the current environment. The 'command' can be a string or a list of strings representing a command and its arguments. 'Function' is an optional argument that takes the environment, the output of the command, and the unique flag. If no function is specified, MergeFlags, which treats the output as the result of a typical 'X-config' command (i.e. gtk-config), will merge the output into the appropriate variables.

ParseDepends (filename, must_exist=None, only_one=0)

Parse a mkdep-style file for explicit dependencies. This is completely abusable, and should be unnecessary in the "normal" case of proper SCons configuration, but it may help make the transition from a Make hierarchy easier for some people to swallow. It can also be genuinely useful when using a tool that can write a .d file, but for which writing a scanner would be too complicated.

ParseFlags (*flags)

Parse the set of flags and return a dict with the flags placed in the appropriate entry. The flags are treated as a typical set of command-line flags for a GNU-like toolchain and used to populate the entries in the dict immediately below. If one of the flag strings begins with a bang (exclamation mark), it is assumed to be a command and the rest of the string is executed; the result of that evaluation is then added to the dict.

Platform (platform)

Precious (*targets)

Prepend (**kw)

Prepend values to existing construction variables in an Environment.

PrependENVPath (name, newpath, envname='ENV', sep=':', delete_existing=1)

Prepend path elements to the path 'name' in the 'ENV' dictionary for this environment. Will only add any particular path once, and will normpath and normcase all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If delete_existing is 0, a newpath which is already in the path will not be moved to the front (it will be left where it is).

PrependUnique (delete_existing=0, **kw)

Prepend values to existing construction variables in an Environment, if they're not already there. If delete_existing is 1, removes existing values first, so values move to front.

Pseudo (*targets)

PyPackageDir (modulename)

RemoveMethod (function)

Removes the specified function's MethodWrapper from the added_methods list, so we don't re-bind it when making a clone.

Replace (**kw)

Replace existing construction variables in an Environment with new construction variables and/or values.

ReplaceIxes (path, old_prefix, old_suffix, new_prefix, new_suffix)

Replace old_prefix with new_prefix and old_suffix with new_suffix.

env - Environment used to interpolate variables. path - the path that will be modified. old_prefix - construction variable for the old prefix. old_suffix - construction variable for the old suffix. new_prefix - construction variable for the new prefix. new_suffix - construction variable for the new suffix.

Repository (*dirs, **kw)

Requires (target, prerequisite)

Specify that 'prerequisite' must be built before 'target', (but 'target' does not actually depend on 'prerequisite' and need not be rebuilt if it changes).

SConsignFile (name=' .sconsign', dbm_module=None)

Scanner (*args, **kw)

SetDefault (**kw)

SideEffect (side_effect, target)

Tell scons that side_effects are built as side effects of building targets.

Split (arg)

This function converts a string or list into a list of strings or Nodes. This makes things easier for users by allowing files to be specified as a white-space separated list to be split.

The input rules are:

- A single string containing names separated by spaces. These will be split apart at the spaces.
 - A single Node instance
 - A list containing either strings or Node instances. Any strings in the list are not split at spaces.
- In all cases, the function returns a list of Nodes and strings.

Tool (tool, toolpath=None, **kw)

Value (value, built_value=None, name=None)

VariantDir (variant_dir, src_dir, duplicate=1)

WhereIs (prog, path=None, pathext=None, reject=[])

Find prog in the path.

_canonicalize (path)

_changed_build (dependency, target, prev_ni, repo_node=None)

_changed_content (dependency, target, prev_ni, repo_node=None)

_changed_source (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_match (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_newer (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_then_content (dependency, target, prev_ni, repo_node=None)

_copy2_from_cache (src, dst)

_copy_from_cache (src, dst)

_find_toolpath_dir (tp)

_gsm ()

_init_special ()

Initial the dispatch tables for special handling of special construction variables.

_update (other)

Private method to update an environment's consvar dict directly.
Bypasses the normal checks that occur when users try to set items.

_update_onlynew (*other*)

Private method to add new items to an environment's consvar dict.

Only adds items from *other* whose keys do not already appear in the existing dict; values from *other* are not used for replacement. Bypasses the normal checks that occur when users try to set items.

arg2nodes (*args*, *node_factory*=<class 'SCons.Environment._Null'>, *lookup_list*=<class 'SCons.Environment._Null'>, ***kw*)

backtick (*command*)**get** (*key*, *default*=None)

Emulates the get() method of dictionaries.

get_CacheDir ()**get_builder** (*name*)

Fetch the builder with the specified name from the environment.

get_factory (*factory*, *default*='File')

Return a factory function for creating Nodes for this construction environment.

get_scanner (*skey*)

Find the appropriate scanner given a key (usually a file suffix).

get_src_sig_type ()**get_tgt_sig_type** ()**gvars** ()**has_key** (*key*)

Emulates the has_key() method of dictionaries.

items ()

Emulates the items() method of dictionaries.

keys ()

Emulates the keys() method of dictionaries.

lvars ()**scanner_map_delete** (*kw*=None)

Delete the cached scanner map (if we need to).

subst (*string*, *raw*=0, *target*=None, *source*=None, *conv*=None, *executor*=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

subst_kw (*kw*, *raw*=0, *target*=None, *source*=None)**subst_list** (*string*, *raw*=0, *target*=None, *source*=None, *conv*=None, *executor*=None)

Calls through to SCons.Subst.scons_subst_list(). See the documentation for that function.

subst_path (*path*, *target*=None, *source*=None)

Substitute a path list, turning EntryProxies into Nodes and leaving Nodes (and other objects) as-is.

subst_target_source (*string*, *raw*=0, *target*=None, *source*=None, *conv*=None, *executor*=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial

underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

values ()

Emulates the values() method of dictionaries.

class SCons.Environment.BuilderDict (dict, env)

Bases: **collections.UserDict**

This is a dictionary-like class used by an Environment to hold the Builders. We need to do this because every time someone changes the Builders in the Environment's BUILDERS dictionary, we must update the Environment's attributes.

_MutableMapping__marker = <object object>

_abc_impl = <_abc_data object>

clear () → None. Remove all items from D.

copy ()

classmethod fromkeys (iterable, value=None)

get (k[, d]) → D[k] if k in D, else d. d defaults to None.

items () → a set-like object providing a view on D's items

keys () → a set-like object providing a view on D's keys

pop (k[, d]) → v, remove specified key and return the corresponding value.
If key is not found, d is returned if given, otherwise KeyError is raised.

popitem () → (k, v), remove and return some (key, value) pair
as a 2-tuple; but raise KeyError if D is empty.

setdefault (k[, d]) → D.get(k,d), also set D[k]=d if k not in D

update ([, E], **F) → None. Update D from mapping/iterable E and F.
If E present and has a .keys() method, does: for k in E: D[k] = E[k] If E present and lacks .keys() method, does:
for (k, v) in E: D[k] = v In either case, this is followed by: for k, v in F.items(): D[k] = v

values () → an object providing a view on D's values

class SCons.Environment.BuilderWrapper (object, method, name=None)

Bases: **SCons.Environment.MethodWrapper**

A MethodWrapper subclass that that associates an environment with a Builder.

This mainly exists to wrap the `__call__()` function so that all calls to Builders can have their argument lists massaged in the same way (treat a lone argument as the source, treat two arguments as target then source, make sure both target and source are lists) without having to have cut-and-paste code to do it.

As a bit of obsessive backwards compatibility, we also intercept attempts to get or set the "env" or "builder" attributes, which were the names we used before we put the common functionality into the MethodWrapper base class. We'll keep this around for a while in case people shipped Tool modules that reached into the wrapper (like the Tool/qt.py module does, or did). There shouldn't be a lot attribute fetching or setting on these, so a little extra work shouldn't hurt.

clone (new_object)

Returns an object that re-binds the underlying "method" to the specified new object.

class SCons.Environment.MethodWrapper (object, method, name=None)

Bases: **object**

A generic Wrapper class that associates a method (which can actually be any callable) with an object. As part of creating this MethodWrapper object an attribute with the specified (by default, the name of the supplied method) is

added to the underlying object. When that new “method” is called, our `__call__()` method adds the object as the first argument, simulating the Python behavior of supplying “self” on method calls.

We hang on to the name by which the method was added to the underlying base class so that we can provide a method to “clone” ourselves onto a new underlying object being copied (without which we wouldn’t need to save that info).

clone (*new_object*)

Returns an object that re-binds the underlying “method” to the specified new object.

`SCons.Environment.NoSubstitutionProxy` (*subject*)

An entry point for returning a proxy subclass instance that overrides the `subst*()` methods so they don’t actually perform construction variable substitution. This is specifically intended to be the shim layer in between global function calls (which don’t want construction variable substitution) and the `DefaultEnvironment()` (which would substitute variables if left to its own devices).

We have to wrap this in a function that allows us to delay definition of the class until it’s necessary, so that when it subclasses `Environment` it will pick up whatever `Environment` subclass the wrapper interface might have assigned to `SCons.Environment.Environment`.

`class SCons.Environment.OverrideEnvironment` (*subject*, *overrides=None*)

Bases: `SCons.Environment.Base`

A proxy that overrides variables in a wrapped construction environment by returning values from an overrides dictionary in preference to values from the underlying subject environment.

This is a lightweight (I hope) proxy that passes through most use of attributes to the underlying `Environment.Base` class, but has just enough additional methods defined to act like a real construction environment with overridden values. It can wrap either a `Base` construction environment, or another `OverrideEnvironment`, which can in turn nest arbitrary `OverrideEnvironments`...

Note that we do *not* call the underlying base class (`SubstitutionEnvironment`) initialization, because we get most of those from proxying the attributes of the subject construction environment. But because we subclass `SubstitutionEnvironment`, this class also has inherited `arg2nodes()` and `subst*()` methods; those methods can’t be proxied because they need *this* object’s methods to fetch the values from the overrides dictionary.

Action (**args*, ***kw*)

AddMethod (*function*, *name=None*)

Adds the specified function as a method of this construction environment with the specified name. If the name is omitted, the default name is the name of the function itself.

AddPostAction (*files*, *action*)

AddPreAction (*files*, *action*)

Alias (*target*, *source=[]*, *action=None*, ***kw*)

AlwaysBuild (**targets*)

Append (***kw*)

Append values to existing construction variables in an `Environment`.

AppendENVPPath (*name*, *newpath*, *envname='ENV'*, *sep=':'*, *delete_existing=0*)

Append path elements to the path ‘name’ in the ‘ENV’ dictionary for this environment. Will only add any particular path once, and will `normpath` and `normcase` all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If `delete_existing` is 0, a `newpath` which is already in the path will not be moved to the end (it will be left where it is).

AppendUnique (*delete_existing=0*, ***kw*)

Append values to existing construction variables in an `Environment`, if they’re not already there. If `delete_existing` is 1, removes existing values first, so values move to end.

Builder (***kw*)

CacheDir (path)

Clean (targets, files)

Clone (tools=[], toolpath=None, parse_flags=None, **kw)

Return a copy of a construction Environment.

The copy is like a Python “deep copy”—that is, independent copies are made recursively of each objects—except that a reference is copied when an object is not deep-copyable (like a function). There are no references to any mutable objects in the original Environment.

Command (target, source, action, **kw)

Builds the supplied target files from the supplied source files using the supplied action. Action may be any type that the Builder constructor will accept for an action.

Configure (*args, **kw)

Decider (function)

Depends (target, dependency)

Explicitly specify that ‘target’s depend on ‘dependency’.

Detect (progs)

Return the first available program from one or more possibilities.

Parameters: **progs** (*str or list*) – one or more command names to check for

Dictionary ()

Return construction variables from an environment.

Parameters: ***args** (*optional*) – variable names to look up

Returns: If *args* omitted, the dictionary of all construction variables. If one arg, the corresponding value is returned. If more than one arg, a list of values is returned.

Raises: **KeyError** – if any of *args* is not in the construction environment.

Dir (name, *args, **kw)

Dump (key=None, format='pretty')

Return construction variables serialized to a string.

Parameters:

- **key** (*optional*) – if None, format the whole dict of variables. Else format the value of *key* (Default value = None)
- **format** (*str, optional*) – specify the format to serialize to. “*pretty*” generates a pretty-printed string, “*json*” a JSON-formatted string. (Default value = “*pretty*”)

Entry (name, *args, **kw)

Environment (**kw)

Execute (action, *args, **kw)

Directly execute an action through an Environment

File (name, *args, **kw)

FindFile (file, dirs)

FindInstalledFiles ()

returns the list of all targets of the Install and InstallAs Builder.

FindIxes (paths, prefix, suffix)

Search a list of paths for something that matches the prefix and suffix.

Parameters:

- **paths** – the list of paths or nodes.
- **prefix** – construction variable for the prefix.
- **suffix** – construction variable for the suffix.

Returns: the matched path or None

FindSourceFiles (node= '.')
returns a list of all source files.

Flatten (sequence)

GetBuildPath (files)

Glob (pattern, ondisk=True, source=False, strings=False, exclude=None)

Ignore (target, dependency)
Ignore a dependency.

Literal (string)

Local (*targets)

MergeFlags (args, unique=1, dict=None)

Merge the dict in args into the construction variables of this env, or the passed-in dict. If args is not a dict, it is converted into a dict using ParseFlags. If unique is not set, the flags are appended rather than merged.

NoCache (*targets)
Tags a target so that it will not be cached

NoClean (*targets)
Tags a target so that it will not be cleaned by -c

Override (overrides)
Produce a modified environment whose variables are overridden by the overrides dictionaries. "overrides" is a dictionary that will override the variables of this environment.
This function is much more efficient than Clone() or creating a new Environment because it doesn't copy the construction environment dictionary, it just wraps the underlying construction environment, and doesn't even create a wrapper object if there are no overrides.

ParseConfig (command, function=None, unique=1)
Use the specified function to parse the output of the command in order to modify the current environment. The 'command' can be a string or a list of strings representing a command and its arguments. 'Function' is an optional argument that takes the environment, the output of the command, and the unique flag. If no function is specified, MergeFlags, which treats the output as the result of a typical 'X-config' command (i.e. gtk-config), will merge the output into the appropriate variables.

ParseDepends (filename, must_exist=None, only_one=0)
Parse a mkdep-style file for explicit dependencies. This is completely abusable, and should be unnecessary in the "normal" case of proper SCons configuration, but it may help make the transition from a Make hierarchy easier for some people to swallow. It can also be genuinely useful when using a tool that can write a .d file, but for which writing a scanner would be too complicated.

ParseFlags (*flags)
Parse the set of flags and return a dict with the flags placed in the appropriate entry. The flags are treated as a typical set of command-line flags for a GNU-like toolchain and used to populate the entries in the dict immediately below. If one of the flag strings begins with a bang (exclamation mark), it is assumed to be a command and the rest of the string is executed; the result of that evaluation is then added to the dict.

Platform (platform)

Precious (*targets)

Prepend (**kw)

Prepend values to existing construction variables in an Environment.

PrependENVPath (name, newpath, envname='ENV', sep=':', delete_existing=1)

Prepend path elements to the path 'name' in the 'ENV' dictionary for this environment. Will only add any particular path once, and will normpath and normcase all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If delete_existing is 0, a newpath which is already in the path will not be moved to the front (it will be left where it is).

PrependUnique (delete_existing=0, **kw)

Prepend values to existing construction variables in an Environment, if they're not already there. If delete_existing is 1, removes existing values first, so values move to front.

Pseudo (*targets)

PyPackageDir (modulename)

RemoveMethod (function)

Removes the specified function's MethodWrapper from the added_methods list, so we don't re-bind it when making a clone.

Replace (**kw)

Replace existing construction variables in an Environment with new construction variables and/or values.

ReplaceIxes (path, old_prefix, old_suffix, new_prefix, new_suffix)

Replace old_prefix with new_prefix and old_suffix with new_suffix.

env - Environment used to interpolate variables. path - the path that will be modified. old_prefix - construction variable for the old prefix. old_suffix - construction variable for the old suffix. new_prefix - construction variable for the new prefix. new_suffix - construction variable for the new suffix.

Repository (*dirs, **kw)

Requires (target, prerequisite)

Specify that 'prerequisite' must be built before 'target', (but 'target' does not actually depend on 'prerequisite' and need not be rebuilt if it changes).

SConsignFile (name='.sconsign', dbm_module=None)

Scanner (*args, **kw)

SetDefault (**kw)

SideEffect (side_effect, target)

Tell scons that side_effects are built as side effects of building targets.

Split (arg)

This function converts a string or list into a list of strings or Nodes. This makes things easier for users by allowing files to be specified as a white-space separated list to be split.

The input rules are:

- A single string containing names separated by spaces. These will be split apart at the spaces.
- A single Node instance
- A list containing either strings or Node instances. Any strings in the list are not split at spaces.

In all cases, the function returns a list of Nodes and strings.

Tool (tool, toolpath=None, **kw)

Value (value, built_value=None, name=None)

VariantDir (variant_dir, src_dir, duplicate=1)

WhereIs (prog, path=None, pathext=None, reject=[])
Find prog in the path.

_canonicalize (path)

_changed_build (dependency, target, prev_ni, repo_node=None)

_changed_content (dependency, target, prev_ni, repo_node=None)

_changed_source (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_match (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_newer (dependency, target, prev_ni, repo_node=None)

_changed_timestamp_then_content (dependency, target, prev_ni, repo_node=None)

_copy2_from_cache (src, dst)

_copy_from_cache (src, dst)

_find_toolpath_dir (tp)

_gsm ()

_init_special ()

Initial the dispatch tables for special handling of special construction variables.

_update (other)

Private method to update an environment's consvar dict directly.
Bypasses the normal checks that occur when users try to set items.

_update_onlynew (other)

Private method to add new items to an environment's consvar dict.
Only adds items from *other* whose keys do not already appear in the existing dict; values from *other* are not used for replacement. Bypasses the normal checks that occur when users try to set items.

arg2nodes (args, node_factory=<class 'SCons.Environment._Null'>, lookup_list=<class 'SCons.Environment._Null'>, **kw)

backtick (command)

get (key, default=None)

Emulates the get() method of dictionaries.

get_CacheDir ()

get_builder (name)

Fetch the builder with the specified name from the environment.

get_factory (factory, default='File')

Return a factory function for creating Nodes for this construction environment.

get_scanner (skey)

Find the appropriate scanner given a key (usually a file suffix).

get_src_sig_type ()

get_tgt_sig_type ()

gvars ()

has_key (key)

Emulates the has_key() method of dictionaries.

items ()

Emulates the items() method of dictionaries.

keys ()

Emulates the keys() method of dictionaries.

lvars ()

scanner_map_delete (kw=None)

Delete the cached scanner map (if we need to).

subst (string, raw=0, target=None, source=None, conv=None, executor=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

subst_kw (kw, raw=0, target=None, source=None)

subst_list (string, raw=0, target=None, source=None, conv=None, executor=None)

Calls through to SCons.Subst.scons_subst_list(). See the documentation for that function.

subst_path (path, target=None, source=None)

Substitute a path list, turning EntryProxies into Nodes and leaving Nodes (and other objects) as-is.

subst_target_source (string, raw=0, target=None, source=None, conv=None, executor=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

values ()

Emulates the values() method of dictionaries.

class SCons.Environment.SubstitutionEnvironment (kw)**

Bases: **object**

Base class for different flavors of construction environments.

This class contains a minimal set of methods that handle construction variable expansion and conversion of strings to Nodes, which may or may not be actually useful as a stand-alone class. Which methods ended up in this class is pretty arbitrary right now. They're basically the ones which we've empirically determined are common to the different construction environment subclasses, and most of the others that use or touch the underlying dictionary of construction variables.

Eventually, this class should contain all the methods that we determine are necessary for a "minimal" interface to the build engine. A full "native Python" SCons environment has gotten pretty heavyweight with all of the methods and Tools and construction variables we've jammed in there, so it would be nice to have a lighter weight alternative for interfaces that don't need all of the bells and whistles. (At some point, we'll also probably rename this class "Base," since that more reflects what we want this class to become, but because we've released comments that tell people to subclass Environment.Base to create their own flavors of construction environment, we'll save that for a future refactoring when this class actually becomes useful.)

AddMethod (function, name=None)

Adds the specified function as a method of this construction environment with the specified name. If the name is omitted, the default name is the name of the function itself.

MergeFlags (args, unique=1, dict=None)

Merge the dict in args into the construction variables of this env, or the passed-in dict. If args is not a dict, it is converted into a dict using ParseFlags. If unique is not set, the flags are appended rather than merged.

Override (overrides)

Produce a modified environment whose variables are overridden by the overrides dictionaries. "overrides" is a dictionary that will override the variables of this environment.

This function is much more efficient than Clone() or creating a new Environment because it doesn't copy the construction environment dictionary, it just wraps the underlying construction environment, and doesn't even create a wrapper object if there are no overrides.

ParseFlags (*flags)

Parse the set of flags and return a dict with the flags placed in the appropriate entry. The flags are treated as a typical set of command-line flags for a GNU-like toolchain and used to populate the entries in the dict immediately below. If one of the flag strings begins with a bang (exclamation mark), it is assumed to be a command and the rest of the string is executed; the result of that evaluation is then added to the dict.

RemoveMethod (function)

Removes the specified function's MethodWrapper from the added_methods list, so we don't re-bind it when making a clone.

_init_special ()

Initial the dispatch tables for special handling of special construction variables.

arg2nodes (args, node_factory=<class 'SCons.Environment._Null'>, lookup_list=<class 'SCons.Environment._Null'>, **kw)

backtick (command)**get** (key, default=None)

Emulates the get() method of dictionaries.

gvars ()**has_key** (key)

Emulates the has_key() method of dictionaries.

items ()

Emulates the items() method of dictionaries.

keys ()

Emulates the keys() method of dictionaries.

lvars ()**subst** (string, raw=0, target=None, source=None, conv=None, executor=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

subst_kw (kw, raw=0, target=None, source=None)**subst_list** (string, raw=0, target=None, source=None, conv=None, executor=None)

Calls through to SCons.Subst.scons_subst_list(). See the documentation for that function.

subst_path (path, target=None, source=None)

Substitute a path list, turning EntryProxies into Nodes and leaving Nodes (and other objects) as-is.

subst_target_source (string, raw=0, target=None, source=None, conv=None, executor=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

values ()

Emulates the values() method of dictionaries.

`class SCons.Environment._Null`

Bases: `object`

`SCons.Environment._del_SCANNERS (env, key)`

`SCons.Environment._delete_duplicates (l, keep_last)`

Delete duplicates from a sequence, keeping the first or last.

`SCons.Environment._null`

alias of `SCons.Environment._Null`

`SCons.Environment._set_BUILDERS (env, key, value)`

`SCons.Environment._set_SCANNERS (env, key, value)`

`SCons.Environment._set_future_reserved (env, key, value)`

`SCons.Environment._set_reserved (env, key, value)`

`SCons.Environment.alias_builder (env, target, source)`

`SCons.Environment.apply_tools (env, tools, toolpath)`

`SCons.Environment.copy_non_reserved_keywords (dict)`

`SCons.Environment.default_copy_from_cache (src, dst)`

`SCons.Environment.default_decide_source (dependency, target, prev_ni, repo_node=None)`

`SCons.Environment.default_decide_target (dependency, target, prev_ni, repo_node=None)`

`SCons.Environment.is_valid_construction_var (varstr)`

Return if the specified string is a legitimate construction variable.

SCons.Errors module

SCons.Errors

This file contains the exception classes used to handle internal and user errors in SCons.

exception `SCons.Errors.BuildError (node=None, errstr='Unknown error', status=2, exitstatus=2, filename=None, executor=None, action=None, command=None, exc_info=(None, None, None))`

Bases: `Exception`

SCons Errors that can occur while building.

Information about the cause of the build error

errstr

a description of the error message

status

the return code of the action that caused the build error. Must be set to a non-zero value even if the build error is not due to an action returning a non-zero returned code.

exitstatus

SCons exit status due to this build error. Must be nonzero unless due to an explicit `Exit()` call. Not always the same as `status`, since actions return a status code that should be respected, but SCons typically exits with 2 irrespective of the return value of the failed action.

filename

The name of the file or directory that caused the build error. Set to None if no files are associated with this error. This might be different from the target being built. For example, failure to create the directory in which the target file will appear. It can be None if the error is not due to a particular filename.

exc_info

Info about exception that caused the build error. Set to (None, None, None) if this build error is not due to an exception.

Information about the what caused the build error**node**

the error occurred while building this target node(s)

executor

the executor that caused the build to fail (might be None if the build failures is not due to the executor failing)

action

the action that caused the build to fail (might be None if the build failures is not due to the an action failure)

command

the command line for the action that caused the build to fail (might be None if the build failures is not due to the an action failure)

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Errors.**ExplicitExit** (node=None, status=None, *args)

Bases: **Exception**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Errors.**InternalError**

Bases: **Exception**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Errors.**MSVCError**

Bases: **OSError**

args**characters_written****errno**

POSIX exception code

filename

exception filename

filename2

second exception filename

strerror
exception `strerror`

with_traceback ()
Exception.`with_traceback(tb)` – set `self.__traceback__` to `tb` and return `self`.

exception `SCons.Errors.SConsEnvironmentError`
Bases: **Exception**

args

with_traceback ()
Exception.`with_traceback(tb)` – set `self.__traceback__` to `tb` and return `self`.

exception `SCons.Errors.StopError`
Bases: **Exception**

args

with_traceback ()
Exception.`with_traceback(tb)` – set `self.__traceback__` to `tb` and return `self`.

exception `SCons.Errors.UserError`
Bases: **Exception**

args

with_traceback ()
Exception.`with_traceback(tb)` – set `self.__traceback__` to `tb` and return `self`.

`SCons.Errors.convert_to_BuildError (status, exc_info=None)`
Convert a return code to a `BuildError` Exception.

The `buildError.status` we set here will normally be used as the exit status of the “scons” process.

Parameters:

- **status** – can either be a return code or an Exception.
- **exc_info** (*tuple, optional*) – explicit exception information.

SCons.Executor module

`SCons.Executor`

A module for executing actions with specific lists of target and source Nodes.

`SCons.Executor.AddBatchExecutor (key, executor)`

class `SCons.Executor.Batch (targets=[], sources=[])`
Bases: **object**

Remembers exact association between targets and sources of executor.

sources

targets

class `SCons.Executor.Executor (action, env=None, overridelist=[{}], targets=[], sources=[], builder_kw={})`
Bases: **object**

A class for controlling instances of executing an action.

This largely exists to hold a single association of an action, environment, list of environment override dictionaries, targets and sources for later processing as needed.

`_changed_sources_list`

```

_changed_targets_list

_do_execute

_execute_str

_get_changed_sources (*args, **kw)

_get_changed_targets (*args, **kw)

_get_changes ()

_get_source (*args, **kw)

_get_sources (*args, **kw)

_get_target (*args, **kw)

_get_targets (*args, **kw)

_get_unchanged_sources (*args, **kw)

_get_unchanged_targets (*args, **kw)

_get_unignored_sources_key (node, ignore=())

_memo

_unchanged_sources_list

_unchanged_targets_list

action_list

add_batch (targets, sources)
    Add pair of associated target and source to this Executor's list. This is necessary for "batch" Builders that can be
    called repeatedly to build up a list of matching target and source files that will be used in order to update multiple
    target files at once from multiple corresponding source files, for tools like MSVC that support it.

add_post_action (action)

add_pre_action (action)

add_sources (sources)
    Add source files to this Executor's list. This is necessary for "multi" Builders that can be called repeatedly to build
    up a source file list for a given target.

batches

builder_kw

cleanup ()

env

get_action_list ()

get_action_side_effects ()
    Returns all side effects for all batches of this Executor used by the underlying Action.

get_action_targets ()

```

get_all_children ()

Returns all unique children (dependencies) for all batches of this Executor.

The Taskmaster can recognize when it's already evaluated a Node, so we don't have to make this list unique for its intended canonical use case, but we expect there to be a lot of redundancy (long lists of batched .cc files #including the same .h files over and over), so removing the duplicates once up front should save the Taskmaster a lot of work.

get_all_prerequisites ()

Returns all unique (order-only) prerequisites for all batches of this Executor.

get_all_sources ()

Returns all sources for all batches of this Executor.

get_all_targets ()

Returns all targets for all batches of this Executor.

get_build_env ()

Fetch or create the appropriate build Environment for this Executor.

get_build_scanner_path (scanner)

Fetch the scanner path for this executor's targets and sources.

get_contents ()

Fetch the signature contents. This is the main reason this class exists, so we can compute this once and cache it regardless of how many target or source Nodes there are.

Returns bytes

get_implicit_deps ()

Return the executor's implicit dependencies, i.e. the nodes of the commands to be executed.

get_kw (kw= {})**get_lvars ()****get_sources ()****get_timestamp ()**

Fetch a time stamp for this Executor. We don't have one, of course (only files do), but this is the interface used by the timestamp module.

get_unignored_sources (node, ignore= ())**lvars****nullify ()****overridelist****post_actions****pre_actions****prepare ()**

Preparatory checks for whether this Executor can go ahead and (try to) build its targets.

scan (scanner, node_list)

Scan a list of this Executor's files (targets or sources) for implicit dependencies and update all of the targets with them. This essentially short-circuits an N*M scan of the sources for each individual target, which is a hell of a lot more efficient.

scan_sources (scanner)

`scan_targets (scanner)`

`set_action_list (action)`

`SCons.Executor.GetBatchExecutor (key)`

`class SCons.Executor.Null (*args, **kw)`

Bases: `object`

A null Executor, with a null build Environment, that does nothing when the rest of the methods call it.

This might be able to disappear when we refactor things to disassociate Builders from Nodes entirely, so we're not going to worry about unit tests for this—at least for now.

`_changed_sources_list`

`_changed_targets_list`

`_do_execute`

`_execute_str`

`_memo`

`_morph ()`

Morph this Null executor to a real Executor object.

`_unchanged_sources_list`

`_unchanged_targets_list`

`action_list`

`add_post_action (action)`

`add_pre_action (action)`

`batches`

`builder_kw`

`cleanup ()`

`env`

`get_action_list ()`

`get_action_side_effects ()`

`get_action_targets ()`

`get_all_children ()`

`get_all_prerequisites ()`

`get_all_sources ()`

`get_all_targets ()`

`get_build_env ()`

`get_build_scanner_path ()`

```

get_contents ()

get_unignored_sources (*args, **kw)

lvars

overridelist

post_actions

pre_actions

prepare ()

set_action_list (action)

```

```

class SCons.Executor.NullEnvironment (*args, **kwargs)
    Bases: SCons.Util.Null

```

```

scons = <module 'SCons' from '/Users/bdbaddog/devel/scons/git/dirk/SCons/__init__.py'>

_CacheDir = <SCons.CacheDir.CacheDir object>

_CacheDir_path = None

get_CacheDir ()

```

```

class SCons.Executor.TSList (func)

```

```

    Bases: collections.UserList

```

A class that implements \$TARGETS or \$SOURCES expansions by wrapping an executor Method. This class is used in the Executor.lvars() to delay creation of NodeList objects until they're needed.

Note that we subclass collections.UserList purely so that the is_Sequence() function will identify an object of this class as a list during variable expansion. We're not really using any collections.UserList methods in practice.

```

__UserList__cast (other)

__abc_impl = <_abc_data object>

append (item)
    S.append(value) – append value to the end of the sequence

clear () → None -- remove all items from S

copy ()

count (value) → integer -- return number of occurrences of value

extend (other)
    S.extend(iterable) – extend sequence by appending elements from the iterable

index (value[, start[, stop]]) → integer -- return first index of value.
    Raises ValueError if the value is not present.
    Supporting start and stop arguments is optional, but recommended.

insert (i, item)
    S.insert(index, value) – insert value before index

pop ([, index]) → item -- remove and return item at index (default last).
    Raise IndexError if list is empty or index is out of range.

remove (item)

```

`S.remove(value)` – remove first occurrence of value. Raise `ValueError` if the value is not present.

`reverse ()`

`S.reverse()` – reverse *IN PLACE*

`sort (*args, **kwargs)`

`class SCons.Executor.TSObject (func)`

Bases: `object`

A class that implements `$TARGET` or `$SOURCE` expansions by wrapping an Executor method.

`SCons.Executor.execute_action_list (obj, target, kw)`

Actually execute the action list.

`SCons.Executor.execute_actions_str (obj)`

`SCons.Executor.execute_nothing (obj, target, kw)`

`SCons.Executor.execute_null_str (obj)`

`SCons.Executor.get_NullEnvironment ()`

Use singleton pattern for Null Environments.

`SCons.Executor.rfile (node)`

A function to return the results of a Node's `rfile()` method, if it exists, and the Node itself otherwise (if it's a Value Node, e.g.).

SCons.Job module

SCons.Job

This module defines the Serial and Parallel classes that execute tasks to complete a build. The Jobs class provides a higher level interface to start, stop, and wait on jobs.

`class SCons.Job.InterruptState`

Bases: `object`

`set ()`

`class SCons.Job.Jobs (num, taskmaster)`

Bases: `object`

An instance of this class initializes N jobs, and provides methods for starting, stopping, and waiting on all N jobs.

`_reset_sig_handler ()`

Restore the signal handlers to their previous state (before the call to `_setup_sig_handler()`).

`_setup_sig_handler ()`

Setup an interrupt handler so that SCons can shutdown cleanly in various conditions:

- a. SIGINT: Keyboard interrupt
- b. SIGTERM: kill or system shutdown
- c. SIGHUP: Controlling shell exiting

We handle all of these cases by stopping the taskmaster. It turns out that it's very difficult to stop the build process by throwing asynchronously an exception such as `KeyboardInterrupt`. For example, the python Condition variables (`threading.Condition`) and queues do not seem to be asynchronous-exception-safe. It would require adding a whole bunch of try/finally block and except `KeyboardInterrupt` all over the place.

Note also that we have to be careful to handle the case when SCons forks before executing another process. In that case, we want the child to exit immediately.

`run (postfunc=<function Jobs.<lambda>>)`

Run the jobs.

postfunc() will be invoked after the jobs has run. It will be invoked even if the jobs are interrupted by a keyboard interrupt (well, in fact by a signal such as either SIGINT, SIGTERM or SIGHUP). The execution of postfunc() is protected against keyboard interrupts and is guaranteed to run to completion.

were_interrupted ()

Returns whether the jobs were interrupted by a signal.

class SCons.Job.**Parallel** (taskmaster, num, stack_size)

Bases: **object**

This class is used to execute tasks in parallel, and is somewhat less efficient than Serial, but is appropriate for parallel builds.

This class is thread safe.

start ()

Start the job. This will begin pulling tasks from the taskmaster and executing them, and return when there are no more tasks. If a task fails to execute (i.e. execute() raises an exception), then the job will stop.

class SCons.Job.**Serial** (taskmaster)

Bases: **object**

This class is used to execute tasks in series, and is more efficient than Parallel, but is only appropriate for non-parallel builds. Only one instance of this class should be in existence at a time.

This class is not thread safe.

start ()

Start the job. This will begin pulling tasks from the taskmaster and executing them, and return when there are no more tasks. If a task fails to execute (i.e. execute() raises an exception), then the job will stop.

class SCons.Job.**ThreadPool** (num, stack_size, interrupted)

Bases: **object**

This class is responsible for spawning and managing worker threads.

cleanup ()

Shuts down the thread pool, giving each worker thread a chance to shut down gracefully.

get ()

Remove and return a result tuple from the results queue.

preparation_failed (task)

put (task)

Put task into request queue.

class SCons.Job.**Worker** (requestQueue, resultsQueue, interrupted)

Bases: **threading.Thread**

A worker thread waits on a task to be posted to its request queue, dequeues the task, executes it, and posts a tuple including the task and a boolean indicating whether the task executed successfully.

_bootstrap ()

_bootstrap_inner ()

_delete ()

Remove current thread from the dict of currently running threads.

_exc_info ()

exc_info() -> (type, value, traceback)

Return information about the most recent exception caught by an except clause in the current stack frame or in an older stack frame.

_initialized = False

`_reset_internal_locks (is_alive)`

`_set_ident ()`

`_set_tstate_lock ()`

Set a lock object which will be released by the interpreter when the underlying thread state (see `pystate.h`) gets deleted.

`_stop ()`

`_wait_for_tstate_lock (block=True, timeout=-1)`

property daemon

A boolean value indicating whether this thread is a daemon thread.

This must be set before `start()` is called, otherwise `RuntimeError` is raised. Its initial value is inherited from the creating thread; the main thread is not a daemon thread and therefore all threads created in the main thread default to `daemon = False`.

The entire Python program exits when only daemon threads are left.

`getName ()`

property ident

Thread identifier of this thread or `None` if it has not been started.

This is a nonzero integer. See the `get_ident()` function. Thread identifiers may be recycled when a thread exits and another thread is created. The identifier is available even after the thread has exited.

`isAlive ()`

Return whether the thread is alive.

This method is deprecated, use `is_alive()` instead.

`isDaemon ()`

`is_alive ()`

Return whether the thread is alive.

This method returns `True` just before the `run()` method starts until just after the `run()` method terminates. The module function `enumerate()` returns a list of all alive threads.

`join (timeout=None)`

Wait until the thread terminates.

This blocks the calling thread until the thread whose `join()` method is called terminates – either normally or through an unhandled exception or until the optional timeout occurs.

When the timeout argument is present and not `None`, it should be a floating point number specifying a timeout for the operation in seconds (or fractions thereof). As `join()` always returns `None`, you must call `is_alive()` after `join()` to decide whether a timeout happened – if the thread is still alive, the `join()` call timed out.

When the timeout argument is not present or `None`, the operation will block until the thread terminates.

A thread can be `join()`ed many times.

`join()` raises a `RuntimeError` if an attempt is made to join the current thread as that would cause a deadlock. It is also an error to `join()` a thread before it has been started and attempts to do so raises the same exception.

property name

A string used for identification purposes only.

It has no semantics. Multiple threads may be given the same name. The initial name is set by the constructor.

`run ()`

Method representing the thread's activity.

You may override this method in a subclass. The standard `run()` method invokes the callable object passed to the object's constructor as the target argument, if any, with sequential and keyword arguments taken from the `args` and `kwargs` arguments, respectively.

`setDaemon (daemonic)`

setName (name)

start ()

Start the thread's activity.

It must be called at most once per thread object. It arranges for the object's run() method to be invoked in a separate thread of control.

This method will raise a RuntimeError if called more than once on the same thread object.

SCons.Memoize module

Memoizer

A decorator-based implementation to count hits and misses of the computed values that various methods cache in memory.

Use of this modules assumes that wrapped methods be coded to cache their values in a consistent way. In particular, it requires that the class uses a dictionary named “_memo” to store the cached values.

Here is an example of wrapping a method that returns a computed value, with no input parameters:

```
@SCons.Memoize.CountMethodCall
def foo(self):

    try:
        return self._memo['foo']
    except KeyError:
        pass

    result = self.compute_foo_value()

    self._memo['foo'] = result

    return result
```

Here is an example of wrapping a method that will return different values based on one or more input arguments:

```
def _bar_key(self, argument):
    return argument

@SCons.Memoize.CountDictCall(_bar_key)
def bar(self, argument):

    memo_key = argument
    try:
        memo_dict = self._memo['bar']
    except KeyError:
        memo_dict = {}
        self._memo['dict'] = memo_dict
    else:
        try:
            return memo_dict[memo_key]
        except KeyError:
            pass

    result = self.compute_bar_value(argument)

    memo_dict[memo_key] = result

    return result
```

Deciding what to cache is tricky, because different configurations can have radically different performance tradeoffs, and because the tradeoffs involved are often so non-obvious. Consequently, deciding whether or not to cache a given method will likely be more of an art than a science, but should still be based on available data from this

module. Here are some VERY GENERAL guidelines about deciding whether or not to cache return values from a method that's being called a lot:

– **The first question to ask is, “Can we change the calling code**

so this method isn't called so often?” Sometimes this can be done by changing the algorithm. Sometimes the *caller* should be memoized, not the method you're looking at.

The memoized function should be timed with multiple configurations to make sure it doesn't inadvertently slow down some other configuration.

– **When memoizing values based on a dictionary key composed of**

input arguments, you don't need to use all of the arguments if some of them don't affect the return values.

```
class SCons.Memoize.CountDict (cls_name, method_name, keymaker)
```

Bases: **SCons.Memoize.Counter**

A counter class for memoized values stored in a dictionary, with keys based on the method's input arguments.

A CountDict object is instantiated in a decorator for each of the class's methods that memoizes its return value in a dictionary, indexed by some key that can be computed from one or more of its input arguments.

count (*args, **kw)

Counts whether the computed key value is already present in the memoization dictionary (a hit) or not (a miss).

display ()

key ()

```
SCons.Memoize.CountDictCall (keyfunc)
```

Decorator for counting memoizer hits/misses while accessing dictionary values with a key-generating function.

Like CountMethodCall above, it wraps the given method fn and uses a CountDict object to keep track of the caching statistics. The dict-key function keyfunc has to get passed in the decorator call and gets stored in the CountDict instance. Wrapping gets enabled by calling EnableMemoization().

```
SCons.Memoize.CountMethodCall (fn)
```

Decorator for counting memoizer hits/misses while retrieving a simple value in a class method. It wraps the given method fn and uses a CountValue object to keep track of the caching statistics. Wrapping gets enabled by calling EnableMemoization().

```
class SCons.Memoize.CountValue (cls_name, method_name)
```

Bases: **SCons.Memoize.Counter**

A counter class for simple, atomic memoized values.

A CountValue object should be instantiated in a decorator for each of the class's methods that memoizes its return value by simply storing the return value in its `_memo` dictionary.

count (*args, **kw)

Counts whether the memoized value has already been set (a hit) or not (a miss).

display ()

key ()

```
class SCons.Memoize.Counter (cls_name, method_name)
```

Bases: **object**

Base class for counting memoization hits and misses.

We expect that the initialization in a matching decorator will fill in the correct class name and method name that represents the name of the function being counted.

display ()

key ()

```
SCons.Memoize.Dump (title=None)
```

Dump the hit/miss count for all the counters collected so far.

```
SCons.Memoize.EnableMemoization ()
```

SCons.PathList module

SCons.PathList

A module for handling lists of directory paths (the sort of things that get set as CPPPATH, LIBPATH, etc.) with as much caching of data and efficiency as we can, while still keeping the evaluation delayed so that we Do the Right Thing (almost) regardless of how the variable is specified.

SCons.PathList.**PathList** (pathlist)

Returns the cached `_PathList` object for the specified pathlist, creating and caching a new object as necessary.

`class` SCons.PathList.**_PathList** (pathlist)

Bases: **object**

An actual PathList object.

subst_path (env, target, source)

Performs construction variable substitution on a pre-digested PathList for a specific target and source.

SCons.PathList.**node_conv** (obj)

This is the "string conversion" routine that we have our substitutions use to return Nodes, not strings. This relies on the fact that an EntryProxy object has a `get()` method that returns the underlying Node that it wraps, which is a bit of architectural dependence that we might need to break or modify in the future in response to additional requirements.

SCons.SConf module

SCons.SConf

Autoconf-like configuration support.

In other words, SConf allows to run tests on the build machine to detect capabilities of system and do some things based on result: generate config files, header files for C/C++, update variables in environment.

Tests on the build system can detect if compiler sees header files, if libraries are installed, if some command line options are supported etc.

SCons.SConf.**CheckCC** (context)

SCons.SConf.**CheckCHHeader** (context, header, include_quotes='')

A test for a C header file.

SCons.SConf.**CheckCXX** (context)

SCons.SConf.**CheckCXXHeader** (context, header, include_quotes='')

A test for a C++ header file.

`class` SCons.SConf.**CheckContext** (sconf)

Bases: **object**

Provides a context for configure tests. Defines how a test writes to the screen and log file.

A typical test is just a callable with an instance of CheckContext as first argument:

```
def CheckCustom(context, ...):
```

```
    context.Message('Checking my weird test ... ') ret = myWeirdTestFunction(...) context.Result(ret)
```

Often, `myWeirdTestFunction` will be one of `context.TryCompile/context.TryLink/context.TryRun`. The results of those are cached, for they are only rebuild, if the dependencies have changed.

AppendLIBS (lib_name_list)

BuildProg (text, ext)

CompileProg (text, ext)

CompileSharedObject (text, ext)

Display (msg)

Log (*msg*)

Message (*text*)

Inform about what we are doing right now, e.g. 'Checking for SOMETHING ... '

PrependLIBS (*lib_name_list*)

Result (*res*)

Inform about the result of the test. If *res* is not a string, displays 'yes' or 'no' depending on whether *res* is evaluated as true or false. The result is only displayed when *self.did_show_result* is not set.

RunProg (*text*, *ext*)

SetLIBS (*val*)

TryAction (**args*, ***kw*)

TryBuild (**args*, ***kw*)

TryCompile (**args*, ***kw*)

TryLink (**args*, ***kw*)

TryRun (**args*, ***kw*)

SCons.SConf.**CheckDeclaration** (*context*, *declaration*, *includes*='', *language*=None)

SCons.SConf.**CheckFunc** (*context*, *function_name*, *header*=None, *language*=None)

SCons.SConf.**CheckHeader** (*context*, *header*, *include_quotes*='<>', *language*=None)

A test for a C or C++ header file.

SCons.SConf.**CheckLib** (*context*, *library*=None, *symbol*='main', *header*=None, *language*=None, *autoadd*=1)

A test for a library. See also *CheckLibWithHeader*. Note that *library* may also be None to test whether the given symbol compiles without flags.

SCons.SConf.**CheckLibWithHeader** (*context*, *libs*, *header*, *language*, *call*=None, *autoadd*=1)

Another (more sophisticated) test for a library. Checks, if *library* and *header* is available for *language* (may be 'C' or 'CXX'). *Call* maybe be a valid expression *_with_* a trailing ';'. As in *CheckLib*, we support *library*=None, to test if the call compiles without extra link flags.

SCons.SConf.**CheckProg** (*context*, *prog_name*)

Simple check if a program exists in the path. Returns the path for the application, or None if not found.

SCons.SConf.**CheckSHCC** (*context*)

SCons.SConf.**CheckSHCXX** (*context*)

SCons.SConf.**CheckType** (*context*, *type_name*, *includes*='', *language*=None)

SCons.SConf.**CheckTypeSize** (*context*, *type_name*, *includes*='', *language*=None, *expect*=None)

exception SCons.SConf.**ConfigureCacheError** (*target*)

Bases: *SCons.SConf.SConfError*

Raised when a use explicitly requested the cache feature, but the test is run the first time.

args

with_traceback ()

Exception.with_traceback(*tb*) – set *self.__traceback__* to *tb* and return *self*.

exception SCons.SConf.**ConfigureDryRunError** (*target*)

Bases: *SCons.SConf.SConfError*

Raised when a file or directory needs to be updated during a Configure process, but the user requested a dry-run

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

SCons.SConf.**CreateConfigHBuilder** (env)

Called if necessary just before the building targets phase begins.

SCons.SConf.**NeedConfigHBuilder** ()

SCons.SConf.**SConf** (*args, **kw)

```
class SCons.SConf.SConfBase (env, custom_tests={}, conf_dir='$CONFIGUREDIR',
log_file='$CONFIGURELOG', config_h=None, _depth=0)
```

Bases: **object**

This is simply a class to represent a configure context. After creating a SConf object, you can call any tests. After finished with your tests, be sure to call the Finish() method, which returns the modified environment. Some words about caching: In most cases, it is not necessary to cache Test results explicitly. Instead, we use the scons dependency checking mechanism. For example, if one wants to compile a test program (SConf.TryLink), the compiler is only called, if the program dependencies have changed. However, if the program could not be compiled in a former SConf run, we need to explicitly cache this error.

AddTest (test_name, test_instance)

Adds test_class to this SConf instance. It can be called with self.test_name(...)

AddTests (tests)

Adds all the tests given in the tests dictionary to this SConf instance

BuildNodes (nodes)

Tries to build the given nodes immediately. Returns 1 on success, 0 on error.

Define (name, value=None, comment=None)

Define a pre processor symbol name, with the optional given value in the current config header.

If value is None (default), then #define name is written. If value is not none, then #define name value is written. comment is a string which will be put as a C comment in the header, to explain the meaning of the value (appropriate C comments will be added automatically).

Finish ()

Call this method after finished with your tests: env = sconfs.Finish()

```
class TestWrapper (test, sconfs)
```

Bases: **object**

A wrapper around Tests (to ensure sanity)

TryAction (action, text=None, extension='')

Tries to execute the given action with optional source file contents <text> and optional source file extension <extension>, Returns the status (0 : failed, 1 : ok) and the contents of the output file.

TryBuild (builder, text=None, extension='')

Low level TryBuild implementation. Normally you don't need to call that - you can use TryCompile / TryLink / TryRun instead

TryCompile (text, extension)

Compiles the program given in text to an env.Object, using extension as file extension (e.g. '.c'). Returns 1, if compilation was successful, 0 otherwise. The target is saved in self.lastTarget (for further processing).

TryLink (text, extension)

Compiles the program given in text to an executable env.Program, using extension as file extension (e.g. '.c'). Returns 1, if compilation was successful, 0 otherwise. The target is saved in self.lastTarget (for further processing).

TryRun (text, extension)

Compiles and runs the program given in text, using extension as file extension (e.g. '.c'). Returns (1, outputStr) on success, (0, "") otherwise. The target (a file containing the program's stdout) is saved in self.lastTarget (for further processing).

_createDir (node)

_shutdown ()

Private method. Reset to non-piped spawn

_startup ()

Private method. Set up logstream, and set the environment variables necessary for a piped build

pspawn_wrapper (sh, escape, cmd, args, env)

Wrapper function for handling piped spawns.

This looks to the calling interface (in Action.py) like a "normal" spawn, but associates the call with the PSPAWN variable from the construction environment and with the streams to which we want the output logged. This gets slid into the construction environment as the SPAWN variable so Action.py doesn't have to know or care whether it's spawning a piped command or not.

class SCons.SConf.SConfBuildInfo

Bases: SCons.Node.FS.FileBuildInfo

Special build info for targets of configure tests. Additional members are result (did the builder succeed last time?) and string, which contains messages of the original build phase.

bact

bactsig

bdepends

bdependsigns

bimplicit

bimplicitsigns

bsources

bsourcesigns

convert_from_sconsign (dir, name)

Converts a newly-read FileBuildInfo object for in-SCons use

For normal up-to-date checking, we don't have any conversion to perform—but we're leaving this method here to make that clear.

convert_to_sconsign ()

Converts this FileBuildInfo object for writing to a .sconsign file

This replaces each Node in our various dependency lists with its usual string representation: relative to the top-level SConstruct directory, or an absolute path if it's outside.

current_version_id = 2

dependency_map

format (names=0)

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a '__dict__' slot is added, it should be updated instead of replaced.

prepare_dependencies ()

Prepares a FileBuildInfo object for explaining what changed

The bsources, bdepends and bimplicit lists have all been stored on disk as paths relative to the top-level SConstruct directory. Convert the strings to actual Nodes (for use by the `-debug=explain` code and `-implicit-cache`).

result

set_build_result (result, string)

string

class SCons.SConf.SConfBuildTask (tm, targets, top, node)

Bases: SCons.Taskmaster.AlwaysTask

This is almost the same as SCons.Script.BuildTask. Handles SConfErrors correctly and knows about the current cache_mode.

`_abc_impl = <_abc_data object>`

`_exception_raise ()`

Raises a pending exception that was recorded while getting a Task ready for execution.

`_no_exception_to_raise ()`

`collect_node_states ()`

`display (message)`

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

`display_cached_string (bi)`

Logs the original builder messages, given the SConfBuildInfo instance bi.

`exc_clear ()`

Clears any recorded exception.

This also changes the "exception_raise" attribute to point to the appropriate do-nothing method.

`exc_info ()`

Returns info about a recorded exception.

`exception_set (exception=None)`

Records an exception to be raised at the appropriate time.

This also changes the "exception_raise" attribute to point to the method that will, in fact

`execute ()`

Called to execute the task.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in prepare(), executed() or failed().

`executed ()`

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call "visited()", which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

`executed_with_callbacks ()`

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call "visited()", which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn't want to call the Node's callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the "scons -c" option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

needs_execute ()

Always returns True (indicating this Task should always be executed).

Subclasses that need this behavior (as opposed to the default of only executing Nodes that are out of date w.r.t. their dependencies) can use this as follows:

```
class MyTaskSubclass(SCons.Taskmaster.Task):
```

```
    needs_execute = SCons.Taskmaster.AlwaysTask.needs_execute
```

postprocess ()

Post-processes a task after it's been executed.

This examines all the targets just built (or not, we don't care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

trace_message (method, node, description='node')

exception `SCons.SConf.SConfError` (msg)

Bases: `SCons.Errors.UserError`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.SConf.SConfWarning`

Bases: `SCons.Warnings.Warning`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

`SCons.SConf.SetBuildType` (buildtype)

`SCons.SConf.SetCacheMode` (mode)

Set the Configure cache mode. mode must be one of “auto”, “force”, or “cache”.

`SCons.SConf.SetProgressDisplay` (display)

Set the progress display to use (called from `SCons.Script`)

class `SCons.SConf.Streamer` (orig)

Bases: `object`

‘Sniffer’ for a file-like writable object. Similar to the unix tool tee.

flush ()

getvalue ()

Return everything written to orig since the Streamer was created.

write (str)

writelines (lines)

`SCons.SConf._createConfigH` (target, source, env)

`SCons.SConf._createSource` (target, source, env)

`SCons.SConf._stringConfigH` (target, source, env)

`SCons.SConf._stringSource` (target, source, env)

`SCons.SConf.createIncludesFromHeaders` (headers, leaveLast, include_quotes='')

SCons.SConsign module

`SCons.SConsign`

Writing and reading information to the `.sconsign` file or files.

class `SCons.SConsign.Base`

Bases: `object`

This is the controlling class for the signatures for the collection of entries associated with a specific directory. The actual directory association will be maintained by a subclass that is specific to the underlying storage method. This class provides a common set of methods for fetching and storing the individual bits of information that make up signature entry.

`do_not_set_entry (filename, obj)`

`do_not_store_info (filename, node)`

`get_entry (filename)`

Fetch the specified entry attribute.

`merge ()`

`set_entry (filename, obj)`

Set the entry.

`store_info (filename, node)`

`class SCons.SConsign.DB (dir)`

Bases: `SCons.SConsign.Base`

A Base subclass that reads and writes signature information from a global `.sconsign.db*` file—the actual file suffix is determined by the database module.

`do_not_set_entry (filename, obj)`

`do_not_store_info (filename, node)`

`get_entry (filename)`

Fetch the specified entry attribute.

`merge ()`

`set_entry (filename, obj)`

Set the entry.

`store_info (filename, node)`

`write (sync=1)`

`class SCons.SConsign.Dir (fp=None, dir=None)`

Bases: `SCons.SConsign.Base`

`do_not_set_entry (filename, obj)`

`do_not_store_info (filename, node)`

`get_entry (filename)`

Fetch the specified entry attribute.

`merge ()`

`set_entry (filename, obj)`

Set the entry.

`store_info (filename, node)`

`class SCons.SConsign.DirFile (dir)`

Bases: `SCons.SConsign.Dir`

Encapsulates reading and writing a per-directory `.sconsign` file.

`do_not_set_entry (filename, obj)`

`do_not_store_info (filename, node)`

`get_entry (filename)`

Fetch the specified entry attribute.

merge ()

set_entry (filename, obj)
Set the entry.

store_info (filename, node)

write (sync=1)

Write the .sconsign file to disk.

Try to write to a temporary file first, and rename it if we succeed. If we can't write to the temporary file, it's probably because the directory isn't writable (and if so, how did we build anything in this directory, anyway?), so try to write directly to the .sconsign file as a backup. If we can't rename, try to copy the temporary contents back to the .sconsign file. Either way, always try to remove the temporary file at the end.

SCons.SConsign.File (name, dbm_module=None)

Arrange for all signatures to be stored in a global .sconsign.db* file.

SCons.SConsign.ForDirectory

alias of **SCons.SConsign.DB**

SCons.SConsign.Get_DataBase (dir)

SCons.SConsign.Reset ()

Reset global state. Used by unit tests that end up using SConsign multiple times to get a clean slate for each test.

class SCons.SConsign.SConsignEntry

Bases: **object**

Wrapper class for the generic entry in a .sconsign file. The Node subclass populates it with attributes as it pleases. XXX As coded below, we do expect a '.binfo' attribute to be added, but we'll probably generalize this in the next refactorings.

binfo

convert_from_sconsign (dir, name)

convert_to_sconsign ()

current_version_id = 2

ninfo

SCons.SConsign.corrupt_dblite_warning (filename)

SCons.SConsign.write ()

SCons.Subst module

SCons.Subst

SCons string substitution.

class SCons.Subst.CmdStringHolder (cmd, literal=None)

Bases: **collections.UserString**

This is a special class used to hold strings generated by `scons_subst()` and `scons_subst_list()`. It defines a special method `escape()`. When passed a function with an escape algorithm for a particular platform, it will return the contained string with the proper escape sequences inserted.

_abc_impl = <_abc_data object>

capitalize ()

casefold ()**center (width, *args)****count (value) → integer** -- return number of occurrences of value**encode (encoding=None, errors=None)****endswith (suffix, start=0, end=9223372036854775807)****escape (escape_func, quote_func=<function quote_spaces>)**

Escape the string with the supplied function. The function is expected to take an arbitrary string, then return it with all special characters escaped and ready for passing to the command interpreter.

After calling this function, the next call to `str()` will return the escaped string.

expandtabs (tabsize=8)**find (sub, start=0, end=9223372036854775807)****format (*args, **kwds)****format_map (mapping)****index (value[, start[, stop]]) → integer** -- return first index of value.

Raises `ValueError` if the value is not present.

Supporting `start` and `stop` arguments is optional, but recommended.

is_literal ()**isalnum ()****isalpha ()****isascii ()****isdecimal ()****isdigit ()****isidentifier ()****islower ()****isnumeric ()****isprintable ()****isspace ()****istitle ()****isupper ()****join (seq)****ljust (width, *args)****lower ()****lstrip (chars=None)**

maketrans ()

Return a translation table usable for `str.translate()`.

If there is only one argument, it must be a dictionary mapping Unicode ordinals (integers) or characters to Unicode ordinals, strings or None. Character keys will be then converted to ordinals. If there are two arguments, they must be strings of equal length, and in the resulting dictionary, each character in `x` will be mapped to the character at the same position in `y`. If there is a third argument, it must be a string, whose characters will be mapped to None in the result.

partition (sep)**replace (old, new, maxsplit=-1)****rfind (sub, start=0, end=9223372036854775807)****rindex (sub, start=0, end=9223372036854775807)****rjust (width, *args)****rpartition (sep)****rsplit (sep=None, maxsplit=-1)****rstrip (chars=None)****split (sep=None, maxsplit=-1)****splitlines (keepends=False)****startswith (prefix, start=0, end=9223372036854775807)****strip (chars=None)****swapcase ()****title ()****translate (*args)****upper ()****zfill (width)**

`class SCons.Subst.ListSubber (env, mode, conv, gvars)`

Bases: `collections.UserList`

A class to construct the results of a `scons_subst_list()` call.

Like `StringSubber`, this class binds a specific construction environment, mode, target and source with two methods (`substitute()` and `expand()`) that handle the expansion.

In addition, however, this class is used to track the state of the result(s) we're gathering so we can do the appropriate thing whenever we have to append another word to the result—start a new line, start a new word, append to the current word, etc. We do this by setting the “append” attribute to the right method so that our wrapper methods only need ever call `ListSubber.append()`, and the rest of the object takes care of doing the right thing internally.

`__UserList__cast (other)`

`__abc_impl = <_abc_data object>`

`add_new_word (x)`

`add_to_current_word (x)`

Append the string `x` to the end of the current last word in the result. If that is not possible, then just add it as a new word. Make sure the entire concatenated string inherits the object attributes of `x` (in particular, the escape function) by wrapping it as `CmdStringHolder`.

append (item)

`S.append(value)` – append value to the end of the sequence

clear () → None -- remove all items from S

close_strip (x)

Handle the “close strip” `$)` token.

copy ()

count (value) → integer -- return number of occurrences of value

expand (s, lvars, within_list)

Expand a single “token” as necessary, appending the expansion to the current result.

This handles expanding different types of things (strings, lists, callables) appropriately. It calls the wrapper `substitute()` method to re-expand things as necessary, so that the results of expansions of side-by-side strings still get re-evaluated separately, not smushed together.

expanded (s)

Determines if the string `s` requires further expansion.

Due to the implementation of `ListSubber` `expand` will call itself 2 additional times for an already expanded string. This method is used to determine if a string is already fully expanded and if so exit the loop early to prevent these recursive calls.

extend (other)

`S.extend(iterable)` – extend sequence by appending elements from the iterable

index (value[, start[, stop]]) → integer -- return first index of value.

Raises `ValueError` if the value is not present.

Supporting `start` and `stop` arguments is optional, but recommended.

insert (i, item)

`S.insert(index, value)` – insert value before index

literal (x)**next_line ()**

Arrange for the next word to start a new line. This is like starting a new word, except that we have to append another line to the result.

next_word ()

Arrange for the next word to start a new word.

open_strip (x)

Handle the “open strip” `$(` token.

pop ([, index]) → item -- remove and return item at index (default last).

Raise `IndexError` if list is empty or index is out of range.

remove (item)

`S.remove(value)` – remove first occurrence of value. Raise `ValueError` if the value is not present.

reverse ()

`S.reverse()` – reverse *IN PLACE*

sort (*args, **kws)

substitute (args, lvars, within_list)

Substitute expansions in an argument or list of arguments.

This serves as a wrapper for splitting up a string into separate tokens.

this_word ()

Arrange for the next word to append to the end of the current last word in the result.

class SCons.Subst.**Literal** (lstr)

Bases: **object**

A wrapper for a string. If you use this object wrapped around a string, then it will be interpreted as literal. When passed to the command interpreter, all special characters will be escaped.

escape (escape_func)

for_signature ()

is_literal ()

class SCons.Subst.**NLWrapper** (list, func)

Bases: **object**

A wrapper class that delays turning a list of sources or targets into a NodeList until it's needed. The specified function supplied when the object is initialized is responsible for turning raw nodes into proxies that implement the special attributes like `.abspath`, `.source`, etc. This way, we avoid creating those proxies just "in case" someone is going to use `$TARGET` or the like, and only go through the trouble if we really have to.

In practice, this might be a wash performance-wise, but it's a little cleaner conceptually...

_create_nodelist ()

_gen_nodelist ()

_return_nodelist ()

class SCons.Subst.**NullNodeList** (*args, **kwargs)

Bases: **SCons.Util.NullSeq**

_instance

SCons.Subst.**NullNodesList**

SCons.Subst.**SetAllowableExceptions** (*excepts)

class SCons.Subst.**SpecialAttrWrapper** (lstr, for_signature=None)

Bases: **object**

This is a wrapper for what we call a 'Node special attribute.' This is any of the attributes of a Node that we can reference from Environment variable substitution, such as `$TARGET.abspath` or `$$SOURCES[1].filebase`. We implement the same methods as `Literal` so we can handle special characters, plus a `for_signature` method, such that we can return some canonical string during signature calculation to avoid unnecessary rebuilds.

escape (escape_func)

for_signature ()

is_literal ()

class SCons.Subst.**StringSubber** (env, mode, conv, gvars)

Bases: **object**

A class to construct the results of a `scons_subst()` call.

This binds a specific construction environment, mode, target and source with two methods (`substitute()` and `expand()`) that handle the expansion.

expand (s, lvars)

Expand a single “token” as necessary, returning an appropriate string containing the expansion. This handles expanding different types of things (strings, lists, callables) appropriately. It calls the wrapper `substitute()` method to re-expand things as necessary, so that the results of expansions of side-by-side strings still get re-evaluated separately, not smushed together.

substitute (*args*, *lvars*)

Substitute expansions in an argument or list of arguments.

This serves as a wrapper for splitting up a string into separate tokens.

`class SCons.Subst.Target_or_Source (nl)`

Bases: **object**

A class that implements `$TARGET` or `$SOURCE` expansions by in turn wrapping a `NLWrapper`. This class handles the different methods used to access an individual proxy Node, calling the `NLWrapper` to create a proxy on demand.

`class SCons.Subst.Targets_or_Sources (nl)`

Bases: **collections.UserList**

A class that implements `$TARGETS` or `$SOURCES` expansions by in turn wrapping a `NLWrapper`. This class handles the different methods used to access the list, calling the `NLWrapper` to create proxies on demand.

Note that we subclass `collections.UserList` purely so that the `is_Sequence()` function will identify an object of this class as a list during variable expansion. We’re not really using any `collections.UserList` methods in practice.

`__UserList__cast` (*other*)

`__abc_impl` = `<_abc_data object>`

append (*item*)

`S.append(value)` – append value to the end of the sequence

clear () → None -- remove all items from S

copy ()

count (*value*) → integer -- return number of occurrences of value

extend (*other*)

`S.extend(iterable)` – extend sequence by appending elements from the iterable

index (*value*[, *start*[, *stop*]]) → integer -- return first index of value.

Raises `ValueError` if the value is not present.

Supporting *start* and *stop* arguments is optional, but recommended.

insert (*i*, *item*)

`S.insert(index, value)` – insert value before index

pop ([, *index*]) → item -- remove and return item at index (default last).

Raise `IndexError` if list is empty or index is out of range.

remove (*item*)

`S.remove(value)` – remove first occurrence of value. Raise `ValueError` if the value is not present.

reverse ()

`S.reverse()` – reverse *IN PLACE*

sort (**args*, ***kws*)

`SCons.Subst._remove_list` (*list*)

`SCons.Subst._rm_list` (*list*)

`SCons.Subst.escape_list` (*mylist*, *escape_func*)

Escape a list of arguments by running the specified `escape_func` on every object in the list that has an `escape()` method.

`SCons.Subst.quote_spaces` (arg)

Generic function for putting double quotes around any string that has white space in it.

`SCons.Subst.raise_exception` (exception, target, s)

`SCons.Subst.scons_subst` (strSubst, env, mode=1, target=None, source=None, gvars={}, lvars={}, conv=None)

Expand a string or list containing construction variable substitutions.

This is the work-horse function for substitutions in file names and the like. The companion `scons_subst_list()` function (below) handles separating command lines into lists of arguments, so see that function if that's what you're looking for.

`SCons.Subst.scons_subst_list` (strSubst, env, mode=1, target=None, source=None, gvars={}, lvars={}, conv=None)

Substitute construction variables in a string (or list or other object) and separate the arguments into a command list.

The companion `scons_subst()` function (above) handles basic substitutions within strings, so see that function instead if that's what you're looking for.

`SCons.Subst.scons_subst_once` (strSubst, env, key)

Perform single (non-recursive) substitution of a single construction variable keyword.

This is used when setting a variable when copying or overriding values in an Environment. We want to capture (expand) the old value before we override it, so people can do things like:

```
env2 = env.Clone(CCFLAGS = '$CCFLAGS -g')
```

We do this with some straightforward, brute-force code here...

`SCons.Subst.subst_dict` (target, source)

Create a dictionary for substitution of special construction variables.

This translates the following special arguments:

target - the target (object or array of objects),

used to generate the TARGET and TARGETS construction variables

source - the source (object or array of objects),

used to generate the SOURCES and SOURCE construction variables

SCons.Taskmaster module

Generic Taskmaster module for the SCons build engine.

This module contains the primary interface(s) between a wrapping user interface and the SCons build engine. There are two key classes here:

Taskmaster

This is the main engine for walking the dependency graph and calling things to decide what does or doesn't need to be built.

Task

This is the base class for allowing a wrapping interface to decide what does or doesn't actually need to be done. The intention is for a wrapping interface to subclass this as appropriate for different types of behavior it may need.

The canonical example is the SCons native Python interface, which has Task subclasses that handle its specific behavior, like printing "'foo' is up to date" when a top-level target doesn't need to be built, and handling the -c option by removing targets as its "build" action. There is also a separate subclass for suppressing this output when the -q option is used.

The Taskmaster instantiates a Task object for each (set of) target(s) that it decides need to be evaluated and/or built.

`class SCons.Taskmaster.AlwaysTask (tm, targets, top, node)`

Bases: `SCons.Taskmaster.Task`

`_abc_impl = <_abc_data object>`

`_exception_raise ()`

Raises a pending exception that was recorded while getting a Task ready for execution.

`_no_exception_to_raise ()`

`display (message)`

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

`exc_clear ()`

Clears any recorded exception.

This also changes the “exception_raise” attribute to point to the appropriate do-nothing method.

`exc_info ()`

Returns info about a recorded exception.

`exception_set (exception=None)`

Records an exception to be raised at the appropriate time.

This also changes the “exception_raise” attribute to point to the method that will, in fact

`execute ()`

Called to execute the task.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `prepare()`, `executed()` or `failed()`.

`executed ()`

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

`executed_with_callbacks ()`

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

`executed_without_callbacks ()`

Called when the task has been successfully executed and the Taskmaster instance doesn’t want to call the Node’s callback methods.

`fail_continue ()`

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using `Configure()`.

`fail_stop ()`

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using `Configure()`.

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using `Configure()`.

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “`scons -c`” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

needs_execute ()

Always returns True (indicating this Task should always be executed).

Subclasses that need this behavior (as opposed to the default of only executing Nodes that are out of date w.r.t. their dependencies) can use this as follows:

```
class MyTaskSubclass(SCons.Taskmaster.Task):
```

```
    needs_execute = SCons.Taskmaster.AlwaysTask.needs_execute
```

postprocess ()

Post-processes a task after it's been executed.

This examines all the targets just built (or not, we don't care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

trace_message (method, node, description='node')

```
class SCons.Taskmaster.OutOfDateTask (tm, targets, top, node)
```

```
    Bases: SCons.Taskmaster.Task
```

```
    _abc_impl = <_abc_data object>
```

_exception_raise ()

Raises a pending exception that was recorded while getting a Task ready for execution.

_no_exception_to_raise ()

display (message)

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the

alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

exc_clear ()

Clears any recorded exception.

This also changes the “exception_raise” attribute to point to the appropriate do-nothing method.

exc_info ()

Returns info about a recorded exception.

exception_set (exception=None)

Records an exception to be raised at the appropriate time.

This also changes the “exception_raise” attribute to point to the method that will, in fact

execute ()

Called to execute the task.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in prepare(), executed() or failed().

executed ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn’t want to call the Node’s callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

needs_execute ()

Returns True (indicating this Task should be executed) if this Task's target state indicates it needs executing, which has already been determined by an earlier up-to-date check.

postprocess ()

Post-processes a task after it's been executed.

This examines all the targets just built (or not, we don't care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

trace_message (method, node, description='node')

class SCons.Taskmaster.Stats

Bases: **object**

A simple class for holding statistics about the disposition of a Node by the Taskmaster. If we're collecting statistics, each Node processed by the Taskmaster gets one of these attached, in which case the Taskmaster records its decision each time it processes the Node. (Ideally, that's just once per Node.)

class SCons.Taskmaster.Task (tm, targets, top, node)

Bases: **abc.ABC**

SCons build engine abstract task class.

This controls the interaction of the actual building of node and the rest of the engine.

This is expected to handle all of the normally-customizable aspects of controlling a build, so any given application *should* be able to do what it wants by sub-classing this class and overriding methods as appropriate. If an application needs to customize something by sub-classing Taskmaster (or some other build engine class), we should first try to migrate that functionality into this class.

Note that it's generally a good idea for sub-classes to call these methods explicitly to update state, etc., rather than roll their own interaction with Taskmaster from scratch.

_abc_impl = <_abc_data object>

_exception_raise ()

Raises a pending exception that was recorded while getting a Task ready for execution.

_no_exception_to_raise ()

display (message)

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

exc_clear ()

Clears any recorded exception.

This also changes the “exception_raise” attribute to point to the appropriate do-nothing method.

exc_info ()

Returns info about a recorded exception.

exception_set (exception=None)

Records an exception to be raised at the appropriate time.

This also changes the “exception_raise” attribute to point to the method that will, in fact

execute ()

Called to execute the task.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in prepare(), executed() or failed().

executed ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn’t want to call the Node’s callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what’s necessary.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current. This is the default behavior for building only what’s necessary.

abstract_needs_execute ()

postprocess ()

Post-processes a task after it’s been executed.

This examines all the targets just built (or not, we don’t care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

trace_message (method, node, description='node')

`class SCons.Taskmaster.Taskmaster (targets=[], tasker=None, order=None, trace=None)`

Bases: **object**

The Taskmaster for walking the dependency DAG.

_find_next_ready_node ()

Finds the next node that is ready to be built.

This is *the* main guts of the DAG walk. We loop through the list of candidates, looking for something that has no un-built children (i.e., that is a leaf Node or has dependencies that are all leaf Nodes or up-to-date). Candidate Nodes are re-scanned (both the target Node itself and its sources, which are always scanned in the context of a given target) to discover implicit dependencies. A Node that must wait for some children to be built will be put back on the candidates list after the children have finished building. A Node that has been put back on the candidates list in this way may have itself (or its sources) re-scanned, in order to handle generated header files (e.g.) and the implicit dependencies therein.

Note that this method does not do any signature calculation or up-to-date check itself. All of that is handled by the Task class. This is purely concerned with the dependency graph walk.


_validate_pending_children ()

Validate the content of the pending_children set. Assert if an internal error is found.

This function is used strictly for debugging the taskmaster by checking that no invariants are violated. It is not used in normal operation.


The pending_children set is used to detect cycles in the dependency graph. We call a “pending child” a child that is found in the “pending” state when checking the dependencies of its parent node.

A pending child can occur when the Taskmaster completes a loop through a cycle. For example, let’s imagine a graph made of three nodes (A, B and C) making a cycle. The evaluation starts at node A. The Taskmaster first considers whether node A’s child B is up-to-date. Then, recursively, node B needs to check whether node C is up-to-date. This leaves us with a dependency graph looking like:

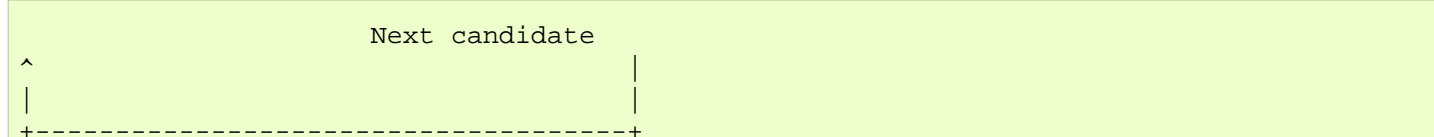

Now, when the Taskmaster examines the Node C’s child Node A, it finds that Node A is in the “pending” state. Therefore, Node A is a pending child of node C.

Pending children indicate that the Taskmaster has potentially loop back through a cycle. We say potentially because it could also occur when a DAG is evaluated in parallel. For example, consider the following graph:



```

+-----> Node D (NoState) -----+
      /
Next candidate /

```

The Taskmaster first evaluates the nodes A, B, and C and starts building some children of node C. Assuming, that the maximum parallel level has not been reached, the Taskmaster will examine Node D. It will find that Node C is a pending child of Node D.

In summary, evaluating a graph with a cycle will always involve a pending child at one point. A pending child might indicate either a cycle or a diamond-shaped DAG. Only a fraction of the nodes ends-up being a “pending child” of another node. This keeps the pending_children set small in practice.

We can differentiate between the two cases if we wait until the end of the build. At this point, all the pending children nodes due to a diamond-shaped DAG will have been properly built (or will have failed to build). But, the pending children involved in a cycle will still be in the pending state.

The taskmaster removes nodes from the pending_children set as soon as a pending_children node moves out of the pending state. This also helps to keep the pending_children set small.

cleanup ()

Check for dependency cycles.

find_next_candidate ()

Returns the next candidate Node for (potential) evaluation.

The candidate list (really a stack) initially consists of all of the top-level (command line) targets provided when the Taskmaster was initialized. While we walk the DAG, visiting Nodes, all the children that haven’t finished processing get pushed on to the candidate list. Each child can then be popped and examined in turn for whether *their* children are all up-to-date, in which case a Task will be created for their actual evaluation and potential building.

Here is where we also allow candidate Nodes to alter the list of Nodes that should be examined. This is used, for example, when invoking SCons in a source directory. A source directory Node can return its corresponding build directory Node, essentially saying, “Hey, you really need to build this thing over here instead.”

next_task ()

Returns the next task to be executed.

This simply asks for the next Node to be evaluated, and then wraps it in the specific Task subclass with which we were initialized.

no_next_candidate ()

Stops Taskmaster processing by not returning a next candidate.

Note that we have to clean-up the Taskmaster candidate list because the cycle detection depends on the fact all nodes have been processed somehow.

stop ()

Stops the current build completely.

trace_message (message)

trace_node (node)

will_not_build (nodes, node_func=<function Taskmaster.<lambda>>)

Perform clean-up about nodes that will never be built. Invokes a user defined function on all of these nodes (including all of their parents).

`SCons.Taskmaster.dump_stats ()`

`SCons.Taskmaster.find_cycle (stack, visited)`

SCons.Util module

SCons.Util

Various utility functions go here.

`SCons.Util.AddMethod (obj, function, name=None)`

Adds either a bound method to an instance or the function itself (or an unbound method in Python 2) to a class. If name is omitted the name of the specified function is used by default.

Example:

```
a = A()
def f(self, x, y):
    self.z = x + y
AddMethod(f, A, "add")
a.add(2, 4)
print(a.z)
AddMethod(lambda self, i: self.l[i], a, "listIndex")
print(a.listIndex(5))
```

`SCons.Util.AddPathIfExists` (env_dict, key, path, sep=':')

This function will take 'key' out of the dictionary 'env_dict', then add the path 'path' to that key if it is not already there. This treats the value of env_dict[key] as if it has a similar format to the PATH variable...a list of paths separated by tokens. The 'path' will get added to the list if it is not already there.

`SCons.Util.AppendPath` (oldpath, newpath, sep=':', delete_existing=1, canonicalize=None)

This appends new path elements to the given old path. Will only add any particular path once (leaving the last one it encounters and ignoring the rest, to preserve path order), and will `os.path.normpath` and `os.path.normcase` all paths to help assure this. This can also handle the case where the given old path variable is a list instead of a string, in which case a list will be returned instead of a string.

Example

Old Path: "/foo/bar:/foo" New Path: "/biz/boom:/foo" Result: "/foo/bar:/biz/boom:/foo"

If `delete_existing` is 0, then adding a path that exists will not move it to the end; it will stay where it is in the list.

If `canonicalize` is not None, it is applied to each element of `newpath` before use.

`class SCons.Util.CLVar` (seq=[])

Bases: `collections.UserList`

A class for command-line construction variables.

This is a list that uses `Split()` to split an initial string along white-space arguments, and similarly to split any strings that get added. This allows us to Do the Right Thing with `Append()` and `Prepend()` (as well as straight Python `foo = env['VAR'] + 'arg1 arg2'`) regardless of whether a user adds a list or a string to a command-line construction variable.

`__UserList__cast` (other)

`__abc_impl` = <_abc_data object>

`append` (item)

S.append(value) – append value to the end of the sequence

`clear` () → None -- remove all items from S

`copy` ()

`count` (value) → integer -- return number of occurrences of value

`extend` (other)

S.extend(iterable) – extend sequence by appending elements from the iterable

`index` (value[, start[, stop]]) → integer -- return first index of value.

Raises `ValueError` if the value is not present.

Supporting `start` and `stop` arguments is optional, but recommended.

`insert` (i, item)

S.insert(index, value) – insert value before index

`pop` ([, index]) → item -- remove and return item at index (default last).

Raise `IndexError` if list is empty or index is out of range.

remove (item)

S.remove(value) – remove first occurrence of value. Raise ValueError if the value is not present.

reverse ()

S.reverse() – reverse *IN PLACE*

sort (*args, **kwds)

class SCons.Util.Delegate (attribute)

Bases: **object**

A Python Descriptor class that delegates attribute fetches to an underlying wrapped subject of a Proxy. Typical use:

```
class Foo(Proxy):
```

```
    __str__ = Delegate('__str__')
```

class SCons.Util.DisplayEngine

Bases: **object**

print_it = *True*

set_mode (mode)

SCons.Util.IDX (N)

class SCons.Util.LogicalLines (fileobj)

Bases: **object**

Wrapper class for the logical_lines method.

Allows us to read all “logical” lines at once from a given file object.

readlines ()

SCons.Util.MD5collect (signatures)

Collects a list of signatures into an aggregate signature.

signatures - a list of signatures returns - the aggregate signature

SCons.Util.MD5filesignature (fname, chunksize=65536)

Generate the md5 signature of a file

Parameters:

- **fname** – file to hash
- **chunksize** – chunk size to read

Returns: String of Hex digits representing the signature

SCons.Util.MD5signature (s)

Generate md5 signature of a string

Parameters: **s** – either string or bytes. Normally should be bytes

Returns: String of hex digits representing the signature

class SCons.Util.NodeList (initlist=None)

Bases: **collections.UserList**

This class is almost exactly like a regular list of Nodes (actually it can hold any object), with one important difference. If you try to get an attribute from this list, it will return that attribute from every item in the list. For example:

```
>>> someList = NodeList([ ' foo ', ' bar ' ])
>>> someList.strip()
[ 'foo', 'bar' ]
```

__UserList__cast (other)

__abc_impl = <_abc_data object>

append (item)

S.append(value) – append value to the end of the sequence

clear () → None -- remove all items from S**copy ()****count (value)** → integer -- return number of occurrences of value**extend (other)**

S.extend(iterable) – extend sequence by appending elements from the iterable

index (value[, start[, stop]]) → integer -- return first index of value.

Raises ValueError if the value is not present.

Supporting start and stop arguments is optional, but recommended.

insert (i, item)

S.insert(index, value) – insert value before index

pop ([, index]) → item -- remove and return item at index (default last).

Raise IndexError if list is empty or index is out of range.

remove (item)

S.remove(value) – remove first occurrence of value. Raise ValueError if the value is not present.

reverse ()S.reverse() – reverse *IN PLACE***sort (*args, **kwds)****class SCons.Util.Null (*args, **kwargs)**Bases: **object**

Null objects always and reliably “do nothing.”

class SCons.Util.NullSeq (*args, **kwargs)Bases: **SCons.Util.Null**

A Null object that can also be iterated over.

exception SCons.Util.PlainWindowsErrorBases: **OSError****args****characters_written****errno**

POSIX exception code

filename

exception filename

filename2

second exception filename

strerror

exception strerror

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

SCons.Util.PrependPath (oldpath, newpath, sep=':', delete_existing=1, canonicalize=None)

This prepends newpath elements to the given oldpath. Will only add any particular path once (leaving the first one it encounters and ignoring the rest, to preserve path order), and will use `os.path.normpath` and `os.path.normcase` on all paths to help assure this. This can also handle the case where the given old path variable is a list instead of a string, in which case a list will be returned instead of a string.

Example

Old Path: `"/foo/bar:/foo"` New Path: `"/biz/boom:/foo"` Result: `"/biz/boom:/foo:/foo/bar"`

If `delete_existing` is 0, then adding a path that exists will not move it to the beginning; it will stay where it is in the list.

If `canonicalize` is not `None`, it is applied to each element of newpath before use.

`class SCons.Util.Proxy (subject)`

Bases: `object`

A simple generic Proxy class, forwarding all calls to subject. So, for the benefit of the python newbie, what does this really mean? Well, it means that you can take an object, let's call it 'objA', and wrap it in this Proxy class, with a statement like this

```
proxyObj = Proxy(objA),
```

Then, if in the future, you do something like this

```
x = proxyObj.var1,
```

since Proxy does not have a 'var1' attribute (but presumably objA does), the request actually is equivalent to saying

```
x = objA.var1
```

Inherit from this class to create a Proxy.

Note that, with new-style classes, this does *not* work transparently for Proxy subclasses that use special `.*__()` method names, because those names are now bound to the class, not the individual instances. You now need to know in advance which `.*__()` method names you want to pass on to the underlying Proxy object, and specifically delegate their calls like this:

```
class Foo(Proxy):
```

```
    __str__ = Delegate('__str__')
```

`get ()`

Retrieve the entire wrapped object

`SCons.Util.RegError`

alias of `SCons.Util._NoError`

`SCons.Util.RegGetValue (root, key)`

`SCons.Util.RegOpenKeyEx (root, key)`

`SCons.Util.RenameFunction (function, name)`

Returns a function identical to the specified function, but with the specified name.

`class SCons.Util.Selector`

Bases: `collections.OrderedDict`

A callable ordered dictionary that maps file suffixes to dictionary values. We preserve the order in which items are added so that `get_suffix()` calls always return the first suffix added.

`clear ()` → None. Remove all items from od.

`copy ()` → a shallow copy of od

`fromkeys ()`

Create a new ordered dictionary with keys from iterable and values set to value.

`get ()`

Return the value for key if key is in the dictionary, else default.

`items ()` → a set-like object providing a view on D's items

keys () → a set-like object providing a view on D's keys

move_to_end ()

Move an existing element to the end (or beginning if last is false).
Raise `KeyError` if the element does not exist.

pop (k[, d]) → v, remove specified key and return the corresponding value. If key is not found, d is returned if given, otherwise `KeyError` is raised.

popitem ()

Remove and return a (key, value) pair from the dictionary.
Pairs are returned in LIFO order if last is true or FIFO order if false.

setdefault ()

Insert key with a value of default if key is not in the dictionary.
Return the value for key if key is in the dictionary, else default.

update ([, E], **F) → None. Update D from dict/iterable E and F.

If E is present and has a `.keys()` method, then does: for k in E: `D[k] = E[k]` If E is present and lacks a `.keys()` method, then does: for k, v in E: `D[k] = v` In either case, this is followed by: for k in F: `D[k] = F[k]`

values () → an object providing a view on D's values

`SCons.Util.Split (arg)`

`class SCons.Util.Unbuffered (file)`

Bases: `object`

A proxy class that wraps a file object, flushing after every write, and delegating everything else to the wrapped object.

`write (arg)`

`class SCons.Util.UniqueList (seq=[])`

Bases: `collections.UserList`

`__UniqueList__make_unique ()`

`__UserList__cast (other)`

`__abc_impl = <_abc_data object>`

`append (item)`

`S.append(value)` – append value to the end of the sequence

`clear ()` → None -- remove all items from S

`copy ()`

`count (value)` → integer -- return number of occurrences of value

`extend (other)`

`S.extend(iterable)` – extend sequence by appending elements from the iterable

`index (value[, start[, stop]])` → integer -- return first index of value.

Raises `ValueError` if the value is not present.

Supporting start and stop arguments is optional, but recommended.

`insert (i)`

`S.insert(index, value)` – insert value before index

`pop ([, index])` → item -- remove and return item at index (default last).

Raise `IndexError` if list is empty or index is out of range.

remove (item)

`S.remove(value)` – remove first occurrence of value. Raise `ValueError` if the value is not present.

reverse ()

`S.reverse()` – reverse *IN PLACE*

sort (*args, **kwds)

`SCons.Util.WhereIs (file, path=None, pathext=None, reject=[])`

`SCons.Util.WinError`

alias of `SCons.Util.PlainWindowsError`

exception `SCons.Util._NoError`

Bases: `Exception`

args

with_traceback ()

`Exception.with_traceback(tb)` – set self.__traceback__ to tb and return self.

`SCons.Util._semi_deepcopy_list (x)`

`SCons.Util._semi_deepcopy_tuple (x)`

`SCons.Util.adjustixes (fname, pre, suf, ensure_suffix=False)`

`SCons.Util.case_sensitive_suffixes (s1, s2)`

`SCons.Util.cmp (a, b)`

Define `cmp` because it's no longer available in python3 Works under python 2 as well

`SCons.Util.containsAll (str, set)`

Check whether sequence str contains ALL of the items in set.

`SCons.Util.containsAny (str, set)`

Check whether sequence str contains ANY of the items in set.

`SCons.Util.containsOnly (str, set)`

Check whether sequence str contains ONLY items in set.

`SCons.Util.dictify (keys, values, result={})`

`SCons.Util.do_flatten (sequence, result, isinstance=<built-in function isinstance>, StringTypes=(<class 'str'>, <class 'collections.UserString'>), SequenceTypes=(<class 'list'>, <class 'tuple'>, <class 'collections.UserList'>, <class 'collections.abc.MappingView'>))`

`SCons.Util.flatten (obj, isinstance=<built-in function isinstance>, StringTypes=(<class 'str'>, <class 'collections.UserString'>), SequenceTypes=(<class 'list'>, <class 'tuple'>, <class 'collections.UserList'>, <class 'collections.abc.MappingView'>), do_flatten=<function do_flatten>)`

Flatten a sequence to a non-nested list.

`Flatten()` converts either a single scalar or a nested sequence to a non-nested list. Note that `flatten()` considers strings to be scalars instead of sequences like Python would.

`SCons.Util.flatten_sequence (sequence, isinstance=<built-in function isinstance>, StringTypes=(<class 'str'>, <class 'collections.UserString'>), SequenceTypes=(<class 'list'>, <class 'tuple'>, <class 'collections.UserList'>, <class 'collections.abc.MappingView'>), do_flatten=<function do_flatten>)`

Flatten a sequence to a non-nested list.

Same as `flatten()`, but it does not handle the single scalar case. This is slightly more efficient when one knows that the sequence to flatten can not be a scalar.

`SCons.Util.get_env_bool (env, name, default=False)`

Convert a construction variable to bool.

If the value of *name* in *env* is 'true', 'yes', 'y', 'on' (case insensitive) or anything convertible to int that yields non-zero then return True; if 'false', 'no', 'n', 'off' (case insensitive) or a number that converts to integer zero return False. Otherwise, return *default*.

Parameters:

- **env** – construction environment, or any dict-like object
- **name** – name of the variable
- **default** – value to return if *name* not in *env* or cannot be converted (default: False)

Returns: the “truthiness” of *name*

Return type: bool

SCons.Util.**get_environment_var** (varstr)

Given a string, first determine if it looks like a reference to a single environment variable, like “\$FOO” or “\${FOO}”. If so, return that variable with no decorations (“FOO”). If not, return None.

SCons.Util.**get_native_path** (path)

Transforms an absolute path into a native path for the system. Non-Cygwin version, just leave the path alone.

SCons.Util.**get_os_env_bool** (name, default=False)

Convert an environment variable to bool.

Conversion is the same as for **get_env_bool()**.

SCons.Util.**is_Dict** (obj, isinstance=<built-in function isinstance>, DictTypes=(<class 'dict'>, <class 'collections.UserDict'>))

SCons.Util.**is_List** (obj, isinstance=<built-in function isinstance>, ListTypes=(<class 'list'>, <class 'collections.UserList'>))

SCons.Util.**is_Scalar** (obj, isinstance=<built-in function isinstance>, StringType=(<class 'str'>, <class 'collections.UserString'>), SequenceTypes=(<class 'list'>, <class 'tuple'>, <class 'collections.UserList'>, <class 'collections.abc.MappingView'>))

SCons.Util.**is_Sequence** (obj, isinstance=<built-in function isinstance>, SequenceTypes=(<class 'list'>, <class 'tuple'>, <class 'collections.UserList'>, <class 'collections.abc.MappingView'>))

SCons.Util.**is_String** (obj, isinstance=<built-in function isinstance>, StringType=(<class 'str'>, <class 'collections.UserString'>))

SCons.Util.**is_Tuple** (obj, isinstance=<built-in function isinstance>, tuple=<class 'tuple'>)

SCons.Util.**logical_lines** (physical_lines, joiner=<built-in method join of str object>)

SCons.Util.**make_path_relative** (path)

makes an absolute path name to a relative pathname.

SCons.Util.**print_tree** (root, child_func, prune=0, showtags=0, margin=[0], visited=None, lastChild=False, singleLineDraw=False)

Print a tree of nodes. This is like **render_tree**, except it prints lines directly instead of creating a string representation in memory, so that huge trees can be printed.

Parameters:

- *root* - the root node of the tree
- *child_func* - the function called to get the children of a node
- *prune* - don't visit the same node twice
- *showtags* - print status information to the left of each node line
- *margin* - the format of the left margin to use for children of root. 1 results in a pipe, and 0 results in no pipe.
- *visited* - a dictionary of visited nodes in the current branch if not prune, or in the whole tree if prune.
- *singleLineDraw* - use line-drawing characters rather than ASCII.

SCons.Util.**render_tree** (root, child_func, prune=0, margin=[0], visited=None)

Render a tree of nodes into an ASCII tree view.

Parameters:

- *root*: the root node of the tree
- *child_func*: the function called to get the children of a node
- *prune*: don't visit the same node twice
- *margin*: the format of the left margin to use for children of root. 1 results in a pipe, and 0 results in no pipe.
- *visited*: a dictionary of visited nodes in the current branch if not prune, or in the whole tree if prune.

`SCons.Util.rightmost_separator` (path, sep)

`SCons.Util.semi_deepcopy` (x)

`SCons.Util.semi_deepcopy_dict` (x, exclude=[])

`SCons.Util.silent_intern` (x)

Perform `sys.intern()` on the passed argument and return the result. If the input is ineligible the original argument is returned and no exception is thrown.

`SCons.Util.splitext` (path)

Same as `os.path.splitext()` but faster.

`SCons.Util.to_String` (s, isinstance=<built-in function isinstance>, str=<class 'str'>, UserString=<class 'collections.UserString'>, BaseStringTypes=<class 'str'>)

`SCons.Util.to_String_for_signature` (obj, to_String_for_subst=<function to_String_for_subst>, AttributeError=<class 'AttributeError'>)

`SCons.Util.to_String_for_subst` (s, isinstance=<built-in function isinstance>, str=<class 'str'>, to_String=<function to_String>, BaseStringTypes=<class 'str'>, SequenceTypes=(<class 'list'>, <class 'tuple'>, <class 'collections.UserList'>, <class 'collections.abc.MappingView'>), UserString=<class 'collections.UserString'>)

`SCons.Util.to_bytes` (s)

`SCons.Util.to_str` (s)

`SCons.Util.unique` (s)

Return a list of the elements in s, but without duplicates.

For example, `unique([1,2,3,1,2,3])` is some permutation of [1,2,3], `unique("abcabc")` some permutation of ["a", "b", "c"], and `unique([(1, 2), [2, 3], [1, 2]])` some permutation of [[2, 3], [1, 2]].

For best speed, all sequence elements should be hashable. Then `unique()` will usually work in linear time.

If not possible, the sequence elements should enjoy a total ordering, and if `list(s).sort()` doesn't raise `TypeError` it's assumed that they do enjoy a total ordering. Then `unique()` will usually work in $O(N \cdot \log_2(N))$ time.

If that's not possible either, the sequence elements must support equality-testing. Then `unique()` will usually work in quadratic time.

`SCons.Util.uniquer` (seq, idfun=None)

`SCons.Util.uniquer_hashables` (seq)

`SCons.Util.updrive` (path)

Make the drive letter (if any) upper case. This is useful because Windows is inconsistent on the case of the drive letter, which can cause inconsistencies when calculating command signatures.

SCons.Warnings module

`SCons.Warnings`

This file implements the warnings framework for SCons.

exception `SCons.Warnings.CacheVersionWarning`

Bases: `SCons.Warnings.WarningOnByDefault`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.CacheWriteErrorWarning

Bases: SCons.Warnings.Warning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.CorruptSConsignWarning

Bases: SCons.Warnings.WarningOnByDefault

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DependencyWarning

Bases: SCons.Warnings.Warning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DeprecatedDebugOptionsWarning

Bases: SCons.Warnings.MandatoryDeprecatedWarning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DeprecatedMissingSConscriptWarning

Bases: SCons.Warnings.DeprecatedWarning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DeprecatedOptionsWarning

Bases: SCons.Warnings.MandatoryDeprecatedWarning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DeprecatedSourceCodeWarning

Bases: SCons.Warnings.FutureDeprecatedWarning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DeprecatedWarning

Bases: SCons.Warnings.Warning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DevelopmentVersionWarning

Bases: SCons.Warnings.WarningOnByDefault

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.DuplicateEnvironmentWarning

Bases: SCons.Warnings.WarningOnByDefault

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.FortranCxxMixWarning

Bases: SCons.Warnings.LinkWarning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.FutureDeprecatedWarning

Bases: SCons.Warnings.Warning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.FutureReservedVariableWarning

Bases: SCons.Warnings.WarningOnByDefault

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.LinkWarning

Bases: SCons.Warnings.WarningOnByDefault

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.MandatoryDeprecatedWarning

Bases: SCons.Warnings.DeprecatedWarning

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.MisleadingKeywordsWarning`

Bases: `SCons.Warnings.WarningOnByDefault`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.MissingSConscriptWarning`

Bases: `SCons.Warnings.WarningOnByDefault`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.NoObjectCountWarning`

Bases: `SCons.Warnings.WarningOnByDefault`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.NoParallelSupportWarning`

Bases: `SCons.Warnings.WarningOnByDefault`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.PythonVersionWarning`

Bases: `SCons.Warnings.DeprecatedWarning`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.ReservedVariableWarning`

Bases: `SCons.Warnings.WarningOnByDefault`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.StackSizeWarning`

Bases: `SCons.Warnings.WarningOnByDefault`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `SCons.Warnings.TargetNotBuiltWarning`

Bases: `SCons.Warnings.Warning`

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.TaskmasterNeedsExecuteWarning

Bases: **SCons.Warnings.DeprecatedWarning**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.VisualCMissingWarning

Bases: **SCons.Warnings.WarningOnByDefault**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.VisualStudioMissingWarning

Bases: **SCons.Warnings.Warning**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.VisualStudioVersionMismatch

Bases: **SCons.Warnings.WarningOnByDefault**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.Warning

Bases: **SCons.Errors.UserError**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception SCons.Warnings.WarningOnByDefault

Bases: **SCons.Warnings.Warning**

args**with_traceback ()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

SCons.Warnings.enableWarningClass (clazz)

Enables all warnings that are of type clazz or derived from clazz.

SCons.Warnings.process_warn_strings (arguments)

Process requests to enable/disable warnings.

The requests are strings passed to the `-warn` option or the `SetOption('warn')` function.

An argument to this option should be of the form `<warning-class>` or `no-<warning-class>`. The warning class is munged in order to get an actual class name from the classes above, which we need to pass to the `{enable,disable}WarningClass()` functions. The supplied `<warning-class>` is split on hyphens, each element is capitalized, then smushed back together. Then the string "Warning" is appended to get the class name.

For example, 'deprecated' will enable the `DeprecatedWarning` class. 'no-dependency' will disable the `DependencyWarning` class.

As a special case, `-warn=all` and `-warn=no-all` will enable or disable (respectively) the base `Warning` class of all warnings.

`SCons.Warnings.suppressWarningClass` (clazz)

Suppresses all warnings that are of type `clazz` or derived from `clazz`.

`SCons.Warnings.warn` (clazz, *args)

`SCons.Warnings.warningAsException` (flag=1)

Turn warnings into exceptions. Returns the old value of the flag.

SCons.cpp module

SCons C Pre-Processor module

`SCons.cpp.CPP_to_Python` (s)

Converts a C pre-processor expression into an equivalent Python expression that can be evaluated.

`SCons.cpp.CPP_to_Python_Ops_Sub` (m)

`SCons.cpp.Cleanup_CPP_Expressions` (ts)

`class SCons.cpp.DumbPreProcessor` (*args, **kw)

Bases: `SCons.cpp.PreProcessor`

A preprocessor that ignores all `#if/#elif/#else/#endif` directives and just reports back *all* of the `#include` files (like the classic SCons scanner did).

This is functionally equivalent to using a regular expression to find all of the `#include` lines, only slower. It exists mainly as an example of how the main `PreProcessor` class can be sub-classed to tailor its behavior.

`_do_if_else_condition` (condition)

Common logic for evaluating the conditions on `#if`, `#ifdef` and `#ifndef` lines.

`_match_tuples` (tuples)

`_parse_tuples` (contents)

`_process_tuples` (tuples, file=None)

`all_include` (t)

`do_define` (t)

Default handling of a `#define` line.

`do_elif` (t)

Default handling of a `#elif` line.

`do_else` (t)

Default handling of a `#else` line.

`do_endif` (t)

Default handling of a `#endif` line.

`do_if` (t)

Default handling of a `#if` line.

`do_ifdef` (t)

Default handling of a `#ifdef` line.

`do_ifndef` (t)

Default handling of a `#ifndef` line.

do_import (t)

Default handling of a #import line.

do_include (t)

Default handling of a #include line.

do_include_next (t)

Default handling of a #include line.

do_nothing (t)

Null method for when we explicitly want the action for a specific preprocessor directive to do nothing.

do_undef (t)

Default handling of a #undef line.

eval_expression (t)

Evaluates a C preprocessor expression.

This is done by converting it to a Python equivalent and eval()ing it in the C preprocessor namespace we use to track #define values.

finalize_result (fname)**find_include_file (t)**

Finds the #include file for a given preprocessor tuple.

initialize_result (fname)**process_contents (contents)**

Pre-processes a file contents.

Is used by tests

process_file (file)

Pre-processes a file.

This is the main internal entry point.

read_file (file)**resolve_include (t)**

Resolve a tuple-ized #include line.

This handles recursive expansion of values without "" or <> surrounding the name until an initial " or < is found, to handle #include FILE where FILE is a #define somewhere else.

restore ()

Pops the previous dispatch table off the stack and makes it the current one.

save ()

Pushes the current dispatch table on the stack and re-initializes the current dispatch table to the default.

scons_current_file (t)**start_handling_includes (t=None)**

Causes the PreProcessor object to start processing #import, #include and #include_next lines.

This method will be called when a #if, #ifdef, #ifndef or #elif evaluates True, or when we reach the #else in a #if, #ifdef, #ifndef or #elif block where a condition already evaluated False.

stop_handling_includes (t=None)

Causes the PreProcessor object to stop processing #import, #include and #include_next lines.

This method will be called when a #if, #ifdef, #ifndef or #elif evaluates False, or when we reach the #else in a #if, #ifdef, #ifndef or #elif block where a condition already evaluated True.

tupleize (contents)

Turns the contents of a file into a list of easily-processed tuples describing the CPP lines in the file. The first element of each tuple is the line's preprocessor directive (`#if`, `#include`, `#define`, etc., minus the initial `#`). The remaining elements are specific to the type of directive, as pulled apart by the regular expression.

`class SCons.cpp.FunctionEvaluator` (name, args, expansion)

Bases: `object`

Handles delayed evaluation of a `#define` function call.

`class SCons.cpp.PreProcessor` (current='.', cpppath=(), dict={}, all=0, depth=-1)

Bases: `object`

The main workhorse class for handling C pre-processing.

`_do_if_else_condition` (condition)

Common logic for evaluating the conditions on `#if`, `#ifdef` and `#ifndef` lines.

`_match_tuples` (tuples)

`_parse_tuples` (contents)

`_process_tuples` (tuples, file=None)

`all_include` (t)

`do_define` (t)

Default handling of a `#define` line.

`do_elif` (t)

Default handling of a `#elif` line.

`do_else` (t)

Default handling of a `#else` line.

`do_endif` (t)

Default handling of a `#endif` line.

`do_if` (t)

Default handling of a `#if` line.

`do_ifdef` (t)

Default handling of a `#ifdef` line.

`do_ifndef` (t)

Default handling of a `#ifndef` line.

`do_import` (t)

Default handling of a `#import` line.

`do_include` (t)

Default handling of a `#include` line.

`do_include_next` (t)

Default handling of a `#include` line.

`do_nothing` (t)

Null method for when we explicitly want the action for a specific preprocessor directive to do nothing.

`do_undef` (t)

Default handling of a `#undef` line.

`eval_expression` (t)

Evaluates a C preprocessor expression.

This is done by converting it to a Python equivalent and `eval()`ing it in the C preprocessor namespace we use to track `#define` values.

`finalize_result (fname)`

`find_include_file (t)`

Finds the `#include` file for a given preprocessor tuple.

`initialize_result (fname)`

`process_contents (contents)`

Pre-processes a file contents.

Is used by tests

`process_file (file)`

Pre-processes a file.

This is the main internal entry point.

`read_file (file)`

`resolve_include (t)`

Resolve a tuple-ized `#include` line.

This handles recursive expansion of values without `""` or `<>` surrounding the name until an initial `"` or `<` is found, to handle `#include FILE` where `FILE` is a `#define` somewhere else.

`restore ()`

Pops the previous dispatch table off the stack and makes it the current one.

`save ()`

Pushes the current dispatch table on the stack and re-initializes the current dispatch table to the default.

`scons_current_file (t)`

`start_handling_includes (t=None)`

Causes the PreProcessor object to start processing `#import`, `#include` and `#include_next` lines.

This method will be called when a `#if`, `#ifdef`, `#ifndef` or `#elif` evaluates True, or when we reach the `#else` in a `#if`, `#ifdef`, `#ifndef` or `#elif` block where a condition already evaluated False.

`stop_handling_includes (t=None)`

Causes the PreProcessor object to stop processing `#import`, `#include` and `#include_next` lines.

This method will be called when a `#if`, `#ifdef`, `#ifndef` or `#elif` evaluates False, or when we reach the `#else` in a `#if`, `#ifdef`, `#ifndef` or `#elif` block where a condition already evaluated True.

`tupleize (contents)`

Turns the contents of a file into a list of easily-processed tuples describing the CPP lines in the file.

The first element of each tuple is the line's preprocessor directive (`#if`, `#include`, `#define`, etc., minus the initial `#`). The remaining elements are specific to the type of directive, as pulled apart by the regular expression.

SCons.dblite module

`dblite.py` module contributed by Ralf W. Grosse-Kunstleve. Extended for Unicode by Steven Knight.

`SCons.dblite._exercise ()`

`class SCons.dblite.dblite (file_base_name, flag, mode)`

Bases: **object**

Squirrel away references to the functions in various modules that we'll use when our `__del__()` method calls our `sync()` method during shutdown. We might get destroyed when Python is in the midst of tearing down the different modules we import in an essentially arbitrary order, and some of the various modules's global attributes may already be wiped out from under us.

See the discussion at:

<http://mail.python.org/pipermail/python-bugs-list/2003-March/016877.html>

`_check_writable ()`**`_open ()`**

Open file and return a stream. Raise `OSError` upon failure.

`file` is either a text or byte string giving the name (and the path if the file isn't in the current working directory) of the file to be opened or an integer file descriptor of the file to be wrapped. (If a file descriptor is given, it is closed when the returned I/O object is closed, unless `closefd` is set to `False`.)

`mode` is an optional string that specifies the mode in which the file is opened. It defaults to `'r'` which means open for reading in text mode. Other common values are `'w'` for writing (truncating the file if it already exists), `'x'` for creating and writing to a new file, and `'a'` for appending (which on some Unix systems, means that all writes append to the end of the file regardless of the current seek position). In text mode, if encoding is not specified the encoding used is platform dependent: `locale.getpreferredencoding(False)` is called to get the current locale encoding. (For reading and writing raw bytes use binary mode and leave encoding unspecified.) The available modes are:

Character	Meaning
<code>'r'</code>	open for reading (default)
<code>'w'</code>	open for writing, truncating the file first
<code>'x'</code>	create a new file and open it for writing
<code>'a'</code>	open for writing, appending to the end of the file if it exists
<code>'b'</code>	binary mode
<code>'t'</code>	text mode (default)
<code>'+'</code>	open a disk file for updating (reading and writing)
<code>'U'</code>	universal newline mode (deprecated)

The default mode is `'rt'` (open for reading text). For binary random access, the mode `'w+b'` opens and truncates the file to 0 bytes, while `'r+b'` opens the file without truncation. The `'x'` mode implies `'w'` and raises an `FileExistsError` if the file already exists.

Python distinguishes between files opened in binary and text modes, even when the underlying operating system doesn't. Files opened in binary mode (appending `'b'` to the mode argument) return contents as bytes objects without any decoding. In text mode (the default, or when `'t'` is appended to the mode argument), the contents of the file are returned as strings, the bytes having been first decoded using a platform-dependent encoding or using the specified encoding if given.

`'U'` mode is deprecated and will raise an exception in future versions of Python. It has no effect in Python 3. Use `newline` to control universal newlines mode.

`buffering` is an optional integer used to set the buffering policy. Pass 0 to switch buffering off (only allowed in binary mode), 1 to select line buffering (only usable in text mode), and an integer `> 1` to indicate the size of a fixed-size chunk buffer. When no buffering argument is given, the default buffering policy works as follows:

- Binary files are buffered in fixed-size chunks; the size of the buffer is chosen using a heuristic trying to determine the underlying device's "block size" and falling back on `io.DEFAULT_BUFFER_SIZE`. On many systems, the buffer will typically be 4096 or 8192 bytes long.
- "Interactive" text files (files for which `isatty()` returns `True`) use line buffering. Other text files use the policy described above for binary files.

`encoding` is the name of the encoding used to decode or encode the file. This should only be used in text mode. The default encoding is platform dependent, but any encoding supported by Python can be passed. See the `codecs` module for the list of supported encodings.

`errors` is an optional string that specifies how encoding errors are to be handled—this argument should not be used in binary mode. Pass `'strict'` to raise a `ValueError` exception if there is an encoding error (the default of `None` has the same effect), or pass `'ignore'` to ignore errors. (Note that ignoring encoding errors can lead to data loss.) See the documentation for `codecs.register` or run `'help(codecs.Codec)'` for a list of the permitted encoding error strings.

`newline` controls how universal newlines works (it only applies to text mode). It can be `None`, `''`, `'n'`, `'r'`, and `'rn'`. It works as follows:

- On input, if `newline` is `None`, universal newlines mode is enabled. Lines in the input can end in `'n'`, `'r'`, or `'rn'`, and these are translated into `'n'` before being returned to the caller. If it is `"`, universal newline mode is enabled, but line endings are returned to the caller untranslating. If it has any of the other legal values, input lines are only terminated by the given string, and the line ending is returned to the caller untranslating.
- On output, if `newline` is `None`, any `'n'` characters written are translated to the system default line separator, `os.linesep`. If `newline` is `"` or `'n'`, no translation takes place. If `newline` is any of the other legal values, any `'n'` characters written are translated to the given string.

If `closefd` is `False`, the underlying file descriptor will be kept open when the file is closed. This does not work when a file name is given and must be `True` in that case.

A custom opener can be used by passing a callable as *opener*. The underlying file descriptor for the file object is then obtained by calling *opener* with (*file*, *flags*). *opener* must return an open file descriptor (passing `os.open` as *opener* results in functionality similar to passing `None`).

`open()` returns a file object whose type depends on the mode, and through which the standard file operations such as reading and writing are performed. When `open()` is used to open a file in a text mode (`'w'`, `'r'`, `'wt'`, `'rt'`, etc.), it returns a `TextIOWrapper`. When used to open a file in a binary mode, the returned class varies: in read binary mode, it returns a `BufferedReader`; in write binary and append binary modes, it returns a `BufferedWriter`, and in read/write mode, it returns a `BufferedRandom`.

It is also possible to use a string or bytearray as a file for both reading and writing. For strings `StringIO` can be used like a file opened in a text mode, and for bytes a `BytesIO` can be used like a file opened in a binary mode.

`_os_chmod ()`

Change the access permissions of a file.

path

Path to be modified. May always be specified as a `str`, `bytes`, or a path-like object. On some platforms, `path` may also be specified as an open file descriptor. If this functionality is unavailable, using it raises an exception.

mode

Operating-system mode bitfield.

dir_fd

If not `None`, it should be a file descriptor open to a directory, and `path` should be relative; `path` will then be relative to that directory.

follow_symlinks

If `False`, and the last element of the `path` is a symbolic link, `chmod` will modify the symbolic link itself instead of the file the link points to.

It is an error to use `dir_fd` or `follow_symlinks` when specifying `path` as

an open file descriptor.

`dir_fd` and `follow_symlinks` may not be implemented on your platform.

If they are unavailable, using them will raise a `NotImplementedError`.

`_os_chown ()`

Change the owner and group id of `path` to the numeric uid and gid.

path

Path to be examined; can be `string`, `bytes`, a path-like object, or open-file-descriptor `int`.

dir_fd

If not `None`, it should be a file descriptor open to a directory, and `path` should be relative; `path` will then be relative to that directory.

follow_symlinks

If `False`, and the last element of the `path` is a symbolic link, `stat` will examine the symbolic link itself instead of the file the link points to.

`path` may always be specified as a `string`. On some platforms, `path` may also be specified as an open file descriptor.

If this functionality is unavailable, using it raises an exception.

If `dir_fd` is not `None`, it should be a file descriptor open to a directory,

and path should be relative; path will then be relative to that directory.

If `follow_symlinks` is `False`, and the last element of the path is a symbolic

link, `chown` will modify the symbolic link itself instead of the file the link points to.

It is an error to use `dir_fd` or `follow_symlinks` when specifying path as

an open file descriptor.

`dir_fd` and `follow_symlinks` may not be implemented on your platform.

If they are unavailable, using them will raise a `NotImplementedError`.

`_os_rename ()`

Rename a file or directory.

If either `src_dir_fd` or `dst_dir_fd` is not `None`, it should be a file

descriptor open to a directory, and the respective path string (`src` or `dst`) should be relative; the path will then be relative to that directory.

`src_dir_fd` and `dst_dir_fd`, may not be implemented on your platform.

If they are unavailable, using them will raise a `NotImplementedError`.

`_os_unlink ()`

Remove a file (same as `remove()`).

If `dir_fd` is not `None`, it should be a file descriptor open to a directory,

and path should be relative; path will then be relative to that directory.

`dir_fd` may not be implemented on your platform.

If it is unavailable, using it will raise a `NotImplementedError`.

`static _pickle_dump ()`

Write a pickled representation of `obj` to the open file object `file`.

This is equivalent to `Pickler(file, protocol).dump(obj)`, but may be more efficient.

The optional `protocol` argument tells the pickler to use the given protocol supported protocols are 0, 1, 2, 3 and 4. The default protocol is 3; a backward-incompatible protocol designed for Python 3.

Specifying a negative protocol version selects the highest protocol version supported. The higher the protocol used, the more recent the version of Python needed to read the pickle produced.

The `file` argument must have a `write()` method that accepts a single bytes argument. It can thus be a file object opened for binary writing, an `io.BytesIO` instance, or any other custom object that meets this interface.

If `fix_imports` is `True` and `protocol` is less than 3, pickle will try to map the new Python 3 names to the old module names used in Python 2, so that the pickle data stream is readable with Python 2.

`_pickle_protocol = 4`

`_shutil_copyfile (dst, *, follow_symlinks=True)`

Copy data from `src` to `dst`.

If `follow_symlinks` is not set and `src` is a symbolic link, a new symlink will be created instead of copying the file it points to.

`_time_time ()`

`time()` -> floating point number

Return the current time in seconds since the Epoch. Fractions of a second may be present if the system clock provides them.

`close ()`

`has_key (key)`

`iterkeys ()`

`keys ()`

`sync ()`

```
SCons.dblite.open (file, flag=None, mode=438)
```

SCons.exitfuncs module

SCons.exitfuncs

Register functions which are executed when SCons exits for any reason.

```
SCons.exitfuncs._run_exitfuncs ()
```

run any registered exit functions

_exithandlers is traversed in reverse order so functions are executed last in, first out.

```
SCons.exitfuncs.register (func, *targs, **kargs)
```

register a function to be executed upon normal program termination

func - function to be called at exit targs - optional arguments to pass to func kargs - optional keyword arguments to pass to func

SCons.compat package

Module contents

SCons compatibility package for old Python versions

This subpackage holds modules that provide backwards-compatible implementations of various things that we'd like to use in SCons but which only show up in later versions of Python than the early, old version(s) we still support.

Other code will not generally reference things in this package through the SCons.compat namespace. The modules included here add things to the builtins namespace or the global module list so that the rest of our code can use the objects and names imported here regardless of Python version.

The rest of the things here will be in individual compatibility modules that are either: 1) suitably modified copies of the future modules that we want to use; or 2) backwards compatible re-implementations of the specific portions of a future module's API that we want to use.

GENERAL WARNINGS: Implementations of functions in the SCons.compat modules are *NOT* guaranteed to be fully compliant with these functions in later versions of Python. We are only concerned with adding functionality that we actually use in SCons, so be wary if you lift this code for other uses. (That said, making these more nearly the same as later, official versions is still a desirable goal, we just don't need to be obsessive about it.)

We name the compatibility modules with an initial '_scons_' (for example, _scons_subprocess.py is our compatibility module for subprocess) so that we can still try to import the real module name and fall back to our compatibility module if we get an ImportError. The import_as() function defined below loads the module as the "real" name (without the '_scons_'), after which all of the "import {module}" statements in the rest of our code will find our pre-loaded compatibility module.

```
class SCons.compat.NoSlotsPyPy
```

Bases: **type**

Metaclass for PyPy compatibility.

PyPy does not work well with __slots__ and __class__ assignment.

```
    mro ()
```

Return a type's method resolution order.

```
SCons.compat.rename_module (new, old)
```

Attempt to import the old module and load it under the new name. Used for purely cosmetic name changes in Python 3.x.

SCons.Node package

Submodules

SCons.Node.Alias module

scons.Node.Alias

Alias nodes.

This creates a hash of global Aliases (dummy targets).

```
class SCons.Node.Alias.Alias (name)
```

```
  Bases: SCons.Node.Node
```

```
  class Attrs
```

```
    Bases: object
```

```
    shared
```

```
  BuildInfo
```

```
    alias of AliasBuildInfo
```

```
  Decider (function)
```

```
  GetTag (key)
```

```
    Return a user-defined tag.
```

```
  NodeInfo
```

```
    alias of AliasNodeInfo
```

```
  Tag (key, value)
```

```
    Add a user-defined tag.
```

```
  _add_child (collection, set, child)
```

```
    Adds 'child' to 'collection', first checking 'set' to see if it's already present.
```

```
  _children_get ()
```

```
  _children_reset ()
```

```
  _func_exists
```

```
  _func_get_contents
```

```
  _func_is_derived
```

```
  _func_rexists
```

```
  _func_target_from_source
```

```
  _get_scanner (env, initial_scanner, root_node_scanner, kw)
```

```
  _memo
```

```
  _specific_sources
```

```
  _tags
```

```
  add_dependency (depend)
```

Adds dependencies.

add_ignore (depend)

Adds dependencies to ignore.

add_prerequisite (prerequisite)

Adds prerequisites

add_source (source)

Adds sources.

add_to_implicit (deps)

add_to_waiting_parents (node)

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

add_to_waiting_s_e (node)

add_wkid (wkid)

Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

Return a list of all the node's direct children.

alter_targets ()

Return a list of alternate targets for this Node.

always_build

attributes

binfo

build ()

A "builder" for aliases.

builder

builder_set (builder)

built ()

Called just after this node is successfully built.

cached

changed (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build

children (*scan=1*)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

convert ()

del_binfo ()

Delete the build info from this node.

depends

depends_set

disambiguate (*must_exist=None*)

env

env_set (*env, safe=0*)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exist?

explain ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

get_abspath ()

Return an absolute path to the Node. This will return simply `str(Node)` by default, but for Node types that have a concept of relative path, this might return something different.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected
cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path(scanner)

Fetch the appropriate scanner path for this node.

get_builder(default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig()

get_contents()

The contents of an alias is the concatenation of the content signatures of all its sources.

get_csig()

Generate a node's content signature, the digested signature of its content.

node - the node cache - alternate node to use for the signature cache returns - the content signature

get_env()

get_env_scanner(env, kw={})

get_executor(create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes(env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps(env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_ninfo()

get_source_scanner(node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state()

get_stored_implicit()

Fetch the stored implicit dependencies

get_stored_info()

get_string(for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself

has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()

get_target_scanner ()

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore

ignore_set

implicit

implicit_set

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The `SCons.Node.Alias` and `SCons.Node.Python.Value` subclasses rebind their `current()` method to this method.

linked

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

really_build (kw)**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the `prepare()` method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

ref_count

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: `built()` and `File.release_target_info()`

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

sconsign ()

An Alias is not recorded in .sconsign files

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_state (state)

side_effect

side_effects

sources

sources_set

state

store_info

SCons.Node package

str_for_display ()

target_peers

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

wkids

class SCons.Node.Alias.AliasBuildInfo

Bases: **SCons.Node.BuildInfoBase**

bact

bactsig

bdepends

bdependsigs

bimplicit

bimplicitSIGs

bsources

bsourcesigs

current_version_id = 2

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a '`__dict__`' slot is added, it should be updated instead of replaced.

class SCons.Node.Alias.AliasNameSpace (kwargs)**

Bases: **collections.UserDict**

Alias (name, **kw)

__MutableMapping__marker = <object object>

__abc_impl = <_abc_data object>

clear () → None. Remove all items from D.

copy ()

classmethod fromkeys (iterable, value=None)

get (k[, d]) → D[k] if k in D, else d. d defaults to None.

items () → a set-like object providing a view on D's items

keys () → a set-like object providing a view on D's keys

lookup (name, **kw)

pop (*k*, *d*) → *v*, remove specified key and return the corresponding value.

If *k* is not found, *d* is returned if given, otherwise `KeyError` is raised.

popitem () → (*k*, *v*), remove and return some (key, value) pair

as a 2-tuple; but raise `KeyError` if *D* is empty.

setdefault (*k*, *d*) → *D*.get(*k*,*d*), also set *D*[*k*]=*d* if *k* not in *D*

update (*E*, *F*) → `None`. Update *D* from mapping/iterable *E* and *F*.

If *E* present and has a `.keys()` method, does: for *k* in *E*: *D*[*k*] = *E*[*k*] If *E* present and lacks `.keys()` method, does: for (*k*, *v*) in *E*: *D*[*k*] = *v* In either case, this is followed by: for *k*, *v* in *F*.items(): *D*[*k*] = *v*

values () → an object providing a view on *D*'s values

`class SCons.Node.Alias.AliasNodeInfo`

Bases: `SCons.Node.NodeInfoBase`

convert (*node*, *val*)

csig

current_version_id = 2

field_list = ['csig']

format (*field_list*=None, *names*=0)

merge (*other*)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

str_to_node (*s*)

update (*node*)

SCons.Node.FS module

`scons.Node.FS`

File system nodes.

These Nodes represent the canonical external objects that people think of when they think of building software: files and directories.

This holds a `"default_fs"` variable that should be initialized with an FS that can be used by scripts or modules looking for the canonical default.

`class SCons.Node.FS.Base` (*name*, *directory*, *fs*)

Bases: `SCons.Node.Node`

A generic class for file system entries. This class is for when we don't know yet whether the entry being looked up is a file or a directory. Instances of this class can morph into either `Dir` or `File` objects by a later, more precise lookup.

Note: this class does not define `__cmp__` and `__hash__` for efficiency reasons. SCons does a lot of comparing of `Node.FS.{Base,Entry,File,Dir}` objects, so those operations must be as fast as possible, which means we want to use Python's built-in object identity comparisons.

`class Attrs`

Bases: `object`

shared

BuildInfo

alias of `SCons.Node.BuildInfoBase`

Decider (function)

GetTag (key)

Return a user-defined tag.

NodeInfo

alias of `SCons.Node.NodeInfoBase`

RDirs (pathlist)

Search for a list of directories in the Repository list.

Rfindalldirs (pathlist)

Return all of the directories for a given path list, including corresponding “backing” directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

Tag (key, value)

Add a user-defined tag.

`_Rfindalldirs_key` (pathlist)

`_abspath`

`_add_child` (collection, set, child)

Adds ‘child’ to ‘collection’, first checking ‘set’ to see if it’s already present.

`_children_get` ()

`_children_reset` ()

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_sconsign`

`_func_target_from_source`

`_get_scanner` (env, initial_scanner, root_node_scanner, kw)

`_get_str` ()

`_glob1` (pattern, ondisk=True, source=False, strings=False)

`_labspath`

`_local`

`_memo`

`_path`

`_path_elements`

`_proxy`

`_save_str ()`

`_specific_sources`

`_tags`

`_tpath`

`add_dependency (depend)`

Adds dependencies.

`add_ignore (depend)`

Adds dependencies to ignore.

`add_prerequisite (prerequisite)`

Adds prerequisites

`add_source (source)`

Adds sources.

`add_to_implicit (deps)`

`add_to_waiting_parents (node)`

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

`add_to_waiting_s_e (node)`

`add_wkid (wkid)`

Add a node to the list of kids waiting to be evaluated

`all_children (scan=1)`

Return a list of all the node's direct children.

`alter_targets ()`

Return a list of alternate targets for this Node.

`always_build`

`attributes`

`binfo`

`build (kw)`**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the `prepare()` method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

`builder`

`builder_set (builder)`

`built ()`

Called just after this node is successfully built.

`cached`

`changed (node=None, allowcache=False)`

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build

children (scan=1)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

cwd

del_binfo ()

Delete the build info from this node.

depends

depends_set

dir

disambiguate (must_exist=None)

duplicate

env

env_set (env, safe=0)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exist?

explain ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the __str__() method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of str() to avoid unnecessary rebuilds. This method does not need

to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs

Reference to parent Node.FS object

get_abspath ()

Get the absolute path of the file.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()

get_contents ()

Fetch the contents of the entry.

get_csig ()

get_dir ()

get_env ()

get_env_scanner (env, kw={})

get_executor (create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()

get_labspath ()

Get the absolute path of the file.

get_ninfo ()

get_path (dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()**get_source_scanner (node)**

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()**get_stored_implicit ()**

Fetch the stored implicit dependencies

get_stored_info ()**get_string (for_signature)**

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()**get_target_scanner ()****get_tpath ()****getmtime ()****getsize ()****has_builder ()**

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if node.builder: ..."). When the builder attribute is examined directly, it ends up calling __getattr__ for both the __len__ and __nonzero__ attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.**has_explicit_builder ()**

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore**ignore_set****implicit****implicit_set**

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when duplicate=0 and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

Default check for whether the Node is current: unknown Node subtypes are always out of date, so they will always get built.

isdir ()

isfile ()

islink ()

linked

lstat ()

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if node.builder: ..."). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

ref_count

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_local ()

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_src_builder (builder)

Set the source code builder for this node.

set_state (state)

side_effect

side_effects

sources

sources_set

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcnode ()

If this node is in a build path, return the node corresponding to its source file. Otherwise, return ourself.

stat ()

state

store_info

str_for_display ()

target_from_source (prefix, suffix, splitext=<function splitext>)

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix. Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

wkids

class SCons.Node.FS.Dir (name, directory, fs)

Bases: SCons.Node.FS.Base

A class for directories in a file system.

class Attrs

Bases: object

shared

BuildInfo

alias of DirBuildInfo

Decider (function)

Dir (name, create=True)

Looks up or creates a directory node named 'name' relative to this directory.

Entry (name)

Looks up or creates an entry node named 'name' relative to this directory.

File (name)

Looks up or creates a file node named 'name' relative to this directory.

GetTag (key)

Return a user-defined tag.

NodeInfo

alias of DirNodeInfo

RDirs (pathlist)

Search for a list of directories in the Repository list.

Rfindalldirs (pathlist)

Return all of the directories for a given path list, including corresponding "backing" directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

Tag (key, value)

Add a user-defined tag.

_Dir__clearRepositoryCache (duplicate=None)

Called when we change the repository(ies) for a directory. This clears any cached information that is invalidated by changing the repository.

_Dir__resetDuplicate (node)

`_Rfindalldirs_key (pathlist)`

`_abspath`

`_add_child (collection, set, child)`

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

`_children_get ()`

`_children_reset ()`

`_create ()`

Create this directory, silently and without worrying about whether the builder is the default or not.

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_sconsign`

`_func_target_from_source`

`_get_scanner (env, initial_scanner, root_node_scanner, kw)`

`_get_str ()`

`_glob1 (pattern, ondisk=True, source=False, strings=False)`

Globs for and returns a list of entry names matching a single pattern in this directory.

This searches any repositories and source directories for corresponding entries and returns a Node (or string) relative to the current directory if an entry is found anywhere.

TODO: handle pattern with no wildcard

`_labspath`

`_local`

`_memo`

`_morph ()`

Turn a file system Node (either a freshly initialized directory object or a separate Entry object) into a proper directory object.

Set up this directory's entries and hook it into the file system tree. Specify that directories (this Node) don't use signatures for calculating whether they're current.

`_path`

`_path_elements`

`_proxy`

`_rel_path_key (other)`

`_save_str ()`

`_sconsign`

`_specific_sources`

_srcdir_find_file_key(filename)**_tags****_tpath****addRepository**(dir)**add_dependency**(depend)

Adds dependencies.

add_ignore(depend)

Adds dependencies to ignore.

add_prerequisite(prerequisite)

Adds prerequisites

add_source(source)

Adds sources.

add_to_implicit(deps)**add_to_waiting_parents**(node)

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

add_to_waiting_s_e(node)**add_wkid**(wkid)

Add a node to the list of kids waiting to be evaluated

all_children(scan=1)

Return a list of all the node's direct children.

alter_targets()

Return any corresponding targets in a variant directory.

always_build**attributes****binfo****build**(*kw)

A null "builder" for directories.

builder**builder_set**(builder)**built**()

Called just after this node is successfully built.

cached**cachedir_csig****cachesig****changed**(node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build

children (scan=1)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

contentsig

cwd

del_binfo ()

Delete the build info from this node.

depends

depends_set

dir

dir_on_disk (name)

dirname

disambiguate (must_exist=None)

diskcheck_match ()

do_duplicate (src)

duplicate

entries

entry_abspath (name)

entry_exists_on_disk (name)

Searches through the file/dir entries of the current directory, and returns True if a physical entry with the given name could be found.

@see reentry_exists_on_disk

entry_labspath (name)

entry_path (name)

entry_tpath (name)

env

env_set (env, safe=0)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()

file_on_disk (name)

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs

getRepositories ()

Returns a list of repositories for this directory.

get_abspath ()

Get the absolute path of the file.

get_all_rdirs ()

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()

get_contents ()

Return content signatures and names of all our children separated by new-lines. Ensure that the nodes are sorted.

get_csig ()

Compute the content signature for Directory nodes. In general, this is not needed and the content signature is not stored in the DirNodeInfo. However, if `get_contents` on a Dir node is called which has a child directory, the child directory should return the hash of its contents.

get_dir ()**get_env ()****get_env_scanner (env, kw={})****get_executor (create=1)**

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return this directory's implicit dependencies.

We don't bother caching the results because the scan typically shouldn't be requested more than once (as opposed to scanning .h file contents, which can be requested as many times as the files is #included by other files).

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()**get_labspath ()**

Get the absolute path of the file.

get_ninfo ()**get_path (dir=None)**

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()**get_source_scanner (node)**

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies `self.has_builder()` is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()**get_stored_implicit ()**

Fetch the stored implicit dependencies

get_stored_info ()**get_string (for_signature)**

This is a convenience function designed primarily to be used in command generators (i.e., `CommandGeneratorActions` or Environment variables that are callable), which are called with a `for_signature` argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to `str(Node)` when converting a Node to a string, passing in the `for_signature` parameter, such that we will call `Node.for_signature()` or `str(Node)` properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a `__getattr__()` method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

`get_suffix ()`

`get_target_scanner ()`

`get_text_contents ()`

We already emit things in text, so just return the binary version.

`get_timestamp ()`

Return the latest timestamp from among our children

`get_tpath ()`

`getmtime ()`

`getsize ()`

`glob (pathname, ondisk=True, source=False, strings=False, exclude=None)`

Returns a list of Nodes (or strings) matching a specified pathname pattern.

Pathname patterns follow UNIX shell semantics: `*` matches any-length strings of any characters, `?` matches any character, and `[]` can enclose lists or ranges of characters. Matches do not span directory separators.

The matches take into account Repositories, returning local Nodes if a corresponding entry exists in a Repository (either an in-memory Node or something on disk).

By default, the `glob()` function matches entries that exist on-disk, in addition to in-memory Nodes. Setting the “`ondisk`” argument to `False` (or some other non-true value) causes the `glob()` function to only match in-memory Nodes. The default behavior is to return both the on-disk and in-memory Nodes.

The “`source`” argument, when true, specifies that corresponding source Nodes must be returned if you’re globbing in a build directory (initialized with `VariantDir()`). The default behavior is to return Nodes local to the `VariantDir()`.

The “`strings`” argument, when true, returns the matches as strings, not Nodes. The strings are path names relative to this directory.

The “`exclude`” argument, if not `None`, must be a pattern or a list of patterns following the same UNIX shell semantics. Elements matching a least one pattern of this list will be excluded from the result.

The underlying algorithm is adapted from the `glob.glob()` function in the Python library (but heavily modified), and uses `fnmatch()` under the covers.

`has_builder ()`

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if `node.builder: ...`”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

`has_explicit_builder ()`

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

`ignore`

`ignore_set`

`implicit`

`implicit_set`

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when duplicate=0 and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

If any child is not up-to-date, then this directory isn't, either.

isdir ()

isfile ()

islink ()

link (srcdir, duplicate)

Set this directory as the variant directory for the supplied source directory.

linked

lstat ()

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if node.builder: ..."). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

on_disk_entries

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

rdir ()

ref_count

rel_path (other)

Return a path to "other" relative to this directory.

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

released_target_info

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

reentry_exists_on_disk (name)

Searches through the file/dir entries of the current *and* all its remote directories (repos), and returns True if a physical entry with the given name could be found. The local directory (self) gets searched first, so repositories take a lower precedence regarding the searching order.

@see entry_exists_on_disk

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

reexists ()

Does this node exist locally or in a repository?

rfile ()

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

A directory does not get scanned.

scanner_paths

sconsign ()

Return the .sconsign file info for this directory.

searched

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_local ()

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_src_builder (builder)

Set the source code builder for this node.

set_state (state)

side_effect

side_effects

sources

sources_set

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcdir

srcdir_duplicate (name)

srcdir_find_file (filename)

srcdir_list ()

srcnode ()

Dir has a special need for srcnode()...if we have a srcdir attribute set, then that *is* our srcnode.

stat ()

state

store_info

str_for_display ()

target_from_source (prefix, suffix, splitext=<function splitext>)

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix.

Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers

up ()

variant_dirs

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

walk (func, arg)

Walk this directory tree by calling the specified function for each directory in the tree.

This behaves like the `os.path.walk()` function, but for in-memory `Node.FS.Dir` objects. The function takes the same arguments as the functions passed to `os.path.walk()`:

func(arg, dirname, fnames)

Except that “dirname” will actually be the directory *Node*, not the string. The ‘.’ and ‘..’ entries are excluded from frames. The frames list may be modified in-place to filter the subdirectories visited or otherwise impose a specific order. The “arg” argument is always passed to func() and may be used in any way (or ignored, passing None is common).

wkids

```
class SCons.Node.FS.DirBuildInfo
  Bases: SCons.Node.BuildInfoBase
```

bact

bactsig

bdepends

bdependsigs

bimplicit

bimplicitSIGs

bsources

bsourcesigs

current_version_id = 2

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance’s data. WARNING: If a ‘__dict__’ slot is added, it should be updated instead of replaced.

```
class SCons.Node.FS.DirNodeInfo
  Bases: SCons.Node.NodeInfoBase
```

convert (node, val)

current_version_id = 2

format (field_list=None, names=0)

fs = None

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance’s data. WARNING: If a ‘__dict__’ slot is added, it should be updated instead of replaced.

str_to_node (s)

update (node)

```
class SCons.Node.FS.DiskChecker (type, do, ignore)
  Bases: object
```

set (list)

```
class SCons.Node.FS.Entry (name, directory, fs)
  Bases: SCons.Node.FS.Base
```

This is the class for generic Node.FS entries—that is, things that could be a File or a Dir, but we’re just not sure yet. Consequently, the methods in this class really exist just to transform their associated object into the right class when the time comes, and then call the same-named method in the transformed class.

`class Attrs`

Bases: `object`

`shared`

`BuildInfo`

alias of `SCons.Node.BuildInfoBase`

`Decider` (function)

`GetTag` (key)

Return a user-defined tag.

`NodeInfo`

alias of `SCons.Node.NodeInfoBase`

`RDirs` (pathlist)

Search for a list of directories in the Repository list.

`Rfindalldirs` (pathlist)

Return all of the directories for a given path list, including corresponding “backing” directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

`Tag` (key, value)

Add a user-defined tag.

`_Rfindalldirs_key` (pathlist)

`_abspath`

`_add_child` (collection, set, child)

Adds ‘child’ to ‘collection’, first checking ‘set’ to see if it’s already present.

`_children_get` ()

`_children_reset` ()

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_sconsign`

`_func_target_from_source`

`_get_scanner` (env, initial_scanner, root_node_scanner, kw)

`_get_str` ()

`_glob1` (pattern, ondisk=True, source=False, strings=False)

`_labspath`

`_local`

`_memo`

`_path`

`_path_elements`

`_proxy`

`_save_str ()`

`_sconsign`

`_specific_sources`

`_tags`

`_tpath`

`add_dependency (depend)`
Adds dependencies.

`add_ignore (depend)`
Adds dependencies to ignore.

`add_prerequisite (prerequisite)`
Adds prerequisites

`add_source (source)`
Adds sources.

`add_to_implicit (deps)`

`add_to_waiting_parents (node)`
Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

`add_to_waiting_s_e (node)`

`add_wkid (wkid)`
Add a node to the list of kids waiting to be evaluated

`all_children (scan=1)`
Return a list of all the node's direct children.

`alter_targets ()`
Return a list of alternate targets for this Node.

`always_build`

`attributes`

`binfo`

`build (**kw)`
Actually build the node.
This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the `prepare()` method has gotten everything, uh, prepared.
This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

`builder`

builder_set (builder)**built** ()

Called just after this node is successfully built.

cached**cachedir_csig****cachesig****changed** (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build**children** (scan=1)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()**contentsig****cwd****del_binfo** ()

Delete the build info from this node.

depends**depends_set****dir****dirname****disambiguate** (must_exist=None)**diskcheck_match** ()**duplicate****entries**

env

env_set (env, safe=0)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs

get_abspath ()

Get the absolute path of the file.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()

get_contents ()

Fetch the contents of the entry. Returns the exact binary contents of the file.

get_csig ()

get_dir ()

get_env ()

get_env_scanner (env, kw={})

get_executor (create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()

get_labspath ()

Get the absolute path of the file.

get_ninfo ()

get_path (dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()

get_stored_implicit ()

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()

get_target_scanner ()

get_text_contents ()

Fetch the decoded text contents of a Unicode encoded Entry.

Since this should return the text contents from the file system, we check to see into what sort of subclass we should morph this Entry.

get_tpath ()

getmtime ()

getsize ()

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore

ignore_set

implicit

implicit_set

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when `duplicate=0` and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

Default check for whether the Node is current: unknown Node subtypes are always out of date, so they will always get built.

isdir ()

isfile ()

islink ()

linked

lstat ()

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

Called to make sure a Node is a Dir. Since we’re an Entry, we can morph into one.

name

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

on_disk_entries

postprocess ()

Clean up anything we don’t need to hang onto after we’ve been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

ref_count

rel_path (other)

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren’t needed any longer after a Node (=File) got built, we don’t have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: `built()` and `File.release_target_info()`

released_target_info

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

We're a generic Entry, but the caller is actually looking for a File at this point, so morph into one.

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

scanner_paths

searched

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_local ()

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

```

set_precious (precious=1)
    Set the Node's precious value.

set_pseudo (pseudo=True)
    Set the Node's precious value.

set_specific_source (source)

set_src_builder (builder)
    Set the source code builder for this node.

set_state (state)

side_effect

side_effects

sources

sources_set

src_builder ()
    Fetch the source code builder for this node.
    If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value
    from its parent directory, and so on up to the file system root).

srcdir

srcnode ()
    If this node is in a build path, return the node corresponding to its source file. Otherwise, return ourself.

stat ()

state

store_info

str_for_display ()

target_from_source (prefix, suffix, splitext=<function splitext>)
    Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix.
    Note that this method can be overridden dynamically for generated files that need different behavior. See
    Tool/swig.py for an example.

target_peers

variant_dirs

visited ()
    Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

wkids

class SCons.Node.FS.EntryProxy (subject)
    Bases: SCons.Util.Proxy

    EntryProxy__get_abspath ()

```

`__EntryProxy__get_base_path ()`

Return the file's directory and file name, with the suffix stripped.

`__EntryProxy__get_dir ()`

`__EntryProxy__get_file ()`

`__EntryProxy__get_filebase ()`

`__EntryProxy__get_posix_path ()`

Return the path with / as the path separator, regardless of platform.

`__EntryProxy__get_rsrcdir ()`

Returns the directory containing the source node linked to this node via VariantDir(), or the directory of this node if not linked.

`__EntryProxy__get_rsrcnode ()`

`__EntryProxy__get_srcdir ()`

Returns the directory containing the source node linked to this node via VariantDir(), or the directory of this node if not linked.

`__EntryProxy__get_srcnode ()`

`__EntryProxy__get_suffix ()`

`__EntryProxy__get_windows_path ()`

Return the path with as the path separator, regardless of platform.

```
dictSpecialAttrs = {'abspath': <function EntryProxy.__get_abspath>, 'base': <function
EntryProxy.__get_base_path>, 'dir': <function EntryProxy.__get_dir>, 'file': <function EntryProxy.__get_file>,
'filebase': <function EntryProxy.__get_filebase>, 'posix': <function EntryProxy.__get_posix_path>, 'rsrcdir':
<function EntryProxy.__get_rsrcdir>, 'srcpath': <function EntryProxy.__get_rsrcnode>, 'srcdir': <function
EntryProxy.__get_srcdir>, 'srcpath': <function EntryProxy.__get_srcnode>, 'suffix': <function
EntryProxy.__get_suffix>, 'win32': <function EntryProxy.__get_windows_path>, 'windows': <function
EntryProxy.__get_windows_path>}
```

`get ()`

Retrieve the entire wrapped object

exception `SCons.Node.FS.EntryProxyAttributeError (entry_proxy, attribute)`

Bases: `AttributeError`

An `AttributeError` subclass for recording and displaying the name of the underlying `Entry` involved in an `AttributeError` exception.

`args`

`with_traceback ()`

`Exception.with_traceback(tb)` – set `self.__traceback__` to `tb` and return `self`.

class `SCons.Node.FS.FS (path=None)`

Bases: `SCons.Node.FS.LocalFS`

`Dir (name, directory=None, create=True)`

Look up or create a `Dir` node with the specified name. If the name is a relative path (begins with `.`, `../`, or a file name), then it is looked up relative to the supplied directory node, or to the top level directory of the `FS` (supplied at construction time) if no directory is supplied.

This method will raise `TypeError` if a normal file is found at the specified path.

`Entry (name, directory=None, create=1)`

Look up or create a generic Entry node with the specified name. If the name is a relative path (begins with ./, ../, or a file name), then it is looked up relative to the supplied directory node, or to the top level directory of the FS (supplied at construction time) if no directory is supplied.

File (name, directory=None, create=1)

Look up or create a File node with the specified name. If the name is a relative path (begins with ./, ../, or a file name), then it is looked up relative to the supplied directory node, or to the top level directory of the FS (supplied at construction time) if no directory is supplied.

This method will raise TypeError if a directory is found at the specified path.

Glob (pathname, ondisk=True, source=True, strings=False, exclude=None, cwd=None)

Globs

This is mainly a shim layer

PyPackageDir (modulename)

Locate the directory of a given python module name

For example scons might resolve to Windows: C:Python27Libsite-packages\sscons-2.5.1 Linux: /usr/lib/scons

This can be useful when we want to determine a toolpath based on a python module name

Repository (*dirs)

Specify Repository directories to search.

VariantDir (variant_dir, src_dir, duplicate=1)

Link the supplied variant directory to the source directory for purposes of building files.

_lookup (p, directory, fsclass, create=1)

The generic entry point for Node lookup with user-supplied data.

This translates arbitrary input into a canonical Node.FS object of the specified fsclass. The general approach for strings is to turn it into a fully normalized absolute path and then call the root directory's lookup_abs() method for the heavy lifting.

If the path name begins with '#', it is unconditionally interpreted relative to the top-level directory of this FS. '#' is treated as a synonym for the top-level SConstruct directory, much like '~' is treated as a synonym for the user's home directory in a UNIX shell. So both '#foo' and './foo' refer to the 'foo' subdirectory underneath the top-level SConstruct directory.

If the path name is relative, then the path is looked up relative to the specified directory, or the current directory (self._cwd, typically the SConstruct directory) if the specified directory is None.

chdir (dir, change_os_dir=0)

Change the current working directory for lookups. If change_os_dir is true, we will also change the "real" cwd to match.

chmod (path, mode)

copy (src, dst)

copy2 (src, dst)

exists (path)

get_max_drift ()

get_root (drive)

Returns the root directory for the specified drive, creating it if necessary.

getcwd ()

getmtime (path)

getsize (path)

isdir (path)

SCons.Node package

isfile (path)

islink (path)

link (src, dst)

listdir (path)

lstat (path)

makedirs (path)

mkdir (path)

open (path)

readlink (file)

rename (old, new)

set_SConstruct_dir (dir)

set_max_drift (max_drift)

stat (path)

symlink (src, dst)

unlink (path)

variant_dir_target_climb (orig, dir, tail)

Create targets in corresponding variant directories

Climb the directory tree, and look up path names relative to any linked variant directories we find.

Even though this loops and walks up the tree, we don't memoize the return value because this is really only used to process the command-line targets.

class **SCons.Node.FS.File** (name, directory, fs)

Bases: **SCons.Node.FS.Base**

A class for files in a file system.

class **Attrs**

Bases: **object**

shared

BuildInfo

alias of **FileBuildInfo**

Decider (function)

Dir (name, create=True)

Create a directory node named 'name' relative to the directory of this file.

Dirs (pathlist)

Create a list of directories relative to the SConscript directory of this file.

Entry (name)

Create an entry node named 'name' relative to the directory of this file.

File (name)

Create a file node named 'name' relative to the directory of this file.

GetTag (key)

Return a user-defined tag.

NodeInfo

alias of **FileNodeInfo**

RDirs (pathlist)

Search for a list of directories in the Repository list.

Rfindalldirs (pathlist)

Return all of the directories for a given path list, including corresponding “backing” directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

Tag (key, value)

Add a user-defined tag.

`_File__dmap_cache = {}`

`_File__dmap_sig_cache = {}`

`_Rfindalldirs_key (pathlist)`

`_abspath`

`_add_child (collection, set, child)`

Adds ‘child’ to ‘collection’, first checking ‘set’ to see if it’s already present.

`_add_strings_to_dependency_map (dmap)`

In the case comparing node objects isn’t sufficient, we’ll add the strings for the nodes to the dependency map :return:

`_build_dependency_map (binfo)`

Build mapping from file -> signature

Parameters:

- - **self** (*self*) –
- - **buildinfo from node being considered** (*binfo*) –

Returns: dictionary of file->signature mappings

`_children_get ()`

`_children_reset ()`

`_createDir ()`

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_sconsign`

`_func_target_from_source`

`_get_found_includes_key (env, scanner, path)`

`_get_previous_signatures (dmap)`

Return a list of corresponding csigs from previous build in order of the node/files in children.

Parameters:

- - **self** (*self*) –
- - **Dictionary of file -> csig** (*dmap*) –

Returns: List of csigs for provided list of children

`_get_scanner (env, initial_scanner, root_node_scanner, kw)`

`_get_str ()`

`_glob1 (pattern, ondisk=True, source=False, strings=False)`

`_labspath`

`_local`

`_memo`

`_morph ()`

Turn a file system node into a File object.

`_path`

`_path_elements`

`_proxy`

`_rmv_existing ()`

`_save_str ()`

`_sconsign`

`_specific_sources`

`_tags`

`_tpath`

`add_dependency (depend)`

Adds dependencies.

`add_ignore (depend)`

Adds dependencies to ignore.

`add_prerequisite (prerequisite)`

Adds prerequisites

`add_source (source)`

Adds sources.

`add_to_implicit (deps)`

`add_to_waiting_parents (node)`

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

`add_to_waiting_s_e (node)`

add_wkid (wkid)

Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

Return a list of all the node's direct children.

alter_targets ()

Return any corresponding targets in a variant directory.

always_build

attributes

binfo

build (kw)**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the prepare() method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

builder

builder_set (builder)

built ()

Called just after this File node is successfully built.

Just like for 'release_target_info' we try to release some more target node attributes in order to minimize the overall memory consumption.

@see: release_target_info

cached

cachedir_csig

cachesig

changed (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built.

For File nodes this is basically a wrapper around Node.changed(), but we allow the return value to get cached after the reference to the Executor got released in release_target_info().

@see: Node.changed()

changed_content (target, prev_ni, repo_node=None)

changed_since_last_build

changed_state (target, prev_ni, repo_node=None)

changed_timestamp_match (target, prev_ni, repo_node=None)

Return True if the timestamps don't match or if there is no previous timestamp :param target: :param prev_ni: Information about the node from the previous build :return:

changed_timestamp_newer (target, prev_ni, repo_node=None)

changed_timestamp_then_content (target, prev_ni, node=None)

Used when decider for file is Timestamp-MD5

NOTE: If the timestamp hasn't changed this will skip md5'ing the

file and just copy the `prev_ni` provided. If the `prev_ni` is wrong. It will propagate it. See: <https://github.com/SCons/scons/issues/2980>

Parameters:

- - **dependency** (*self*) –
- - **target** (*target*) –
- - **The NodeInfo object loaded from previous builds** `.sconsign` (*prev_ni*) –
- - **Node instance. Check this node for file existence/timestamp** (*node*) – if specified.

Returns: Boolean - Indicates if node(File) has changed.

children (*scan=1*)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The `SCons.Node.Alias` and `SCons.Node.Python.Value` subclasses rebind their `current()` method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()**contentsig**

`convert_copy_attrs = ['bsources', 'bimplicit', 'bdepends', 'bact', 'bactsig', 'ninfo']`

`convert_old_entry (old_entry)`

`convert_sig_attrs = ['bsourcesigs', 'bimplicitsigs', 'bdependsigs']`

cwd**del_binfo** ()

Delete the build info from this node.

depends**depends_set****dir****dirname**

`disambiguate (must_exist=None)`

`diskcheck_match` ()

`do_duplicate (src)`

duplicate**entries****env**

`env_set (env, safe=0)`

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()

find_repo_file ()

For this node, find if there exists a corresponding file in one or more repositories :return: list of corresponding files in repositories

find_src_builder ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs

get_abspath ()

Get the absolute path of the file.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_bsig ()

Return the signature for a cached file, including its children.

It adds the path of the cached file to the cache signature, because multiple targets built by the same action will all have the same build signature, and we have to differentiate them somehow.

Signature should normally be string of hex digits.

get_cachedir_csig ()

Fetch a Node's content signature for purposes of computing another Node's cachesig.

This is a wrapper around the normal `get_csig()` method that handles the somewhat obscure case of using `CacheDir` with the `-n` option. Any files that don't exist would normally be "built" by fetching them from the cache, but the normal `get_csig()` method will try to open up the local file, which doesn't exist because the `-n` option meant we didn't actually pull the file from `cachedir`. But since the file *does* actually exist in the `cachedir`, we can use its contents for the `csig`.

get_content_hash ()

Compute and return the MD5 hash for this file.

get_contents ()

Fetch the contents of the entry.

get_contents_sig ()

A helper method for `get_cachedir_bsig`.

It computes and returns the signature for this node's contents.

get_csig ()

Generate a node's content signature, the digested signature of its content.

node - the node cache - alternate node to use for the signature cache returns - the content signature

get_dir ()

get_env ()

get_env_scanner (env, kw={})

get_executor (create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the included implicit dependencies in this file. Cache results so we only scan the file once per path regardless of how many times this information is requested.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path ()

get_labspath ()

Get the absolute path of the file.

get_max_drift_csig ()

Returns the content signature currently stored for this node if it's been unmodified longer than the `max_drift` value, or the `max_drift` value is 0. Returns None otherwise.

get_ninfo ()

get_path (dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements ()

get_size ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies `self.has_builder()` is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()

get_stored_implicit ()

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., `CommandGeneratorActions` or Environment variables that are callable), which are called with a `for_signature` argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to `str(Node)` when converting a `Node` to a string, passing in the `for_signature` parameter, such that we will call `Node.for_signature()` or `str(Node)` properly, depending on whether we are calculating a signature or actually constructing a command line.

`get_subst_proxy ()`

This method is expected to return an object that will function exactly like this `Node`, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some `Nodes` would like to implement a `__getattr__()` method, but putting that in the `Node` type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

`get_suffix ()`

`get_target_scanner ()`

`get_text_contents ()`

This attempts to figure out what the encoding of the text is based upon the BOM bytes, and then decodes the contents so that it's a valid python string.

`get_timestamp ()`

`get_tpath ()`

`getmtime ()`

`getsize ()`

`has_builder ()`

Return whether this `Node` has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if `node.builder: ...`”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

`has_explicit_builder ()`

Return whether this `Node` has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

`has_src_builder ()`

Return whether this `Node` has a source builder or not.

If this `Node` doesn't have an explicit source code builder, this is where we figure out, on the fly, if there's a transparent source code builder for it.

Note that if we found a source builder, we also set the `self.builder` attribute, so that all of the methods that actually *build* this file don't have to do anything different.

`ignore`

`ignore_set`

`implicit`

`implicit_set`

`includes`

`is_derived ()`

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when duplicate=0 and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

Check for whether the Node is current In all cases self is the target we're checking to see if it's up to date

isdir ()

isfile ()

islink ()

linked

lstat ()

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

md5_chunksize = 64

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if node.builder: ..."). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

on_disk_entries

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this file to be created.

prerequisites

pseudo

push_to_cache ()

Try to push the node into a cache

ref_count

rel_path (other)

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

We'd like to remove a lot more attributes like self.sources and self.sources_set, but they might get used in a next build step. For example, during configuration the source files for a built E{*}.o file are used to figure out which linker to use for the resulting Program (gcc vs. g++)! That's why we check for the 'keep_targetinfo' attribute, config Nodes and the Interactive mode just don't allow an early release of most variables.

In the same manner, we can't simply remove the self.attributes here. The smart linking relies on the shared flag, and some parts of the java Tool use it to transport information about nodes...

@see: built() and Node.release_target_info()

released_target_info

remove ()

Remove this file.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

scanner_paths

searched

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_local ()

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_src_builder (builder)

Set the source code builder for this node.

set_state (state)

side_effect

side_effects

sources

sources_set

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcdir

srcnode ()

If this node is in a build path, return the node corresponding to its source file. Otherwise, return ourself.

stat ()

state

store_info

str_for_display ()

target_from_source (prefix, suffix, splitext=<function splitext>)

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix. Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers

variant_dirs

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

wkids

class SCons.Node.FS.FileBuildInfo

Bases: **SCons.Node.BuildInfoBase**

This is info loaded from sconsign.

Attributes unique to FileBuildInfo:

dependency_map : *Caches file->csig mapping*

for all dependencies. Currently this is only used when using MD5-timestamp decider. It's used to ensure that we copy the correct csig from the previous build to be written to .sconsign when current build is done. Previously the matching of csig to file was strictly by order they appeared in bdepends, bsources, or bimplicit, and so a change in order or count of any of these could yield writing wrong csig, and then false positive rebuilds

bact

bactsig

bdepends

bdependsigns

bimplicit

bimplicitsigns

bsources

bsourcesigns

convert_from_sconsign (dir, name)

Converts a newly-read FileBuildInfo object for in-SCons use

For normal up-to-date checking, we don't have any conversion to perform—but we're leaving this method here to make that clear.

convert_to_sconsign ()

Converts this FileBuildInfo object for writing to a .sconsign file

This replaces each Node in our various dependency lists with its usual string representation: relative to the top-level SConstruct directory, or an absolute path if it's outside.

current_version_id = 2

dependency_map

format (names=0)

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

prepare_dependencies ()

Prepares a FileBuildInfo object for explaining what changed

The bsources, bdepends and bimplicit lists have all been stored on disk as paths relative to the top-level SConstruct directory. Convert the strings to actual Nodes (for use by the `-debug=explain` code and `-implicit-cache`).

exception SCons.Node.FS.FileBuildInfoFileToCsigMappingError

Bases: **Exception**

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

class SCons.Node.FS.FileFinder

Bases: **object**

_find_file_key (filename, paths, verbose=None)

filedir_lookup (p, fd=None)

A helper method for find_file() that looks up a directory for a file we're trying to find. This only creates the Dir Node if it exists on-disk, since if the directory doesn't exist we know we won't find any files in it... :-)

It would be more compact to just use this as a nested function with a default keyword argument (see the commented-out version below), but that doesn't work unless you have nested scopes, so we define it here just so this work under Python 1.5.2.

find_file (filename, paths, verbose=None)

Find a node corresponding to either a derived file or a file that exists already.

Only the first file found is returned, and none is returned if no file is found.

filename: A filename to find paths: A list of directory path *nodes* to search in. Can be represented as a list, a tuple, or a callable that is called with no arguments and returns the list or tuple.

returns The node created from the found file.

class SCons.Node.FS.FileNodeInfo

Bases: **SCons.Node.NodeInfoBase**

convert (node, val)

csig

current_version_id = 2

field_list = ['csig', 'timestamp', 'size']

format (field_list=None, names=0)

SCons.Node package

fs = None

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a `'__dict__'` slot is added, it should be updated instead of replaced.

size

str_to_node (s)

timestamp

update (node)

`SCons.Node.FS.LinkFunc` (target, source, env)

Relative paths cause problems with symbolic links, so we use absolute paths, which may be a problem for people who want to move their soft-linked src-trees around. Those people should use the 'hard-copy' mode, softlinks cannot be used for that; at least I have no idea how ...

`class SCons.Node.FS.LocalFS`

Bases: **object**

This class implements an abstraction layer for operations involving a local file system. Essentially, this wraps any function in the `os`, `os.path` or `shutil` modules that we use to actually go do anything with or to the local file system.

Note that there's a very good chance we'll refactor this part of the architecture in some way as we really implement the interface(s) for remote file system Nodes. For example, the right architecture might be to have this be a subclass instead of a base class. Nevertheless, we're using this as a first step in that direction.

We're not using `chdir()` yet because the calling subclass method needs to use `os.chdir()` directly to avoid recursion. Will we really need this one?

chmod (path, mode)

copy (src, dst)

copy2 (src, dst)

exists (path)

getmtime (path)

getsize (path)

isdir (path)

isfile (path)

islink (path)

link (src, dst)

listdir (path)

lstat (path)

makedirs (path)

mkdir (path)

open (path)

readlink (file)

SCons.Node package

rename (old, new)

stat (path)

symlink (src, dst)

unlink (path)

SCons.Node.FS.**LocalString** (target, source, env)

SCons.Node.FS.**MkdirFunc** (target, source, env)

class SCons.Node.FS.**RootDir** (drive, fs)

Bases: SCons.Node.FS.**Dir**

A class for the root directory of a file system.

This is the same as a Dir class, except that the path separator ('/' or "\") is actually part of the name, so we don't need to add a separator when creating the path names of entries within this directory.

class **Attrs**

Bases: **object**

shared

BuildInfo

alias of **DirBuildInfo**

Decider (function)

Dir (name, create=True)

Looks up or creates a directory node named 'name' relative to this directory.

Entry (name)

Looks up or creates an entry node named 'name' relative to this directory.

File (name)

Looks up or creates a file node named 'name' relative to this directory.

GetTag (key)

Return a user-defined tag.

NodeInfo

alias of **DirNodeInfo**

RDirs (pathlist)

Search for a list of directories in the Repository list.

Rfindalldirs (pathlist)

Return all of the directories for a given path list, including corresponding "backing" directories in any repositories. The Node lookups are relative to this Node (typically a directory), so memoizing result saves cycles from looking up the same path for each target in a given directory.

Tag (key, value)

Add a user-defined tag.

__Dir__clearRepositoryCache (duplicate=None)

Called when we change the repository(ies) for a directory. This clears any cached information that is invalidated by changing the repository.

__Dir__resetDuplicate (node)

__Rfindalldirs_key (pathlist)

`_abspath`

`_add_child (collection, set, child)`

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

`_children_get ()`

`_children_reset ()`

`_create ()`

Create this directory, silently and without worrying about whether the builder is the default or not.

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_sconsign`

`_func_target_from_source`

`_get_scanner (env, initial_scanner, root_node_scanner, kw)`

`_get_str ()`

`_glob1 (pattern, ondisk=True, source=False, strings=False)`

Globs for and returns a list of entry names matching a single pattern in this directory.

This searches any repositories and source directories for corresponding entries and returns a Node (or string) relative to the current directory if an entry is found anywhere.

TODO: handle pattern with no wildcard

`_labspath`

`_local`

`_lookupDict`

`_lookup_abs (p, klass, create=1)`

Fast (?) lookup of a *normalized* absolute path.

This method is intended for use by internal lookups with already-normalized path data. For general-purpose lookups, use the FS.Entry(), FS.Dir() or FS.File() methods.

The caller is responsible for making sure we're passed a normalized absolute path; we merely let Python's dictionary look up and return the One True Node.FS object for the path.

If a Node for the specified "p" doesn't already exist, and "create" is specified, the Node may be created after recursive invocation to find or create the parent directory or directories.

`_memo`

`_morph ()`

Turn a file system Node (either a freshly initialized directory object or a separate Entry object) into a proper directory object.

Set up this directory's entries and hook it into the file system tree. Specify that directories (this Node) don't use signatures for calculating whether they're current.

`_path`

`_path_elements`

`_proxy`

`_rel_path_key (other)`

`_save_str ()`

`_sconsign`

`_specific_sources`

`_srcdir_find_file_key (filename)`

`_tags`

`_tpath`

`abspath`

`addRepository (dir)`

`add_dependency (depend)`
Adds dependencies.

`add_ignore (depend)`
Adds dependencies to ignore.

`add_prerequisite (prerequisite)`
Adds prerequisites

`add_source (source)`
Adds sources.

`add_to_implicit (deps)`

`add_to_waiting_parents (node)`
Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not.
(Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

`add_to_waiting_s_e (node)`

`add_wkid (wkid)`
Add a node to the list of kids waiting to be evaluated

`all_children (scan=1)`
Return a list of all the node's direct children.

`alter_targets ()`
Return any corresponding targets in a variant directory.

`always_build`

`attributes`

`binfo`

`build (**kw)`
A null "builder" for directories.

`builder`

builder_set (builder)**built** ()

Called just after this node is successfully built.

cached**cachedir_csig****cachesig****changed** (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build**children** (scan=1)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()**contentsig****cwd****del_binfo** ()

Delete the build info from this node.

depends**depends_set****dir****dir_on_disk** (name)**dirname****disambiguate** (must_exist=None)**diskcheck_match** ()**do_duplicate** (src)

duplicate

entries

entry_abspath (name)

entry_exists_on_disk (name)

Searches through the file/dir entries of the current directory, and returns True if a physical entry with the given name could be found.

@see reentry_exists_on_disk

entry_labspath (name)

entry_path (name)

entry_tpath (name)

env

env_set (env, safe=0)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()

file_on_disk (name)

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

fs

Reference to parent Node.FS object

getRepositories ()

Returns a list of repositories for this directory.

get_abspath ()

Get the absolute path of the file.

get_all_rdirs ()

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path(scanner)

Fetch the appropriate scanner path for this node.

get_builder(default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig()

get_contents()

Return content signatures and names of all our children separated by new-lines. Ensure that the nodes are sorted.

get_csig()

Compute the content signature for Directory nodes. In general, this is not needed and the content signature is not stored in the DirNodeInfo. However, if `get_contents` on a Dir node is called which has a child directory, the child directory should return the hash of its contents.

get_dir()

get_env()

get_env_scanner(env, kw={})

get_executor(create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes(env, scanner, path)

Return this directory's implicit dependencies.

We don't bother caching the results because the scan typically shouldn't be requested more than once (as opposed to scanning .h file contents, which can be requested as many times as the files is #included by other files).

get_implicit_deps(env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_internal_path()

get_labspath()

Get the absolute path of the file.

get_ninfo()

get_path(dir=None)

Return path relative to the current working directory of the Node.FS.Base object that owns us.

get_path_elements()

get_source_scanner(node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies `self.has_builder()` is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state()

get_stored_implicit()

Fetch the stored implicit dependencies

get_stored_info()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., `CommandGeneratorActions` or Environment variables that are callable), which are called with a `for_signature` argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to `str(Node)` when converting a `Node` to a string, passing in the `for_signature` parameter, such that we will call `Node.for_signature()` or `str(Node)` properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this `Node`, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some `Nodes` would like to implement a `__getattr__()` method, but putting that in the `Node` type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()**get_target_scanner ()****get_text_contents ()**

We already emit things in text, so just return the binary version.

get_timestamp ()

Return the latest timestamp from among our children

get_tpath ()**getmtime ()****getsize ()****glob (pathname, ondisk=True, source=False, strings=False, exclude=None)**

Returns a list of `Nodes` (or strings) matching a specified pathname pattern.

Pathname patterns follow UNIX shell semantics: `*` matches any-length strings of any characters, `?` matches any character, and `[]` can enclose lists or ranges of characters. Matches do not span directory separators.

The matches take into account Repositories, returning local `Nodes` if a corresponding entry exists in a Repository (either an in-memory `Node` or something on disk).

By default, the `glob()` function matches entries that exist on-disk, in addition to in-memory `Nodes`. Setting the “`ondisk`” argument to `False` (or some other non-true value) causes the `glob()` function to only match in-memory `Nodes`. The default behavior is to return both the on-disk and in-memory `Nodes`.

The “`source`” argument, when true, specifies that corresponding source `Nodes` must be returned if you’re globbing in a build directory (initialized with `VariantDir()`). The default behavior is to return `Nodes` local to the `VariantDir()`.

The “`strings`” argument, when true, returns the matches as strings, not `Nodes`. The strings are path names relative to this directory.

The “`exclude`” argument, if not `None`, must be a pattern or a list of patterns following the same UNIX shell semantics. Elements matching a least one pattern of this list will be excluded from the result.

The underlying algorithm is adapted from the `glob.glob()` function in the Python library (but heavily modified), and uses `fnmatch()` under the covers.

has_builder ()

Return whether this `Node` has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if `node.builder: ...`”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this `Node` has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore

ignore_set

implicit

implicit_set

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when duplicate=0 and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

If any child is not up-to-date, then this directory isn't, either.

isdir ()

isfile ()

islink ()

link (srcdir, duplicate)

Set this directory as the variant directory for the supplied source directory.

linked

lstat ()

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if node.builder: ..."). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

must_be_same (klass)

This node, which already existed, is being looked up as the specified klass. Raise an exception if it isn't.

name

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

on_disk_entries

path

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

rdir ()

ref_count

rel_path (other)

Return a path to "other" relative to this directory.

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

released_target_info

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reentry ()

reentry_exists_on_disk (name)

Searches through the file/dir entries of the current *and* all its remote directories (repos), and returns True if a physical entry with the given name could be found. The local directory (self) gets searched first, so repositories take a lower precedence regarding the searching order.

@see entry_exists_on_disk

repositories

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

rfile ()

root

rstr ()

A Node.FS.Base object's string representation is its path name.

sbuilder

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

A directory does not get scanned.

scanner_paths

sconsign ()

Return the .sconsign file info for this directory.

searched

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_local ()

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_src_builder (builder)

Set the source code builder for this node.

set_state (state)

side_effect

side_effects

sources

sources_set

src_builder ()

Fetch the source code builder for this node.

If there isn't one, we cache the source code builder specified for the directory (which in turn will cache the value from its parent directory, and so on up to the file system root).

srcdir

srcdir_duplicate (name)

srcdir_find_file (filename)

srcdir_list ()

srcnode ()

Dir has a special need for srcnode()...if we have a srcdir attribute set, then that *is* our srcnode.

stat ()

state

store_info

str_for_display ()

target_from_source (prefix, suffix, splitext=<function splitext>)

Generates a target entry that corresponds to this entry (usually a source file) with the specified prefix and suffix.

Note that this method can be overridden dynamically for generated files that need different behavior. See Tool/swig.py for an example.

target_peers

up ()

variant_dirs

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents**waiting_s_e****walk** (func, arg)

Walk this directory tree by calling the specified function for each directory in the tree.

This behaves like the `os.path.walk()` function, but for in-memory `Node.FS.Dir` objects. The function takes the same arguments as the functions passed to `os.path.walk()`:

```
func(arg, dirname, fnames)
```

Except that “dirname” will actually be the directory *Node*, not the string. The ‘.’ and ‘..’ entries are excluded from fnames. The fnames list may be modified in-place to filter the subdirectories visited or otherwise impose a specific order. The “arg” argument is always passed to `func()` and may be used in any way (or ignored, passing `None` is common).

wkids`SCons.Node.FS.UnlinkFunc` (target, source, env)`class SCons.Node.FS._Null`Bases: `object``SCons.Node.FS._classEntry`alias of `SCons.Node.FS.Entry``SCons.Node.FS._copy_func` (fs, src, dest)`SCons.Node.FS._hardlink_func` (fs, src, dst)`SCons.Node.FS._my_normcase` (x)`SCons.Node.FS._my_splitdrive` (p)`SCons.Node.FS._softlink_func` (fs, src, dst)`SCons.Node.FS.diskcheck_types` ()`SCons.Node.FS.do_diskcheck_match` (node, predicate, errorfmt)`SCons.Node.FS.find_file` (filename, paths, verbose=None)

Find a node corresponding to either a derived file or a file that exists already.

Only the first file found is returned, and none is returned if no file is found.

filename: A filename to find paths: A list of directory path *nodes* to search in. Can be represented as a list, a tuple, or a callable that is called with no arguments and returns the list or tuple.

returns The node created from the found file.

`SCons.Node.FS.get_MkdirBuilder` ()`SCons.Node.FS.get_default_fs` ()`SCons.Node.FS.has_glob_magic` (s)`SCons.Node.FS.ignore_diskcheck_match` (node, predicate, errorfmt)`SCons.Node.FS.initialize_do_splitdrive` ()`SCons.Node.FS.invalidate_node_memos` (targets)

Invalidate the memoized values of all *Nodes* (files or directories) that are associated with the given entries. Has been added to clear the cache of nodes affected by a direct execution of an action (e.g. `Delete/Copy/Chmod`). Existing *Node* caches become inconsistent if the action is run through `Execute()`. The argument *targets* can be a single *Node* object or filename, or a sequence of *Nodes*/filenames.

`SCons.Node.FS.needs_normpath_match` ()

Matches zero or more characters at the beginning of the string.

`SCons.Node.FS.save_strings` (val)`SCons.Node.FS.sconsign_dir` (node)Return the `.sconsign` file info for this directory, creating it first if necessary.`SCons.Node.FS.sconsign_none` (node)

SCons.Node package

`SCons.Node.FS.set_diskcheck` (list)

`SCons.Node.FS.set_duplicate` (duplicate)

SCons.Node.Python module

`scons.Node.Python`

Python nodes.

`class SCons.Node.Python.Value` (value, built_value=None, name=None)

Bases: `SCons.Node.Node`

A class for Python variables, typically passed on the command line or generated by a script, but not from a file or some other source.

`class Attrs`

Bases: `object`

`shared`

`BuildInfo`

alias of `ValueBuildInfo`

`Decider` (function)

`GetTag` (key)

Return a user-defined tag.

`NodeInfo`

alias of `ValueNodeInfo`

`Tag` (key, value)

Add a user-defined tag.

`_add_child` (collection, set, child)

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

`_children_get` ()

`_children_reset` ()

`_func_exists`

`_func_get_contents`

`_func_is_derived`

`_func_rexists`

`_func_target_from_source`

`_get_scanner` (env, initial_scanner, root_node_scanner, kw)

`_memo`

`_specific_sources`

`_tags`

`add_dependency` (depend)

Adds dependencies.

add_ignore (depend)

Adds dependencies to ignore.

add_prerequisite (prerequisite)

Adds prerequisites

add_source (source)

Adds sources.

add_to_implicit (deps)

add_to_waiting_parents (node)

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

add_to_waiting_s_e (node)

add_wkid (wkid)

Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

Return a list of all the node's direct children.

alter_targets ()

Return a list of alternate targets for this Node.

always_build

attributes

binfo

build (kw)**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the prepare() method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

builder

builder_set (builder)

built ()

Called just after this node is successfully built.

cached

changed (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an #included .h file) is updated.

The allowcache option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this changed method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to changed().

@see: FS.File.changed(), FS.File.release_target_info()

changed_since_last_build

children (*scan=1*)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

del_binfo ()

Delete the build info from this node.

depends

depends_set

disambiguate (*must_exist=None*)

env

env_set (*env, safe=0*)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exist?

explain ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

get_abspath ()

Return an absolute path to the Node. This will return simply `str(Node)` by default, but for Node types that have a concept of relative path, this might return something different.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected
cache - alternate node to use for the signature cache returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path(scanner)

Fetch the appropriate scanner path for this node.

get_builder(default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig()

get_contents()

Get contents for signature calculations. :return: bytes

get_csig(calc=None)

Because we're a Python value node and don't have a real timestamp, we get to ignore the calculator and just use the value contents.

Returns string. Ideally string of hex digits. (Not bytes)

get_env()

get_env_scanner(env, kw={})

get_executor(create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes(env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps(env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_ninfo()

get_source_scanner(node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state()

get_stored_implicit()

Fetch the stored implicit dependencies

get_stored_info()

get_string(for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself

has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()

get_target_scanner ()

get_text_contents ()

By the assumption that the node.built_value is a deterministic product of the sources, the contents of a Value are the concatenation of all the contents of its sources. As the value need not be built when get_contents() is called, we cannot use the actual node.built_value.

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore

ignore_set

implicit

implicit_set

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when duplicate=0 and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_under (dir)

is_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The SCons.Node.Alias and SCons.Node.Python.Value subclasses rebind their current() method to this method.

linked

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()**multiple_side_effect_has_builder ()**

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

new_binfo ()**new_ninfo ()****ninfo****nocache****noclean****postprocess ()**

Clean up anything we don't need to hang onto after we've been built.

precious**prepare ()**

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites**pseudo****push_to_cache ()**

Try to push a node into a cache

read ()

Return the value. If necessary, the value is built.

ref_count**release_target_info ()**

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: `built()` and `File.release_target_info()`

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

reexists ()

Does this node exist locally or in a repository?

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

Set the Node's precious value.

set_specific_source (source)

set_state (state)

side_effect

side_effects

sources

sources_set

state

store_info

str_for_display ()

target_peers

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents**waiting_s_e****wkids****write (built_value)**

Set the value of the node.

class SCons.Node.Python.ValueBuildInfoBases: **SCons.Node.BuildInfoBase****bact****bactsig****bdepends****bdependsigs****bimplicit****bimplicitSIGs****bsources****bsourcesigs****current_version_id = 2****merge (other)**Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a '`__dict__`' slot is added, it should be updated instead of replaced.**class SCons.Node.Python.ValueNodeInfo**Bases: **SCons.Node.NodeInfoBase****convert (node, val)****csig****current_version_id = 2****field_list = ['csig']****format (field_list=None, names=0)****merge (other)**Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a '`__dict__`' slot is added, it should be updated instead of replaced.**str_to_node (s)****update (node)****SCons.Node.Python.ValueWithMemo (value, built_value=None, name=None)**

Memoized Value() node factory.

Module contents

SCons.Node

The Node package for the SCons software construction utility.

This is, in many ways, the heart of SCons.

A Node is where we encapsulate all of the dependency information about any thing that SCons can build, or about any thing which SCons can use to build some other thing. The canonical “thing,” of course, is a file, but a Node can also represent something remote (like a web page) or something completely abstract (like an Alias).

Each specific type of “thing” is specifically represented by a subclass of the Node base class: Node.FS.File for files, Node.Alias for aliases, etc. Dependency information is kept here in the base class, and information specific to files/aliases/etc. is in the subclass. The goal, if we’ve done this correctly, is that any type of “thing” should be able to depend on any other type of “thing.”

SCons.Node.**Annotate** (node)

class SCons.Node.**BuildInfoBase**

Bases: **object**

The generic base class for build information for a Node.

This is what gets stored in a .sconsign file for each target file. It contains a NodeInfo instance for this node (signature information that’s specific to the type of Node) and direct attributes for the generic build stuff we have to track: sources, explicit dependencies, implicit dependencies, and action information.

bact

bactsig

bdepends

bdependssigs

bimplicit

bimplicitssigs

bsources

bsourcesigs

current_version_id = 2

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance’s data. WARNING: If a ‘__dict__’ slot is added, it should be updated instead of replaced.

class SCons.Node.**Node**

Bases: **object**

The base Node class, for entities that we know how to build, or use to build other Nodes.

class **Attrs**

Bases: **object**

shared

BuildInfo

alias of **BuildInfoBase**

Decider (function)

GetTag (key)

Return a user-defined tag.

NodeInfo

alias of **NodeInfoBase**

Tag (key, value)

Add a user-defined tag.

_add_child (collection, set, child)

Adds 'child' to 'collection', first checking 'set' to see if it's already present.

_children_get ()

_children_reset ()

_func_exists

_func_get_contents

_func_is_derived

_func_rexists

_func_target_from_source

_get_scanner (env, initial_scanner, root_node_scanner, kw)

_memo

_specific_sources

_tags

add_dependency (depend)

Adds dependencies.

add_ignore (depend)

Adds dependencies to ignore.

add_prerequisite (prerequisite)

Adds prerequisites

add_source (source)

Adds sources.

add_to_implicit (deps)

add_to_waiting_parents (node)

Returns the number of nodes added to our waiting parents list: 1 if we add a unique waiting parent, 0 if not. (Note that the returned values are intended to be used to increment a reference count, so don't think you can "clean up" this function by using True and False instead...)

add_to_waiting_s_e (node)

add_wkid (wkid)

Add a node to the list of kids waiting to be evaluated

all_children (scan=1)

Return a list of all the node's direct children.

alter_targets ()

Return a list of alternate targets for this Node.

always_build

attributes

binfo

build (kw)**

Actually build the node.

This is called by the Taskmaster after it's decided that the Node is out-of-date and must be rebuilt, and after the `prepare()` method has gotten everything, uh, prepared.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in `built()`.

builder

builder_set (builder)

built ()

Called just after this node is successfully built.

cached

changed (node=None, allowcache=False)

Returns if the node is up-to-date with respect to the BuildInfo stored last time it was built. The default behavior is to compare it against our own previously stored BuildInfo, but the stored BuildInfo from another Node (typically one in a Repository) can be used instead.

Note that we now *always* check every dependency. We used to short-circuit the check by returning as soon as we detected any difference, but we now rely on checking every dependency to make sure that any necessary Node information (for example, the content signature of an `#included .h` file) is updated.

The `allowcache` option was added for supporting the early release of the executor/builder structures, right after a File target was built. When set to true, the return value of this `changed` method gets cached for File nodes. Like this, the executor isn't needed any longer for subsequent calls to `changed()`.

@see: `FS.File.changed()`, `FS.File.release_target_info()`

changed_since_last_build

children (scan=1)

Return a list of the node's direct children, minus those that are ignored by this node.

children_are_up_to_date ()

Alternate check for whether the Node is current: If all of our children were up-to-date, then this Node was up-to-date, too.

The `SCons.Node.Alias` and `SCons.Node.Python.Value` subclasses rebind their `current()` method to this method.

clear ()

Completely clear a Node of all its cached state (so that it can be re-evaluated by interfaces that do continuous integration builds).

clear_memoized_values ()

del_binfo ()

Delete the build info from this node.

depends

depends_set

disambiguate (must_exist=None)

env

env_set (env, safe=0)

executor

executor_cleanup ()

Let the executor clean up any cached information.

exists ()

Does this node exists?

explain ()

for_signature ()

Return a string representation of the Node that will always be the same for this particular Node, no matter what. This is by contrast to the `__str__()` method, which might, for instance, return a relative path for a file Node. The purpose of this method is to generate a value to be used in signature calculation for the command line used to build a target, and we use this method instead of `str()` to avoid unnecessary rebuilds. This method does not need to return something that would actually work in a command line; it can return any kind of nonsense, so long as it does not change.

get_abspath ()

Return an absolute path to the Node. This will return simply `str(Node)` by default, but for Node types that have a concept of relative path, this might return something different.

get_binfo ()

Fetch a node's build information.

node - the node whose sources will be collected
cache - alternate node to use for the signature cache
returns - the build signature

This no longer handles the recursive descent of the node's children's signatures. We expect that they're already built and updated by someone else, if that's what's wanted.

get_build_env ()

Fetch the appropriate Environment to build this node.

get_build_scanner_path (scanner)

Fetch the appropriate scanner path for this node.

get_builder (default_builder=None)

Return the set builder, or a specified default value

get_cachedir_csig ()

get_contents ()

Fetch the contents of the entry.

get_csig ()

get_env ()

get_env_scanner (env, kw={})

get_executor (create=1)

Fetch the action executor for this node. Create one if there isn't already one, and requested to do so.

get_found_includes (env, scanner, path)

Return the scanned include lines (implicit dependencies) found in this node.

The default is no implicit dependencies. We expect this method to be overridden by any subclass that can be scanned for implicit dependencies.

get_implicit_deps (env, initial_scanner, path_func, kw={})

Return a list of implicit dependencies for this node.

This method exists to handle recursive invocation of the scanner on the implicit dependencies returned by the scanner, if the scanner's recursive flag says that we should.

get_ninfo ()

get_source_scanner (node)

Fetch the source scanner for the specified node

NOTE: "self" is the target being built, "node" is the source file for which we want to fetch the scanner.

Implies self.has_builder() is true; again, expect to only be called from locations where this is already verified.

This function may be called very often; it attempts to cache the scanner found to improve performance.

get_state ()

get_stored_implicit ()

Fetch the stored implicit dependencies

get_stored_info ()

get_string (for_signature)

This is a convenience function designed primarily to be used in command generators (i.e., CommandGeneratorActions or Environment variables that are callable), which are called with a for_signature argument that is nonzero if the command generator is being called to generate a signature for the command line, which determines if we should rebuild or not.

Such command generators should use this method in preference to str(Node) when converting a Node to a string, passing in the for_signature parameter, such that we will call Node.for_signature() or str(Node) properly, depending on whether we are calculating a signature or actually constructing a command line.

get_subst_proxy ()

This method is expected to return an object that will function exactly like this Node, except that it implements any additional special features that we would like to be in effect for Environment variable substitution. The principle use is that some Nodes would like to implement a __getattr__() method, but putting that in the Node type itself has a tendency to kill performance. We instead put it in a proxy and return it from this method. It is legal for this method to return self if no new functionality is needed for Environment substitution.

get_suffix ()

get_target_scanner ()

has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly ("if node.builder: ..."). When the builder attribute is examined directly, it ends up calling __getattr__ for both the __len__ and __nonzero__ attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

has_explicit_builder ()

Return whether this Node has an explicit builder

This allows an internal Builder created by SCons to be marked non-explicit, so that it can be overridden by an explicit builder that the user supplies (the canonical example being directories).

ignore

ignore_set

implicit

implicit_set

includes

is_derived ()

Returns true if this node is derived (i.e. built).

This should return true only for nodes whose path should be in the variant directory when duplicate=0 and should contribute their build signatures when they are used as source files to other derived files. For example: source with source builders are not derived in this sense, and hence should not return true.

is_explicit

is_literal ()

Always pass the string representation of a Node to the command interpreter literally.

is_sconscript ()

Returns true if this node is an sconscript

is_up_to_date ()

Default check for whether the Node is current: unknown Node subtypes are always out of date, so they will always get built.

linked

make_ready ()

Get a Node ready for evaluation.

This is called before the Taskmaster decides if the Node is up-to-date or not. Overriding this method allows for a Node subclass to be disambiguated if necessary, or for an implicit source builder to be attached.

missing ()

multiple_side_effect_has_builder ()

Return whether this Node has a builder or not.

In Boolean tests, this turns out to be a *lot* more efficient than simply examining the builder attribute directly (“if node.builder: ...”). When the builder attribute is examined directly, it ends up calling `__getattr__` for both the `__len__` and `__nonzero__` attributes on instances of our Builder Proxy class(es), generating a bazillion extra calls and slowing things down immensely.

new_binfo ()

new_ninfo ()

ninfo

nocache

noclean

postprocess ()

Clean up anything we don't need to hang onto after we've been built.

precious

prepare ()

Prepare for this Node to be built.

This is called after the Taskmaster has decided that the Node is out-of-date and must be rebuilt, but before actually calling the method to build the Node.

This default implementation checks that explicit or implicit dependencies either exist or are derived, and initializes the BuildInfo structure that will hold the information about how this node is, uh, built.

(The existence of source files is checked separately by the Executor, which aggregates checks for all of the targets built by a specific action.)

Overriding this method allows for for a Node subclass to remove the underlying file from the file system. Note that subclass methods should call this base class method to get the child check and the BuildInfo structure.

prerequisites

pseudo

push_to_cache ()

Try to push a node into a cache

ref_count

release_target_info ()

Called just after this node has been marked up-to-date or was built completely.

This is where we try to release as many target node infos as possible for clean builds and update runs, in order to minimize the overall memory consumption.

By purging attributes that aren't needed any longer after a Node (=File) got built, we don't have to care that much how many KBytes a Node actually requires...as long as we free the memory shortly afterwards.

@see: built() and File.release_target_info()

remove ()

Remove this Node: no-op by default.

render_include_tree ()

Return a text representation, suitable for displaying to the user, of the include tree for the sources of this node.

reset_executor ()

Remove cached executor; forces recompute when needed.

retrieve_from_cache ()

Try to retrieve the node's content from a cache

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in built().

Returns true if the node was successfully retrieved.

rexists ()

Does this node exist locally or in a repository?

scan ()

Scan this node's dependents for implicit dependencies.

scanner_key ()

select_scanner (scanner)

Selects a scanner for this Node.

This is a separate method so it can be overridden by Node subclasses (specifically, Node.FS.Dir) that *must* use their own Scanner and don't select one the Scanner.Selector that's configured for the target.

set_always_build (always_build=1)

Set the Node's always_build value.

set_executor (executor)

Set the action executor for this node.

set_explicit (is_explicit)

set_nocache (nocache=1)

Set the Node's nocache value.

set_noclean (noclean=1)

Set the Node's noclean value.

set_precious (precious=1)

Set the Node's precious value.

set_pseudo (pseudo=True)

SCons.Node package

Set the Node's precious value.

set_specific_source (source)

set_state (state)

side_effect

side_effects

sources

sources_set

state

store_info

target_peers

visited ()

Called just after this node has been visited (with or without a build).

waiting_parents

waiting_s_e

wkids

class SCons.Node.NodeInfoBase

Bases: **object**

The generic base class for signature information for a Node.

Node subclasses should subclass NodeInfoBase to provide their own logic for dealing with their own Node-specific signature information.

convert (node, val)

current_version_id = 2

format (field_list=None, names=0)

merge (other)

Merge the fields of another object into this object. Already existing information is overwritten by the other instance's data. WARNING: If a '`__dict__`' slot is added, it should be updated instead of replaced.

update (node)

class SCons.Node.NodeList (initlist=None)

Bases: **collections.UserList**

__UserList__cast (other)

__abc_impl = *<_abc_data object>*

append (item)

S.append(value) – append value to the end of the sequence

clear () → None -- remove all items from S

copy ()

count (value) → integer -- return number of occurrences of value

extend (other)

S.extend(iterable) – extend sequence by appending elements from the iterable

index (value[, start[, stop]]) → integer -- return first index of value.

Raises ValueError if the value is not present.

Supporting start and stop arguments is optional, but recommended.

insert (i, item)

S.insert(index, value) – insert value before index

pop ([, index]) → item -- remove and return item at index (default last).

Raise IndexError if list is empty or index is out of range.

remove (item)

S.remove(value) – remove first occurrence of value. Raise ValueError if the value is not present.

reverse ()

S.reverse() – reverse *IN PLACE*

sort (*args, **kwargs)

class SCons.Node.Walker (node, kids_func=<function get_children>, cycle_func=<function ignore_cycle>, eval_func=<function do_nothing>)

Bases: **object**

An iterator for walking a Node tree.

This is depth-first, children are visited before the parent. The Walker object can be initialized with any node, and returns the next node on the descent with each `get_next()` call. `get` the children of a node instead of calling 'children'. 'cycle_func' is an optional function that will be called when a cycle is detected.

This class does not get caught in node cycles caused, for example, by C header file include loops.

get_next ()

Return the next node for this walk of the tree.

This function is intentionally iterative, not recursive, to sidestep any issues of stack size limitations.

is_done ()

SCons.Node.**changed_since_last_build_alias** (node, target, prev_ni, repo_node=None)

SCons.Node.**changed_since_last_build_entry** (node, target, prev_ni, repo_node=None)

SCons.Node.**changed_since_last_build_node** (node, target, prev_ni, repo_node=None)

Must be overridden in a specific subclass to return True if this Node (a dependency) has changed since the last time it was used to build the specified target. `prev_ni` is this Node's state (for example, its file timestamp, length, maybe content signature) as of the last time the target was built.

Note that this method is called through the dependency, not the target, because a dependency Node must be able to use its own logic to decide if it changed. For example, File Nodes need to obey if we're configured to use timestamps, but Python Value Nodes never use timestamps and always use the content. If this method were called through the target, then each Node's implementation of this method would have to have more complicated logic to handle all the different Node types on which it might depend.

SCons.Node.**changed_since_last_build_python** (node, target, prev_ni, repo_node=None)

SCons.Node.**changed_since_last_build_state_changed** (node, target, prev_ni, repo_node=None)

SCons.Node.**classname** (obj)

SCons.Node.**decide_source** (node, target, prev_ni, repo_node=None)

SCons.Node.**decide_target** (node, target, prev_ni, repo_node=None)

SCons.Node.**do_nothing** (node, parent)

SCons.Node.**do_nothing_node** (node)

SCons.Platform package

`SCons.Node.exists_always` (node)

`SCons.Node.exists_base` (node)

`SCons.Node.exists_entry` (node)

Return if the Entry exists. Check the file system to see what we should turn into first. Assume a file if there's no directory.

`SCons.Node.exists_file` (node)

`SCons.Node.exists_none` (node)

`SCons.Node.get_children` (node, parent)

`SCons.Node.get_contents_dir` (node)

Return content signatures and names of all our children separated by new-lines. Ensure that the nodes are sorted.

`SCons.Node.get_contents_entry` (node)

Fetch the contents of the entry. Returns the exact binary contents of the file.

`SCons.Node.get_contents_file` (node)

`SCons.Node.get_contents_none` (node)

`SCons.Node.ignore_cycle` (node, stack)

`SCons.Node.is_derived_node` (node)

Returns true if this node is derived (i.e. built).

`SCons.Node.is_derived_none` (node)

`SCons.Node.rexists_base` (node)

`SCons.Node.rexists_node` (node)

`SCons.Node.rexists_none` (node)

`SCons.Node.store_info_file` (node)

`SCons.Node.store_info_pass` (node)

`SCons.Node.target_from_source_base` (node, prefix, suffix, splitext)

`SCons.Node.target_from_source_none` (node, prefix, suffix, splitext)

SCons.Platform package

Submodules

SCons.Platform.aix module

`SCons.Platform.aix`

Platform-specific initialization for IBM AIX systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`SCons.Platform.aix.generate` (env)

`SCons.Platform.aix.get_xlc` (env, xlc=None, packages=[])

SCons.Platform.cygwin module

`SCons.Platform.cygwin`

Platform-specific initialization for Cygwin systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`SCons.Platform.cygwin.generate` (env)

SCons.Platform.darwin module

`SCons.Platform.darwin`

Platform-specific initialization for Mac OS X systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`SCons.Platform.darwin.generate` (env)

SCons.Platform.hpux module

`SCons.Platform.hpux`

Platform-specific initialization for HP-UX systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`SCons.Platform.hpux.generate` (env)

SCons.Platform.irix module

`SCons.Platform.irix`

Platform-specific initialization for SGI IRIX systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`SCons.Platform.irix.generate` (env)

SCons.Platform.mingw module

`SCons.Platform.mingw`

Platform-specific initialization for the MinGW system.

SCons.Platform.os2 module

`SCons.Platform.os2`

Platform-specific initialization for OS/2 systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`SCons.Platform.os2.generate` (env)

SCons.Platform.posix module

`SCons.Platform.posix`

Platform-specific initialization for POSIX (Linux, UNIX, etc.) systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic `SCons.Platform.Platform()` selection method.

`SCons.Platform.posix.escape` (arg)
escape shell special characters

`SCons.Platform.posix.exec_popen3` (l, env, stdout, stderr)

`SCons.Platform.posix.exec_subprocess` (l, env)

`SCons.Platform.posix.generate` (env)

SCons.Platform.package

SCons.Platform.posix.**piped_env_spawn** (sh, escape, cmd, args, env, stdout, stderr)

SCons.Platform.posix.**subprocess_spawn** (sh, escape, cmd, args, env)

SCons.Platform.sunos module

SCons.Platform.sunos

Platform-specific initialization for Sun systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

SCons.Platform.sunos.**generate** (env)

SCons.Platform.virtualenv module

SCons.Platform.virtualenv

Support for virtualenv.

SCons.Platform.virtualenv.**ImportVirtualenv** (env)

Copies virtualenv-related environment variables from OS environment to env['ENV'] and prepends virtualenv's PATH to env['ENV']['PATH'].

SCons.Platform.virtualenv.**IsInVirtualenv** (path)

Returns True, if **path** is under virtualenv's home directory. If not, or if we don't use virtualenv, returns False.

SCons.Platform.virtualenv.**Virtualenv** ()

Returns path to the virtualenv home if scons is executing within a virtualenv or None, if not.

SCons.Platform.virtualenv.**__enable_virtualenv_default** ()

SCons.Platform.virtualenv.**__ignore_virtualenv_default** ()

SCons.Platform.virtualenv.**__inject_venv_path** (env, path_list=None)

Modify environment such that SCons will take into account its virtualenv when running external tools.

SCons.Platform.virtualenv.**__inject_venv_variables** (env)

SCons.Platform.virtualenv.**__is_path_in** (path, base)

Returns true, if **path** is located under the **base** directory.

SCons.Platform.virtualenv.**__running_in_virtualenv** ()

Returns True, if scons is executed within a virtualenv

SCons.Platform.virtualenv.**select_paths_in_venv** (path_list)

Returns a list of paths from **path_list** which are under virtualenv's home directory.

SCons.Platform.win32 module

SCons.Platform.win32

Platform-specific initialization for Win32 systems.

There normally shouldn't be any need to import this module directly. It will usually be imported through the generic SCons.Platform.Platform() selection method.

class SCons.Platform.win32.**ArchDefinition** (arch, synonyms=[])

Bases: **object**

Determine which windows CPU were running on. A class for defining architecture-specific settings and logic.

SCons.Platform.win32.**escape** (x)

SCons.Platform.win32.**exec_spawn** (l, env)

SCons.Platform.win32.**generate** (env)

SCons.Platform.win32.**get_architecture** (arch=None)

Returns the definition for the specified architecture string.

If no string is specified, the system default is returned (as defined by the `PROCESSOR_ARCHITECTURE` or `PROCESSOR_ARCHITECTURE` environment variables).

`SCons.Platform.win32.get_program_files_dir ()`

Get the location of the program files directory

`SCons.Platform.win32.get_system_root ()`

`SCons.Platform.win32.piped_spawn (sh, escape, cmd, args, env, stdout, stderr)`

`SCons.Platform.win32.spawn (sh, escape, cmd, args, env)`

`SCons.Platform.win32.spawnve (mode, file, args, env)`

Module contents

`SCons.Platform`

SCons platform selection.

This looks for modules that define a callable object that can modify a construction environment as appropriate for a given platform.

Note that we take a more simplistic view of “platform” than Python does. We’re looking for a single string that determines a set of tool-independent variables with which to initialize a construction environment. Consequently, we’ll examine both `sys.platform` and `os.name` (and anything else that might come in to play) in order to return some specification which is unique enough for our purposes.

Note that because this subsystem just *selects* a callable that can modify a construction environment, it’s possible for people to define their own “platform specification” in an arbitrary callable function. No one needs to use or tie in to this subsystem in order to roll their own platform definition.

`SCons.Platform.DefaultToolList (platform, env)`

Select a default tool list for the specified platform.

`SCons.Platform.Platform (name='darwin')`

Select a canned Platform specification.

`class SCons.Platform.PlatformSpec (name, generate)`

Bases: `object`

`class SCons.Platform.TempFileMunge (cmd, cmdstr=None)`

Bases: `object`

Convert long command lines to use a temporary file.

You can set an Environment variable (usually `TEMPFILE`) to this, then call it with a string argument, and it will perform temporary file substitution on it. This is used to circumvent limitations on the length of command lines.

Example:

```
env["TEMPFILE"] = TempFileMunge
env["LINKCOM"] = "${TEMPFILE(' $LINK $TARGET $SOURCES ', '$LINKCOMSTR ')}"
```

By default, the name of the temporary file used begins with a prefix of '@'. This may be configured for other tool chains by setting the `TEMPFILEPREFIX` variable. Example:

```
env["TEMPFILEPREFIX"] = '-@'           # diab compiler
env["TEMPFILEPREFIX"] = '-via'        # arm tool chain
env["TEMPFILEPREFIX"] = ''            # (the empty string) PC Lint
```

You can configure the extension of the temporary file through the `TEMPFILESUFFIX` variable, which defaults to '.lnk' (see comments in the code below). Example:

```
env["TEMPFILESUFFIX"] = '.lnt'        # PC Lint
```

Entries in the temporary file are separated by the value of the `TEMPFILEARGJOIN` variable, which defaults to an OS-appropriate value.

`__print_cmd_str (target, source, env, cmdstr)`

`SCons.Platform.platform_default ()`

SCons.Scanner package

Return the platform string for our execution environment.

The returned value should map to one of the SCons/Platform/*.py files. Since scons is architecture independent, though, we don't care about the machine architecture.

`SCons.Platform.platform_module` (name='darwin')

Return the imported module for the platform.

This looks for a module name that matches the specified argument. If the name is unspecified, we fetch the appropriate default for our execution environment.

SCons.Scanner package

Submodules

SCons.Scanner.C module

SCons.Scanner.C

This module implements the dependency scanner for C/C++ code.

`SCons.Scanner.C.CConditionalScanner` ()

Return an advanced conditional Scanner instance for scanning source files

Interprets C/C++ Preprocessor conditional syntax (`#ifdef`, `#if`, `defined`, `#else`, `#elif`, etc.).

`SCons.Scanner.C.CScanner` ()

Return a prototype Scanner instance for scanning source files that use the C pre-processor

`class SCons.Scanner.C.SConsCPPConditionalScanner` (*args, **kw)

Bases: `SCons.cpp.PreProcessor`

SCons-specific subclass of the `cpp.py` module's processing.

We subclass this so that: 1) we can deal with files represented by Nodes, not strings; 2) we can keep track of the files that are missing.

`_do_if_else_condition` (condition)

Common logic for evaluating the conditions on `#if`, `#ifdef` and `#ifndef` lines.

`_match_tuples` (tuples)

`_parse_tuples` (contents)

`_process_tuples` (tuples, file=None)

`all_include` (t)

`do_define` (t)

Default handling of a `#define` line.

`do_elif` (t)

Default handling of a `#elif` line.

`do_else` (t)

Default handling of a `#else` line.

`do_endif` (t)

Default handling of a `#endif` line.

`do_if` (t)

Default handling of a `#if` line.

`do_ifdef` (t)

Default handling of a `#ifdef` line.

do_ifndef (t)

Default handling of a #ifndef line.

do_import (t)

Default handling of a #import line.

do_include (t)

Default handling of a #include line.

do_include_next (t)

Default handling of a #include line.

do_nothing (t)

Null method for when we explicitly want the action for a specific preprocessor directive to do nothing.

do_undef (t)

Default handling of a #undef line.

eval_expression (t)

Evaluates a C preprocessor expression.

This is done by converting it to a Python equivalent and eval()ing it in the C preprocessor namespace we use to track #define values.

finalize_result (fname)

find_include_file (t)

Finds the #include file for a given preprocessor tuple.

initialize_result (fname)

process_contents (contents)

Pre-processes a file contents.

Is used by tests

process_file (file)

Pre-processes a file.

This is the main internal entry point.

read_file (file)

resolve_include (t)

Resolve a tuple-ized #include line.

This handles recursive expansion of values without "" or <> surrounding the name until an initial " or < is found, to handle #include FILE where FILE is a #define somewhere else.

restore ()

Pops the previous dispatch table off the stack and makes it the current one.

save ()

Pushes the current dispatch table on the stack and re-initializes the current dispatch table to the default.

scons_current_file (t)

start_handling_includes (t=None)

Causes the PreProcessor object to start processing #import, #include and #include_next lines.

This method will be called when a #if, #ifdef, #ifndef or #elif evaluates True, or when we reach the #else in a #if, #ifdef, #ifndef or #elif block where a condition already evaluated False.

stop_handling_includes (t=None)

Causes the PreProcessor object to stop processing #import, #include and #include_next lines.

This method will be called when a `#if`, `#ifdef`, `#ifndef` or `#elif` evaluates False, or when we reach the `#else` in a `#if`, `#ifdef`, `#ifndef` or `#elif` block where a condition already evaluated True.

`tupleize (contents)`

Turns the contents of a file into a list of easily-processed tuples describing the CPP lines in the file.

The first element of each tuple is the line's preprocessor directive (`#if`, `#include`, `#define`, etc., minus the initial `#`). The remaining elements are specific to the type of directive, as pulled apart by the regular expression.

`class SCons.Scanner.C.SConsCPPConditionalScannerWrapper (name, variable)`

Bases: `object`

The SCons wrapper around a `cpp.py` scanner.

This is the actual glue between the calling conventions of generic SCons scanners, and the (subclass of) `cpp.py` class that knows how to look for `#include` lines with reasonably real C-preprocessor-like evaluation of `#if/#ifdef/#else/#elif` lines.

`recurse_nodes (nodes)`

`select (node)`

`class SCons.Scanner.C.SConsCPPScanner (*args, **kw)`

Bases: `SCons.cpp.PreProcessor`

SCons-specific subclass of the `cpp.py` module's processing.

We subclass this so that: 1) we can deal with files represented by Nodes, not strings; 2) we can keep track of the files that are missing.

`_do_if_else_condition (condition)`

Common logic for evaluating the conditions on `#if`, `#ifdef` and `#ifndef` lines.

`_match_tuples (tuples)`

`_parse_tuples (contents)`

`_process_tuples (tuples, file=None)`

`all_include (t)`

`do_define (t)`

Default handling of a `#define` line.

`do_elif (t)`

Default handling of a `#elif` line.

`do_else (t)`

Default handling of a `#else` line.

`do_endif (t)`

Default handling of a `#endif` line.

`do_if (t)`

Default handling of a `#if` line.

`do_ifdef (t)`

Default handling of a `#ifdef` line.

`do_ifndef (t)`

Default handling of a `#ifndef` line.

`do_import (t)`

Default handling of a `#import` line.

`do_include (t)`

Default handling of a #include line.

do_include_next (t)

Default handling of a #include line.

do_nothing (t)

Null method for when we explicitly want the action for a specific preprocessor directive to do nothing.

do_undef (t)

Default handling of a #undef line.

eval_expression (t)

Evaluates a C preprocessor expression.

This is done by converting it to a Python equivalent and eval()ing it in the C preprocessor namespace we use to track #define values.

finalize_result (fname)

find_include_file (t)

Finds the #include file for a given preprocessor tuple.

initialize_result (fname)

process_contents (contents)

Pre-processes a file contents.

Is used by tests

process_file (file)

Pre-processes a file.

This is the main internal entry point.

read_file (file)

resolve_include (t)

Resolve a tuple-ized #include line.

This handles recursive expansion of values without "" or <> surrounding the name until an initial " or < is found, to handle #include FILE where FILE is a #define somewhere else.

restore ()

Pops the previous dispatch table off the stack and makes it the current one.

save ()

Pushes the current dispatch table on the stack and re-initializes the current dispatch table to the default.

scons_current_file (t)

start_handling_includes (t=None)

Causes the PreProcessor object to start processing #import, #include and #include_next lines.

This method will be called when a #if, #ifdef, #ifndef or #elif evaluates True, or when we reach the #else in a #if, #ifdef, #ifndef or #elif block where a condition already evaluated False.

stop_handling_includes (t=None)

Causes the PreProcessor object to stop processing #import, #include and #include_next lines.

This method will be called when a #if, #ifdef, #ifndef or #elif evaluates False, or when we reach the #else in a #if, #ifdef, #ifndef or #elif block where a condition already evaluated True.

tupleize (contents)

Turns the contents of a file into a list of easily-processed tuples describing the CPP lines in the file.

The first element of each tuple is the line's preprocessor directive (#if, #include, #define, etc., minus the initial '#'). The remaining elements are specific to the type of directive, as pulled apart by the regular expression.

```
class SCons.Scanner.C.SConsCPPScannerWrapper (name, variable)
```

Bases: **object**

The SCons wrapper around a cpp.py scanner.

This is the actual glue between the calling conventions of generic SCons scanners, and the (subclass of) cpp.py class that knows how to look for #include lines with reasonably real C-preprocessor-like evaluation of #if/#ifdef/#else/#elif lines.

```
recurse_nodes (nodes)
```

```
select (node)
```

```
SCons.Scanner.C.dictify_CPPDEFINES (env)
```

SCons.Scanner.D module

SCons.Scanner.D

Scanner for the Digital Mars "D" programming language.

Coded by Andy Friesen 17 Nov 2003

```
class SCons.Scanner.D.D
```

Bases: **SCons.Scanner.Classic**

```
_recurse_all_nodes (nodes)
```

```
_recurse_no_nodes (nodes)
```

```
add_scanner (skey, scanner)
```

```
add_skey (skey)
```

Add a skey to the list of skeys

```
find_include (include, source_dir, path)
```

```
find_include_names (node)
```

```
get_skeys (env=None)
```

```
path (env, dir=None, target=None, source=None)
```

```
scan (node, path=())
```

```
select (node)
```

```
sort_key (include)
```

```
SCons.Scanner.D.DScanner ()
```

Return a prototype Scanner instance for scanning D source files

SCons.Scanner.Dir module

```
SCons.Scanner.Dir.DirEntryScanner (**kw)
```

Return a prototype Scanner instance for "scanning" directory Nodes for their in-memory entries

```
SCons.Scanner.Dir.DirScanner (**kw)
```

Return a prototype Scanner instance for scanning directories for on-disk files

```
SCons.Scanner.Dir.do_not_scan (k)
```

```
SCons.Scanner.Dir.only_dirs (nodes)
```

```
SCons.Scanner.Dir.scan_in_memory (node, env, path=())
```

"Scans" a Node.FS.Dir for its in-memory entries.

`SCons.Scanner.Dir.scan_on_disk` (node, env, path=())

Scans a directory for on-disk files and directories therein.

Looking up the entries will add these to the in-memory Node tree representation of the file system, so all we have to do is just that and then call the in-memory scanning function.

SCons.Scanner.Fortran module

`SCons.Scanner.Fortran`

This module implements the dependency scanner for Fortran code.

`class SCons.Scanner.Fortran.F90Scanner` (name, suffixes, path_variable, use_regex, incl_regex, def_regex, *args, **kw)

Bases: `SCons.Scanner.Classic`

A Classic Scanner subclass for Fortran source files which takes into account both USE and INCLUDE statements. This scanner will work for both F77 and F90 (and beyond) compilers.

Currently, this scanner assumes that the include files do not contain USE statements. To enable the ability to deal with USE statements in include files, add logic right after the module names are found to loop over each include file, search for and locate each USE statement, and append each module name to the list of dependencies. Caching the search results in a common dictionary somewhere so that the same include file is not searched multiple times would be a smart thing to do.

`_recurse_all_nodes` (nodes)

`_recurse_no_nodes` (nodes)

`add_scanner` (skey, scanner)

`add_skey` (skey)

Add a skey to the list of skeys

`find_include` (include, source_dir, path)

`find_include_names` (node)

`get_skeys` (env=None)

`path` (env, dir=None, target=None, source=None)

`scan` (node, env, path=())

`select` (node)

`sort_key` (include)

`SCons.Scanner.Fortran.FortranScan` (path_variable='FORTRANPATH')

Return a prototype Scanner instance for scanning source files for Fortran USE & INCLUDE statements

SCons.Scanner.IDL module

`SCons.Scanner.IDL`

This module implements the dependency scanner for IDL (Interface Definition Language) files.

`SCons.Scanner.IDL.IDLScan` ()

Return a prototype Scanner instance for scanning IDL source files

SCons.Scanner.LaTeX module

`SCons.Scanner.LaTeX`

This module implements the dependency scanner for LaTeX code.

```
class SCons.Scanner.LaTeX.FindENVPATHDirs (variable)
```

Bases: **object**

A class to bind a specific E{*}PATH variable name to a function that will return all of the E{*}path directories.

```
class SCons.Scanner.LaTeX.LaTeX (name, suffixes, graphics_extensions, *args, **kw)
```

Bases: **SCons.Scanner.Base**

Class for scanning LaTeX files for included files.

Unlike most scanners, which use regular expressions that just return the included file name, this returns a tuple consisting of the keyword for the inclusion (“include”, “includegraphics”, “input”, or “bibliography”), and then the file name itself. Based on a quick look at LaTeX documentation, it seems that we should append .tex suffix for the “include” keywords, append .tex if there is no extension for the “input” keyword, and need to add .bib for the “bibliography” keyword that does not accept extensions by itself.

Finally, if there is no extension for an “includegraphics” keyword latex will append .ps or .eps to find the file, while pdftex may use .pdf, .jpg, .tif, .mps, or .png.

The actual subset and search order may be altered by DeclareGraphicsExtensions command. This complication is ignored. The default order corresponds to experimentation with teTeX:

```
$ latex --version
pdfTeX 3.141592-1.21a-2.2 (Web2C 7.5.4)
kpathsea version 3.5.4
```

The order is:

[‘.eps’, ‘.ps’] for latex [‘.png’, ‘.pdf’, ‘.jpg’, ‘.tif’].

Another difference is that the search path is determined by the type of the file being searched: env[‘TEXINPUTS’] for “input” and “include” keywords env[‘TEXINPUTS’] for “includegraphics” keyword env[‘TEXINPUTS’] for “Istinputlisting” keyword env[‘BIBINPUTS’] for “bibliography” keyword env[‘BSTINPUTS’] for “bibliographystyle” keyword env[‘INDEXSTYLE’] for “makeindex” keyword, no scanning support needed just allows user to set it if needed.

FIXME: also look for the class or style in document[class|style]{} FIXME: also look for the argument of bibliographystyle{}

```
_latex_names (include_type, filename)
```

```
_recurse_all_nodes (nodes)
```

```
_recurse_no_nodes (nodes)
```

```
add_scanner (skey, scanner)
```

```
add_skey (skey)
```

Add a skey to the list of skeys

```
canonical_text (text)
```

Standardize an input TeX-file contents.

Currently:

- removes comments, unwrapping comment-wrapped lines.

```
env_variables = ['TEXINPUTS', 'BIBINPUTS', 'BSTINPUTS', 'INDEXSTYLE']
```

```
find_include (include, source_dir, path)
```

```
get_skeys (env=None)
```

```
keyword_paths = {'addbibresource': 'BIBINPUTS', 'addglobalbib': 'BIBINPUTS', 'addsectionbib': 'BIBINPUTS',
'bibliography': 'BIBINPUTS', 'bibliographystyle': 'BSTINPUTS', 'include': 'TEXINPUTS', 'includegraphics':
'TEXINPUTS', 'input': 'TEXINPUTS', 'Istinputlisting': 'TEXINPUTS', 'makeindex': 'INDEXSTYLE', 'usepackage':
'TEXINPUTS'}
```

```
path (env, dir=None, target=None, source=None)
```

SCons.Scanner package

scan (node, subdir=' . ')

scan_recurse (node, path=())

do a recursive scan of the top level target file This lets us search for included files based on the directory of the main file just as latex does

select (node)

sort_key (include)

two_arg_commands = ['import', 'subimport', 'includefrom', 'subincludefrom', 'inputfrom', 'subinputfrom']

SCons.Scanner.LaTeX.**LaTeXScanner** ()

Return a prototype Scanner instance for scanning LaTeX source files when built with latex.

SCons.Scanner.LaTeX.**PDFLaTeXScanner** ()

Return a prototype Scanner instance for scanning LaTeX source files when built with pdflatex.

class SCons.Scanner.LaTeX.**_Null**

Bases: **object**

SCons.Scanner.LaTeX.**_null**

alias of **SCons.Scanner.LaTeX._Null**

SCons.Scanner.LaTeX.**modify_env_var** (env, var, abspath)

SCons.Scanner.Prog module

SCons.Scanner.Prog.**ProgramScanner** (**kw)

Return a prototype Scanner instance for scanning executable files for static-lib dependencies

SCons.Scanner.Prog.**_subst_libs** (env, libs)

Substitute environment variables and split into list.

SCons.Scanner.Prog.**scan** (node, env, libpath=())

This scanner scans program files for static-library dependencies. It will search the LIBPATH environment variable for libraries specified in the LIBS variable, returning any files it finds as dependencies.

SCons.Scanner.RC module

SCons.Scanner.RC

This module implements the dependency scanner for RC (Interface Definition Language) files.

SCons.Scanner.RC.**RCScan** ()

Return a prototype Scanner instance for scanning RC source files

SCons.Scanner.RC.**no_tlb** (nodes)

Filter out .tlb files as they are binary and shouldn't be scanned

SCons.Scanner.SWIG module

SCons.Scanner.SWIG

This module implements the dependency scanner for SWIG code.

SCons.Scanner.SWIG.**SWIGScanner** ()

Module contents

SCons.Scanner

The Scanner package for the SCons software construction utility.

```
class SCons.Scanner.Base (function, name='NONE', argument=<class 'SCons.Scanner._Null'>,
keys=<class 'SCons.Scanner._Null'>, path_function=None, node_class=<class
'SCons.Node.FS.Base'>, node_factory=None, scan_check=None, recursive=None)
```

Bases: **object**

The base class for dependency scanners. This implements straightforward, single-pass scanning of a single file.

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

select (node)

```
class SCons.Scanner.Classic (name, suffixes, path_variable, regex, *args, **kw)
```

Bases: **SCons.Scanner.Current**

A Scanner subclass to contain the common logic for classic CPP-style include scanning, but which can be customized to use different regular expressions to find the includes.

Note that in order for this to work “out of the box” (without overriding the `find_include()` and `sort_key()` methods), the regular expression passed to the constructor must return the name of the include file in group 0.

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

find_include (include, source_dir, path)

find_include_names (node)

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

scan (node, path=())

select (node)

sort_key (include)

```
class SCons.Scanner.ClassicCPP (name, suffixes, path_variable, regex, *args, **kw)
```

Bases: **SCons.Scanner.Classic**

A Classic Scanner subclass which takes into account the type of bracketing used to include the file, and uses classic CPP rules for searching for the files based on the bracketing.

Note that in order for this to work, the regular expression passed to the constructor must return the leading bracket in group 0, and the contained filename in group 1.

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

find_include (include, source_dir, path)

find_include_names (node)

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

scan (node, path=())

select (node)

sort_key (include)

class SCons.Scanner.**Current** (*args, **kw)

Bases: SCons.Scanner.Base

A class for scanning files that are source files (have no builder) or are derived files and are current (which implies that they exist, either locally or in a repository).

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

select (node)

class SCons.Scanner.**FindPathDirs** (variable)

Bases: object

A class to bind a specific E{*}PATH variable name to a function that will return all of the E{*}path directories.

SCons.Scanner.**Scanner** (function, *args, **kw)

Public interface factory function for creating different types of Scanners based on the different types of “functions” that may be supplied.

TODO: Deprecate this some day. We’ve moved the functionality inside the Base class and really don’t need this factory function any more. It was, however, used by some of our Tool modules, so the call probably ended up in various people’s custom modules patterned on SCons code.

class SCons.Scanner.**Selector** (dict, *args, **kw)

Bases: SCons.Scanner.Base

A class for selecting a more specific scanner based on the scanner_key() (suffix) for a specific Node.

TODO: This functionality has been moved into the inner workings of the Base class, and this class will be deprecated at some point. (It was never exposed directly as part of the public interface, although it is used by the Scanner() factory function that was used by various Tool modules and therefore was likely a template for custom modules that may be out there.)

_recurse_all_nodes (nodes)

_recurse_no_nodes (nodes)

SCons.Script package

add_scanner (skey, scanner)

add_skey (skey)

Add a skey to the list of skeys

get_skeys (env=None)

path (env, dir=None, target=None, source=None)

select (node)

class SCons.Scanner._Null

Bases: **object**

SCons.Scanner._null

alias of **SCons.Scanner._Null**

SCons.Script package

Submodules

SCons.Script.Interactive module

SCons interactive mode

class SCons.Script.Interactive.SConsInteractiveCmd (**kw)

Bases: **cmd.Cmd**

build [TARGETS] Build the specified TARGETS and their dependencies. 'b' is a synonym. **clean** [TARGETS] Clean (remove) the specified TARGETS and their dependencies. 'c' is a synonym. **exit** Exit SCons interactive mode. **help** [COMMAND] Prints help for the specified COMMAND. 'h' and '?' are synonyms. **shell** [COMMANDLINE] Execute COMMANDLINE in a subshell. 'sh' and '!' are synonyms. **version** Prints SCons version information.

_do_one_help (arg)

_doc_to_help (obj)

_strip_initial_spaces (s)

cmdloop (intro=None)

Repeatedly issue a prompt, accept input, parse an initial prefix off the received input, and dispatch to action methods, passing them the remainder of the line as argument.

columnize (list, displaywidth=80)

Display a list of strings as a compact set of columns.

Each column is only as wide as necessary. Columns are separated by two spaces (one was not legible enough).

complete (text, state)

Return the next possible completion for 'text'.

If a command has not been entered, then complete against command list. Otherwise try to call `complete_<command>` to get list of completions.

complete_help (*args)

completedefault (*ignored)

Method called to complete an input line when no command-specific `complete_*`() method is available.

By default, it returns an empty list.

completenames (text, *ignored)

default (argv)

Called on an input line when the command prefix is not recognized.
If this method is not overridden, it prints an error message and returns.

do_EOF (argv)**do_build (argv)**

build [TARGETS] Build the specified TARGETS and their dependencies. 'b' is a synonym.

do_clean (argv)

clean [TARGETS] Clean (remove) the specified TARGETS and their dependencies. 'c' is a synonym.

do_exit (argv)

exit Exit SCons interactive mode.

do_help (argv)

help [COMMAND] Prints help for the specified COMMAND. 'h' and '?' are synonyms.

do_shell (argv)

shell [COMMANDLINE] Execute COMMANDLINE in a subshell. 'sh' and '!' are synonyms.

do_version (argv)

version Prints SCons version information.

doc_header = *'Documented commands (type help <topic>):'*

doc_leader = ""

emptyline ()

Called when an empty line is entered in response to the prompt.
If this method is not overridden, it repeats the last nonempty command entered.

get_names ()

identchars = *'abcdefghijklmnopqrstuvwxyABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789_'*

intro = *None*

lastcmd = ""

misc_header = *'Miscellaneous help topics:'*

nohelp = *'''' No help on %s'*

onecmd (line)

Interpret the argument as though it had been typed in response to the prompt.
This may be overridden, but should not normally need to be; see the `precmd()` and `postcmd()` methods for useful execution hooks. The return value is a flag indicating whether interpretation of commands by the interpreter should stop.

parseline (line)

Parse the line into a command name and a string containing the arguments. Returns a tuple containing (command, args, line). 'command' and 'args' may be None if the line couldn't be parsed.

postcmd (stop, line)

Hook method executed just after a command dispatch is finished.

postloop ()

Hook method executed once when the `cmdloop()` method is about to return.

precmd (line)

Hook method executed just before the command line is interpreted, but after the input prompt is generated and issued.

preloop ()

Hook method executed once when the cmdloop() method is called.

print_topics (header, cmds, cmdlen, maxcol)

prompt = '(Cmd) '

ruler = '='

synonyms = {'b': 'build', 'c': 'clean', 'h': 'help', 'scons': 'build', 'sh': 'shell'}

undoc_header = 'Undocumented commands:'

use_rawinput = 1

SCons.Script.Interactive.**interact** (fs, parser, options, targets, target_top)

SCons.Script.Main module

SCons.Script

This file implements the main() function used by the scons script.

Architecturally, this *is* the scons script, and will likely only be called from the external “scons” wrapper. Consequently, anything here should not be, or be considered, part of the build engine. If it’s something that we expect other software to want to use, it should go in some other module. If it’s specific to the “scons” script invocation, it goes here.

SCons.Script.Main.**AddOption** (*args, **kw)

class SCons.Script.Main.**BuildTask** (tm, targets, top, node)

Bases: **SCons.Taskmaster.OutOfDateTask**

An SCons build task.

_abc_impl = <_abc_data object>

_exception_raise ()

Raises a pending exception that was recorded while getting a Task ready for execution.

_no_exception_to_raise ()

display (message)

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

do_failed (status=2)

exc_clear ()

Clears any recorded exception.

This also changes the “exception_raise” attribute to point to the appropriate do-nothing method.

exc_info ()

Returns info about a recorded exception.

exception_set (exception=None)

Records an exception to be raised at the appropriate time.

This also changes the “exception_raise” attribute to point to the method that will, in fact

execute ()

Called to execute the task.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in prepare(), executed() or failed().

executed ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node’s callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node’s state before deciding whether it was “built”, in which case we call the appropriate Node method. In any event, we always call “visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn’t want to call the Node’s callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Make a task ready for execution

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what’s necessary.

needs_execute ()

Returns True (indicating this Task should be executed) if this Task's target state indicates it needs executing, which has already been determined by an earlier up-to-date check.

postprocess ()

Post-processes a task after it's been executed.

This examines all the targets just built (or not, we don't care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

trace_message (method, node, description='node')

class SCons.Script.Main.CleanTask (tm, targets, top, node)

Bases: **SCons.Taskmaster.AlwaysTask**

An SCons clean task.

_abc_impl = <_abc_data object>

_clean_targets (remove=True)

_exception_raise ()

Raises a pending exception that was recorded while getting a Task ready for execution.

_get_files_to_clean ()

_no_exception_to_raise ()

display (message)

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

exc_clear ()

Clears any recorded exception.

This also changes the "exception_raise" attribute to point to the appropriate do-nothing method.

exc_info ()

Returns info about a recorded exception.

exception_set (exception=None)

Records an exception to be raised at the appropriate time.

This also changes the "exception_raise" attribute to point to the method that will, in fact

execute ()

executed ()

Called when the task has been successfully executed and the Taskmaster instance doesn't want to call the Node's callback methods.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call

“visited()”, which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn't want to call the Node's callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using Configure().

fs_delete (path, pathstr, remove=True)

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

needs_execute ()

Always returns True (indicating this Task should always be executed).

Subclasses that need this behavior (as opposed to the default of only executing Nodes that are out of date w.r.t. their dependencies) can use this as follows:

```
class MyTaskSubclass(SCons.Taskmaster.Task):
```

```
    needs_execute = SCons.Taskmaster.AlwaysTask.needs_execute
```

postprocess ()

Post-processes a task after it's been executed.

This examines all the targets just built (or not, we don't care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

```

remove ()

show ()

trace_message (method, node, description='node')

```

```
class SCons.Script.Main.CountStats
```

```
  Bases: SCons.Script.Main.Stats
```

```

do_append (label)

do_nothing (*args, **kw)

do_print ()

enable (outfp)

```

```
class SCons.Script.Main.FakeOptionParser
```

```
  Bases: object
```

A do-nothing option parser, used for the initial OptionsParser variable.

During normal SCons operation, the OptionsParser is created right away by the main() function. Certain tests scripts however, can introspect on different Tool modules, the initialization of which can try to add a new, local option to an otherwise uninitialized OptionsParser object. This allows that introspection to happen without blowing up.

```
class FakeOptionValues
```

```
  Bases: object
```

```

add_local_option (*args, **kw)

values = <SCons.Script.Main.FakeOptionParser.FakeOptionValues object>

```

```
SCons.Script.Main.GetBuildFailures ()
```

```
SCons.Script.Main.GetOption (name)
```

```
class SCons.Script.Main.MemStats
```

```
  Bases: SCons.Script.Main.Stats
```

```

do_append (label)

do_nothing (*args, **kw)

do_print ()

enable (outfp)

```

```
SCons.Script.Main.PrintHelp (file=None)
```

```
SCons.Script.Main.Progress (*args, **kw)
```

```
class SCons.Script.Main.Progressor (obj, interval=1, file=None, overwrite=False)
```

```
  Bases: object
```

```

count = 0

erase_previous ()

prev = ""

replace_string (node)

spinner (node)

```

string (node)

target_string = '\$TARGET'

write (s)

class SCons.Script.Main.**QuestionTask** (tm, targets, top, node)

Bases: **SCons.Taskmaster.AlwaysTask**

An SCons task for the -q (question) option.

_abc_impl = <_abc_data object>

_exception_raise ()

Raises a pending exception that was recorded while getting a Task ready for execution.

_no_exception_to_raise ()

display (message)

Hook to allow the calling interface to display a message.

This hook gets called as part of preparing a task for execution (that is, a Node to be built). As part of figuring out what Node should be built next, the actual target list may be altered, along with a message describing the alteration. The calling interface can subclass Task and provide a concrete implementation of this method to see those messages.

exc_clear ()

Clears any recorded exception.

This also changes the "exception_raise" attribute to point to the appropriate do-nothing method.

exc_info ()

Returns info about a recorded exception.

exception_set (exception=None)

Records an exception to be raised at the appropriate time.

This also changes the "exception_raise" attribute to point to the method that will, in fact

execute ()

Called to execute the task.

This method is called from multiple threads in a parallel build, so only do thread safe stuff here. Do thread unsafe stuff in prepare(), executed() or failed().

executed ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call "visited()", which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_with_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance wants to call the Node's callback methods.

This may have been a do-nothing operation (to preserve build order), so we must check the node's state before deciding whether it was "built", in which case we call the appropriate Node method. In any event, we always call "visited()", which will handle any post-visit actions that must take place regardless of whether or not the target was an actual built target or a source Node.

executed_without_callbacks ()

Called when the task has been successfully executed and the Taskmaster instance doesn't want to call the Node's callback methods.

fail_continue ()

Explicit continue-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using `Configure()`.

fail_stop ()

Explicit stop-the-build failure.

This sets failure status on the target nodes and all of their dependent parent nodes.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using `Configure()`.

failed ()

Default action when a task fails: stop the build.

Note: Although this function is normally invoked on nodes in the executing state, it might also be invoked on up-to-date nodes when using `Configure()`.

get_target ()

Fetch the target being built or updated by this task.

make_ready ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

make_ready_all ()

Marks all targets in a task ready for execution.

This is used when the interface needs every target Node to be visited—the canonical example being the “scons -c” option.

make_ready_current ()

Marks all targets in a task ready for execution if any target is not current.

This is the default behavior for building only what's necessary.

needs_execute ()

Always returns True (indicating this Task should always be executed).

Subclasses that need this behavior (as opposed to the default of only executing Nodes that are out of date w.r.t. their dependencies) can use this as follows:

```
class MyTaskSubclass(SCons.Taskmaster.Task):
```

```
    needs_execute = SCons.Taskmaster.AlwaysTask.needs_execute
```

postprocess ()

Post-processes a task after it's been executed.

This examines all the targets just built (or not, we don't care if the build was successful, or even if there was no build because everything was up-to-date) to see if they have any waiting parent Nodes, or Nodes waiting on a common side effect, that can be put back on the candidates list.

prepare ()

Called just before the task is executed.

This is mainly intended to give the target Nodes a chance to unlink underlying files and make all necessary directories before the Action is actually called to build the targets.

```
trace_message (method, node, description='node')
```

```
exception SCons.Script.Main.SConsPrintHelpException
```

```
Bases: Exception
```

```
args
```

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

SCons.Script package

`SCons.Script.Main.SetOption` (name, value)

`class SCons.Script.Main.Stats`

Bases: `object`

`do_nothing` (*args, **kw)

`enable` (outfp)

`class SCons.Script.Main.TreePrinter` (derived=False, prune=False, status=False, sLineDraw=False)

Bases: `object`

`display` (t)

`get_all_children` (node)

`get_derived_children` (node)

`SCons.Script.Main._SConstruct_exists` (dirname='', repositories=[], filelist=None)

This function checks that an SConstruct file exists in a directory. If so, it returns the path of the file. By default, it checks the current directory.

`SCons.Script.Main._build_targets` (fs, options, targets, target_top)

`SCons.Script.Main._create_path` (plist)

`SCons.Script.Main._exec_main` (parser, values)

`SCons.Script.Main._load_all_site_scons_dirs` (topdir, verbose=None)

Load all of the predefined site_scons dir. Order is significant; we load them in order from most generic (machine-wide) to most specific (topdir). The verbose argument is only for testing.

`SCons.Script.Main._load_site_scons_dir` (topdir, site_dir_name=None)

Load the site directory under topdir.

If a site dir name is supplied use it, else use default "site_scons" Prepend site dir to sys.path. If a "site_tools" subdir exists, prepend to toolpath. Import "site_init.py" from site dir if it exists.

`SCons.Script.Main._main` (parser)

`SCons.Script.Main._scons_internal_error` ()

Handle all errors but user errors. Print out a message telling the user what to do in this case and print a normal trace.

`SCons.Script.Main._scons_internal_warning` (e)

Slightly different from `_scons_user_warning` in that we use the *current call stack* rather than `sys.exc_info()` to get our stack trace. This is used by the warnings framework to print warnings.

`SCons.Script.Main._scons_syntax_error` (e)

Handle syntax errors. Print out a message and show where the error occurred.

`SCons.Script.Main._scons_user_error` (e)

Handle user errors. Print out a message and a description of the error, along with the line number and routine where it occurred. The file and line number will be the deepest stack frame that is not part of SCons itself.

`SCons.Script.Main._scons_user_warning` (e)

Handle user warnings. Print out a message and a description of the warning, along with the line number and routine where it occurred. The file and line number will be the deepest stack frame that is not part of SCons itself.

`SCons.Script.Main._set_debug_values` (options)

`SCons.Script.Main.fetch_win32_parallel_msg` ()

`SCons.Script.Main.find_deepest_user_frame` (tb)

Find the deepest stack frame that is not part of SCons.

Input is a "pre-processed" stack trace in the form returned by `traceback.extract_tb()` or `traceback.extract_stack()`

`SCons.Script.Main.main` ()

```

SCons.Script.Main.path_string (label, module)
SCons.Script.Main.python_version_deprecated (version=sys.version_info(major=3, minor=7,
micro=8, releaselevel='final', serial=0))
SCons.Script.Main.python_version_string ()
SCons.Script.Main.python_version_unsupported (version=sys.version_info(major=3, minor=7,
micro=8, releaselevel='final', serial=0))
SCons.Script.Main.revert_io ()
SCons.Script.Main.test_load_all_site_scons_dirs (d)
SCons.Script.Main.version_string (label, module)

```

SCons.Script.SConsOptions module

SCons.Script.SConsOptions.**Parser** (version)
Returns an options parser object initialized with the standard SCons options.

```

class SCons.Script.SConsOptions.SConsIndentedHelpFormatter (indent_increment=2,
max_help_position=24, width=None, short_first=1)

```

Bases: **optparse.IndentedHelpFormatter**

NO_DEFAULT_VALUE = 'none'

_format_text (text)

Format a paragraph of free-form text for inclusion in the help output at the current indentation level.

dedent ()

expand_default (option)

format_description (description)

format_epilog (epilog)

format_heading (heading)

This translates any heading of "options" or "Options" into "SCons Options." Unfortunately, we have to do this here, because those titles are hard-coded in the optparse calls.

format_option (option)

A copy of the normal optparse.IndentedHelpFormatter.format_option() method. This has been snarfed so we can modify text wrapping to out liking:

- **add our own regular expression that doesn't break on hyphens**
(so things like --no-print-directory don't get broken);
- **wrap the list of options themselves when it's too long**
(the wrapper.fill(opts) call below);
- set the subsequent_indent when wrapping the help_text.

format_option_strings (option)

Return a comma-separated list of option strings & metavariables.

format_usage (usage)

indent ()

set_long_opt_delimiter (delim)

set_parser (parser)

```
set_short_opt_delimiter (delim)
```

```
store_option_strings (parser)
```

```
class SCons.Script.SConsOptions.SConsOption (*opts, **attrs)
```

```
Bases: optparse.Option
```

```
ACTIONS = ('store', 'store_const', 'store_true', 'store_false', 'append', 'append_const', 'count', 'callback', 'help', 'version')
```

```
ALWAYS_TYPED_ACTIONS = ('store', 'append')
```

```
ATTRS = ['action', 'type', 'dest', 'default', 'nargs', 'const', 'choices', 'callback', 'callback_args', 'callback_kwargs', 'help', 'metavar']
```

```
CHECK_METHODS = [<function Option._check_action>, <function Option._check_type>, <function Option._check_choice>, <function Option._check_dest>, <function Option._check_const>, <function Option._check_nargs>, <function Option._check_callback>, <function SConsOption._check_nargs_optional>]
```

```
CONST_ACTIONS = ('store_const', 'append_const', 'store', 'append', 'callback')
```

```
STORE_ACTIONS = ('store', 'store_const', 'store_true', 'store_false', 'append', 'append_const', 'count')
```

```
TYPED_ACTIONS = ('store', 'append', 'callback')
```

```
TYPES = ('string', 'int', 'long', 'float', 'complex', 'choice')
```

```
TYPE_CHECKER = {'choice': <function check_choice>, 'complex': <function check_builtin>, 'float': <function check_builtin>, 'int': <function check_builtin>, 'long': <function check_builtin>}
```

```
_check_action ()
```

```
_check_callback ()
```

```
_check_choice ()
```

```
_check_const ()
```

```
_check_dest ()
```

```
_check_nargs ()
```

```
_check_nargs_optional ()
```

```
_check_opt_strings (opts)
```

```
_check_type ()
```

```
_set_attrs (attrs)
```

```
_set_opt_strings (opts)
```

```
check_value (opt, value)
```

```
convert_value (opt, value)
```

```
get_opt_string ()
```

```
process (opt, value, values, parser)
```

```
take_action (action, dest, opt, value, values, parser)
```

takes_value ()

class SCons.Script.SConsOptions.**SConsOptionGroup** (parser, title, description=None)

Bases: **optparse.OptionGroup**

A subclass for SCons-specific option groups.

The only difference between this and the base class is that we print the group's help text flush left, underneath their own title but lined up with the normal "SCons Options".

_check_conflict (option)

_create_option_list ()

_create_option_mappings ()

_share_option_mappings (parser)

add_option (Option)

add_option(opt_str, ..., kwarg=val, ...)

add_options (option_list)

destroy ()

see OptionParser.destroy().

format_description (formatter)

format_help (formatter)

Format an option group's help text, outdenting the title so it's flush with the "SCons Options" title we print at the top.

format_option_help (formatter)

get_description ()

get_option (opt_str)

has_option (opt_str)

remove_option (opt_str)

set_conflict_handler (handler)

set_description (description)

set_title (title)

class SCons.Script.SConsOptions.**SConsOptionParser** (usage=None, option_list=None, option_class=<class 'optparse.Option'>, version=None, conflict_handler='error', description=None, formatter=None, add_help_option=True, prog=None, epilog=None)

Bases: **optparse.OptionParser**

_add_help_option ()

_add_version_option ()

_check_conflict (option)

_create_option_list ()

_create_option_mappings ()

`_get_all_options ()`

`_get_args (args)`

`_init_parsing_state ()`

`_match_long_opt (opt : string) → string`

Determine which long option string 'opt' matches, ie. which one it is an unambiguous abbreviation for. Raises `BadOptionError` if 'opt' doesn't unambiguously match any long option string.

`_populate_option_list (option_list, add_help=True)`

`_process_args (largs, rargs, values)`

`_process_args(largs : [string],`

`rargs : [string], values : Values)`

Process command-line arguments and populate 'values', consuming options and arguments from 'rargs'. If 'allow_interspersed_args' is false, stop at the first non-option argument. If true, accumulate any interspersed non-option arguments in 'largs'.

`_process_long_opt (rargs, values)`

SCons-specific processing of long options.

This is copied directly from the normal `optparse._process_long_opt()` method, except that, if configured to do so, we catch the exception thrown when an unknown option is encountered and just stick it back on the "leftover" arguments for later (re-)processing.

`_process_short_opts (rargs, values)`

`_share_option_mappings (parser)`

`add_local_option (*args, **kw)`

Adds a local option to the parser.

This is initiated by a `SetOption()` call to add a user-defined command-line option. We add the option to a separate option group for the local options, creating the group if necessary.

`add_option (Option)`

`add_option(opt_str, ..., kwarg=val, ...)`

`add_option_group (*args, **kwargs)`

`add_options (option_list)`

`check_values (values : Values, args : [string])`

`-> (values : Values, args : [string])`

Check that the supplied option values and leftover arguments are valid. Returns the option values and leftover arguments (possibly adjusted, possibly completely new – whatever you like). Default implementation just returns the passed-in values; subclasses may override as desired.

`destroy ()`

Declare that you are done with this `OptionParser`. This cleans up reference cycles so the `OptionParser` (and all objects referenced by it) can be garbage-collected promptly. After calling `destroy()`, the `OptionParser` is unusable.

`disable_interspersed_args ()`

Set parsing to stop on the first non-option. Use this if you have a command processor which runs another command that has options of its own and you want to make sure these options don't get confused.

`enable_interspersed_args ()`

Set parsing to not stop on the first non-option, allowing interspersing switches with command arguments. This is the default behavior. See also `disable_interspersed_args()` and the class documentation description of the attribute `allow_interspersed_args`.

error (msg : string)

Print a usage message incorporating 'msg' to stderr and exit. If you override this in a subclass, it should not return – it should either exit or raise an exception.

exit (status=0, msg=None)

expand_prog_name (s)

format_description (formatter)

format_epilog (formatter)

format_help (formatter=None)

format_option_help (formatter=None)

get_default_values ()

get_description ()

get_option (opt_str)

get_option_group (opt_str)

get_prog_name ()

get_usage ()

get_version ()

has_option (opt_str)

parse_args (args=None, values=None)

parse_args(args : [string] = sys.argv[1:],

values : Values = None)

-> (values : Values, args : [string])

Parse the command-line options found in 'args' (default: sys.argv[1:]). Any errors result in a call to 'error()', which by default prints the usage message to stderr and calls sys.exit() with an error message. On success returns a pair (values, args) where 'values' is a Values instance (with all your option values) and 'args' is the list of arguments left over after parsing options.

preserve_unknown_options = False

print_help (file : file = stdout)

Print an extended help message, listing all options and any help text provided with them, to 'file' (default stdout).

print_usage (file : file = stdout)

Print the usage message for the current program (self.usage) to 'file' (default stdout). Any occurrence of the string "%prog" in self.usage is replaced with the name of the current program (basename of sys.argv[0]). Does nothing if self.usage is empty or not defined.

print_version (file : file = stdout)

Print the version message for this program (self.version) to 'file' (default stdout). As with print_usage(), any occurrence of "%prog" in self.version is replaced by the current program's name. Does nothing if self.version is empty or undefined.

remove_option (opt_str)

reparse_local_options ()

Re-parse the leftover command-line options.

Parse options stored in *self.largs*, so that any value overridden on the command line is immediately available if the user turns around and does a `GetOption()` right away.

We mimic the processing of the single args in the original OptionParser `process_args()`, but here we allow exact matches for long-opts only (no partial argument names!). Otherwise there could be problems in `add_local_option()` below. When called from there, we try to reparse the command-line arguments that

1. haven't been processed so far (*self.largs*), but

2. are possibly not added to the list of options yet.

So, when we only have a value for “-myargument” so far, a command-line argument of “-myarg=test” would set it, per the behaviour of `match_long_opt()`, which allows for partial matches of the option name, as long as the common prefix appears to be unique. This would lead to further confusion, because we might want to add another option “-myarg” later on (see issue #2929).

```
set_conflict_handler(handler)
```

```
set_default(dest, value)
```

```
set_defaults(**kwargs)
```

```
set_description(description)
```

```
set_process_default_values(process)
```

```
set_usage(usage)
```

```
standard_option_list = []
```

```
class SCons.Script.SConsOptions.SConsValues(defaults)
```

Bases: `optparse.Values`

Holder class for uniform access to SCons options, regardless of whether or not they can be set on the command line or in the SConscript files (using the `SetOption()` function).

A SCons option value can originate three different ways:

1. set on the command line;
2. set in an SConscript file;

3. the default setting (from the the `op.add_option()` calls in the `Parser()` function, below).

The command line always overrides a value set in a SConscript file, which in turn always overrides default settings. Because we want to support user-specified options in the SConscript file itself, though, we may not know about all of the options when the command line is first parsed, so we can't make all the necessary precedence decisions at the time the option is configured.

The solution implemented in this class is to keep these different sets of settings separate (command line, SConscript file, and default) and to override the `__getattr__()` method to check them in turn. This should allow the rest of the code to just fetch values as attributes of an instance of this class, without having to worry about where they came from.

Note that not all command line options are settable from SConscript files, and the ones that are must be explicitly added to the “settable” list in this class, and optionally validated and coerced in the `set_option()` method.

```
_update(dict, mode)
```

```
_update_careful(dict)
```

Update the option values from an arbitrary dictionary, but only use keys from dict that already have a corresponding attribute in self. Any keys in dict without a corresponding attribute are silently ignored.

```
_update_loose(dict)
```

Update the option values from an arbitrary dictionary, using all keys from the dictionary regardless of whether they have a corresponding attribute in self or not.

```
ensure_value(attr, value)
```

```
read_file(filename, mode='careful')
```

read_module (modname, mode='careful')

set_option (name, value)

Sets an option from an SConscript file.

settable = ['clean', 'diskcheck', 'duplicate', 'help', 'implicit_cache', 'max_drift', 'md5_chunksize', 'no_exec', 'num_jobs', 'random', 'stack_size', 'warn', 'silent', 'no_progress']

SCons.Script.SConsOptions.**diskcheck_convert** (value)

SCons.Script.SConscript module

SCons.Script.SConscript

This module defines the Python API provided to SConscript and SConstruct files.

SCons.Script.SConscript.**BuildDefaultGlobals** ()

Create a dictionary containing all the default globals for SConstruct and SConscript files.

SCons.Script.SConscript.**Configure** (*args, **kw)

class SCons.Script.SConscript.**DefaultEnvironmentCall** (method_name, subst=0)

Bases: **object**

A class that implements “global function” calls of Environment methods by fetching the specified method from the DefaultEnvironment’s class. Note that this uses an intermediate proxy class instead of calling the DefaultEnvironment method directly so that the proxy can override the subst() method and thereby prevent expansion of construction variables (since from the user’s point of view this was called as a global function, with no associated construction environment).

class SCons.Script.SConscript.**Frame** (fs, exports, sconsript)

Bases: **object**

A frame on the SConstruct/SConscript call stack

SCons.Script.SConscript.**Return** (*vars, **kw)

class SCons.Script.SConscript.**SConsEnvironment** (platform=None, tools=None, toolpath=None, variables=None, parse_flags=None, **kw)

Bases: **SCons.Environment.Base**

An Environment subclass that contains all of the methods that are particular to the wrapper SCons interface and which aren’t (or shouldn’t be) part of the build engine itself.

Note that not all of the methods of this class have corresponding global functions, there are some private methods.

Action (*args, **kw)

AddMethod (function, name=None)

Adds the specified function as a method of this construction environment with the specified name. If the name is omitted, the default name is the name of the function itself.

AddPostAction (files, action)

AddPreAction (files, action)

Alias (target, source=[], action=None, **kw)

AlwaysBuild (*targets)

Append (**kw)

Append values to existing construction variables in an Environment.

AppendENVPPath (name, newpath, envname='ENV', sep=':', delete_existing=0)

Append path elements to the path ‘name’ in the ‘ENV’ dictionary for this environment. Will only add any particular path once, and will normpath and normcase all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If `delete_existing` is 0, a `newpath` which is already in the path will not be moved to the end (it will be left where it is).

AppendUnique (`delete_existing=0, **kw`)

Append values to existing construction variables in an Environment, if they're not already there. If `delete_existing` is 1, removes existing values first, so values move to end.

Builder (`**kw`)

CacheDir (`path`)

Clean (`targets, files`)

Clone (`tools=[], toolpath=None, parse_flags=None, **kw`)

Return a copy of a construction Environment.

The copy is like a Python "deep copy"—that is, independent copies are made recursively of each objects—except that a reference is copied when an object is not deep-copyable (like a function). There are no references to any mutable objects in the original Environment.

Command (`target, source, action, **kw`)

Builds the supplied target files from the supplied source files using the supplied action. Action may be any type that the Builder constructor will accept for an action.

Configure (`*args, **kw`)

Decider (`function`)

Default (`*targets`)

Depends (`target, dependency`)

Explicitly specify that 'target's depend on 'dependency'.

Detect (`progs`)

Return the first available program from one or more possibilities.

Parameters: **progs** (*str or list*) – one or more command names to check for

Dictionary (`*args`)

Return construction variables from an environment.

Parameters: ***args** (*optional*) – variable names to look up

Returns: If *args* omitted, the dictionary of all construction variables. If one arg, the corresponding value is returned. If more than one arg, a list of values is returned.

Raises: **KeyError** – if any of *args* is not in the construction environment.

Dir (`name, *args, **kw`)

Dump (`key=None, format='pretty'`)

Return construction variables serialized to a string.

Parameters:

- **key** (*optional*) – if None, format the whole dict of variables. Else format the value of *key* (Default value = None)
- **format** (*str, optional*) – specify the format to serialize to. "pretty" generates a pretty-printed string, "json" a JSON-formatted string. (Default value = "pretty")

EnsurePythonVersion (`major, minor`)

Exit abnormally if the Python version is not late enough.

EnsureSConsVersion (`major, minor, revision=0`)

Exit abnormally if the SCons version is not late enough.

Entry (name, *args, **kw)

Environment (**kw)

Execute (action, *args, **kw)
Directly execute an action through an Environment

Exit (value=0)

Export (*vars, **kw)

File (name, *args, **kw)

FindFile (file, dirs)

FindInstalledFiles ()
returns the list of all targets of the Install and InstallAs Builder.

FindIndexes (paths, prefix, suffix)
Search a list of paths for something that matches the prefix and suffix.

Parameters:

- **paths** – the list of paths or nodes.
- **prefix** – construction variable for the prefix.
- **suffix** – construction variable for the suffix.

Returns: the matched path or None

FindSourceFiles (node='.')
returns a list of all source files.

Flatten (sequence)

GetBuildPath (files)

GetLaunchDir ()

GetOption (name)

Glob (pattern, ondisk=True, source=False, strings=False, exclude=None)

Help (text, append=False)

Ignore (target, dependency)
Ignore a dependency.

Import (*vars)

Literal (string)

Local (*targets)

MergeFlags (args, unique=1, dict=None)
Merge the dict in args into the construction variables of this env, or the passed-in dict. If args is not a dict, it is converted into a dict using ParseFlags. If unique is not set, the flags are appended rather than merged.

NoCache (*targets)
Tags a target so that it will not be cached

NoClean (*targets)
Tags a target so that it will not be cleaned by -c

Override (*overrides*)

Produce a modified environment whose variables are overridden by the overrides dictionaries. “overrides” is a dictionary that will override the variables of this environment.

This function is much more efficient than Clone() or creating a new Environment because it doesn't copy the construction environment dictionary, it just wraps the underlying construction environment, and doesn't even create a wrapper object if there are no overrides.

ParseConfig (*command*, *function=None*, *unique=1*)

Use the specified function to parse the output of the command in order to modify the current environment. The ‘command’ can be a string or a list of strings representing a command and its arguments. ‘Function’ is an optional argument that takes the environment, the output of the command, and the unique flag. If no function is specified, MergeFlags, which treats the output as the result of a typical ‘X-config’ command (i.e. gtk-config), will merge the output into the appropriate variables.

ParseDepends (*filename*, *must_exist=None*, *only_one=0*)

Parse a mkdep-style file for explicit dependencies. This is completely abusable, and should be unnecessary in the “normal” case of proper SCons configuration, but it may help make the transition from a Make hierarchy easier for some people to swallow. It can also be genuinely useful when using a tool that can write a .d file, but for which writing a scanner would be too complicated.

ParseFlags (**flags*)

Parse the set of flags and return a dict with the flags placed in the appropriate entry. The flags are treated as a typical set of command-line flags for a GNU-like toolchain and used to populate the entries in the dict immediately below. If one of the flag strings begins with a bang (exclamation mark), it is assumed to be a command and the rest of the string is executed; the result of that evaluation is then added to the dict.

Platform (*platform*)**Precious** (**targets*)**Prepend** (***kw*)

Prepend values to existing construction variables in an Environment.

PrependENVPath (*name*, *newpath*, *envname='ENV'*, *sep=':'*, *delete_existing=1*)

Prepend path elements to the path ‘name’ in the ‘ENV’ dictionary for this environment. Will only add any particular path once, and will normpath and normcase all paths to help assure this. This can also handle the case where the env variable is a list instead of a string.

If delete_existing is 0, a newpath which is already in the path will not be moved to the front (it will be left where it is).

PrependUnique (*delete_existing=0*, ***kw*)

Prepend values to existing construction variables in an Environment, if they're not already there. If delete_existing is 1, removes existing values first, so values move to front.

Pseudo (**targets*)**PyPackageDir** (*modulename*)**RemoveMethod** (*function*)

Removes the specified function's MethodWrapper from the added_methods list, so we don't re-bind it when making a clone.

Replace (***kw*)

Replace existing construction variables in an Environment with new construction variables and/or values.

ReplaceIxes (*path*, *old_prefix*, *old_suffix*, *new_prefix*, *new_suffix*)

Replace old_prefix with new_prefix and old_suffix with new_suffix.

env - Environment used to interpolate variables. path - the path that will be modified. old_prefix - construction variable for the old prefix. old_suffix - construction variable for the old suffix. new_prefix - construction variable for the new prefix. new_suffix - construction variable for the new suffix.

Repository (*dirs, **kw)

Requires (target, prerequisite)

Specify that 'prerequisite' must be built before 'target', (but 'target' does not actually depend on 'prerequisite' and need not be rebuilt if it changes).

SConscript (*ls, **kw)

Execute SCons configuration files.

Parameters: *ls (*str or list*) – configuration file(s) to execute.

Keyword

Arguments:

- **dirs** (*list*) – execute SConscript in each listed directory.
- **name** (*str*) – execute script 'name' (used only with 'dirs').
- **exports** (*list or dict*) – locally export variables the called script(s) can import.
- **variant_dir** (*str*) – mirror sources needed for the build in a variant directory to allow building in it.
- **duplicate** (*bool*) – physically duplicate sources instead of just adjusting paths of derived files (used only with 'variant_dir') (default is True).
- **must_exist** (*bool*) – fail if a requested script is missing (default is False, default is deprecated).

Returns: list of variables returned by the called script

Raises: **UserError** – a script is not found and such exceptions are enabled.

SConscriptChdir (flag)

SConsignFile (name=' .sconsign', dbm_module=None)

Scanner (*args, **kw)

SetDefault (**kw)

SetOption (name, value)

SideEffect (side_effect, target)

Tell scons that side_effects are built as side effects of building targets.

split (arg)

This function converts a string or list into a list of strings or Nodes. This makes things easier for users by allowing files to be specified as a white-space separated list to be split.

The input rules are:

- A single string containing names separated by spaces. These will be split apart at the spaces.
- A single Node instance
- A list containing either strings or Node instances. Any strings in the list are not split at spaces.

In all cases, the function returns a list of Nodes and strings.

Tool (tool, toolpath=None, **kw)

Value (value, built_value=None, name=None)

VariantDir (variant_dir, src_dir, duplicate=1)

WhereIs (prog, path=None, pathext=None, reject=[])

Find prog in the path.

_canonicalize (path)

`_changed_build` (dependency, target, prev_ni, repo_node=None)

`_changed_content` (dependency, target, prev_ni, repo_node=None)

`_changed_source` (dependency, target, prev_ni, repo_node=None)

`_changed_timestamp_match` (dependency, target, prev_ni, repo_node=None)

`_changed_timestamp_newer` (dependency, target, prev_ni, repo_node=None)

`_changed_timestamp_then_content` (dependency, target, prev_ni, repo_node=None)

`_copy2_from_cache` (src, dst)

`_copy_from_cache` (src, dst)

`_exceeds_version` (major, minor, v_major, v_minor)
Return 1 if 'major' and 'minor' are greater than the version in 'v_major' and 'v_minor', and 0 otherwise.

`_find_toolpath_dir` (tp)

`_get_SConscript_filenames` (ls, kw)
Convert the parameters passed to SConscript() calls into a list of files and export variables. If the parameters are invalid, throws SCons.Errors.UserError. Returns a tuple (l, e) where l is a list of SConscript filenames and e is a list of exports.

`_get_major_minor_revision` (version_string)
Split a version string into major, minor and (optionally) revision parts.
This is complicated by the fact that a version string can be something like 3.2b1.

`_gsm` ()

`_init_special` ()
Initial the dispatch tables for special handling of special construction variables.

`_update` (other)
Private method to update an environment's consvar dict directly.
Bypasses the normal checks that occur when users try to set items.

`_update_onlynew` (other)
Private method to add new items to an environment's consvar dict.
Only adds items from *other* whose keys do not already appear in the existing dict; values from *other* are not used for replacement. Bypasses the normal checks that occur when users try to set items.

`arg2nodes` (args, node_factory=<class 'SCons.Environment._Null'>, lookup_list=<class 'SCons.Environment._Null'>, **kw)

`backtick` (command)

`get` (key, default=None)
Emulates the get() method of dictionaries.

`get_CacheDir` ()

`get_builder` (name)
Fetch the builder with the specified name from the environment.

`get_factory` (factory, default='File')
Return a factory function for creating Nodes for this construction environment.

`get_scanner` (skey)

Find the appropriate scanner given a key (usually a file suffix).

get_src_sig_type ()

get_tgt_sig_type ()

gvars ()

has_key (key)

Emulates the has_key() method of dictionaries.

items ()

Emulates the items() method of dictionaries.

keys ()

Emulates the keys() method of dictionaries.

lvars ()

scanner_map_delete (kw=None)

Delete the cached scanner map (if we need to).

subst (string, raw=0, target=None, source=None, conv=None, executor=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

subst_kw (kw, raw=0, target=None, source=None)

subst_list (string, raw=0, target=None, source=None, conv=None, executor=None)

Calls through to SCons.Subst.scons_subst_list(). See the documentation for that function.

subst_path (path, target=None, source=None)

Substitute a path list, turning EntryProxies into Nodes and leaving Nodes (and other objects) as-is.

subst_target_source (string, raw=0, target=None, source=None, conv=None, executor=None)

Recursively interpolates construction variables from the Environment into the specified string, returning the expanded result. Construction variables are specified by a \$ prefix in the string and begin with an initial underscore or alphabetic character followed by any number of underscores or alphanumeric characters. The construction variable names may be surrounded by curly braces to separate the name from trailing characters.

values ()

Emulates the values() method of dictionaries.

exception SCons.Script.SConscript.SConscriptReturn

Bases: **Exception**

args

with_traceback ()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

SCons.Script.SConscript.SConscript_exception (file=<_io.TextIOWrapper name='<stderr>' mode='w' encoding='utf-8'>)

Print an exception stack trace just for the SConscript file(s). This will show users who have Python errors where the problem is, without cluttering the output with all of the internal calls leading up to where we exec the SConscript.

SCons.Script.SConscript._SConscript (fs, *files, **kw)

SCons.Script.SConscript.annotate (node)

Annotate a node with the stack frame describing the SConscript file and line number that created it.

`SCons.Script.SConscript.compute_exports (exports)`

Compute a dictionary of exports given one of the parameters to the `Export()` function or the `exports` argument to `SConscript()`.

`SCons.Script.SConscript.get_DefaultEnvironmentProxy ()`

`SCons.Script.SConscript.get_calling_namespaces ()`

Return the locals and globals for the function that called into this module in the current call stack.

`SCons.Script.SConscript.handle_missing_SConscript (f, must_exist=None)`

Take appropriate action on missing file in `SConscript()` call.

Print a warning or raise an exception on missing file. On first warning, print a deprecation message.

Parameters:

- `f (str)` – path of missing configuration file
- `must_exist (bool)` – raise exception if file does not exist

Raises: `UserError` if `'must_exist'` is `True` or if `global` – `SCons.Script._no_missing_sconscript` is `True`.

Module contents

`SCons.Script`

This file implements the `main()` function used by the `scons` script.

Architecturally, this *is* the `scons` script, and will likely only be called from the external “`scons`” wrapper. Consequently, anything here should not be, or be considered, part of the build engine. If it’s something that we expect other software to want to use, it should go in some other module. If it’s specific to the “`scons`” script invocation, it goes here.

`SCons.Script.HelpFunction (text, append=False)`

`class SCons.Script.TargetList (initlist=None)`

Bases: `collections.UserList`

`_UserList__cast (other)`

`_abc_impl = <_abc_data object>`

`_add_Default (list)`

`_clear ()`

`_do_nothing (*args, **kw)`

`append (item)`

`S.append(value)` – append value to the end of the sequence

`clear ()` → `None` -- remove all items from `S`

`copy ()`

`count (value)` → `integer` -- return number of occurrences of value

`extend (other)`

`S.extend(iterable)` – extend sequence by appending elements from the iterable

`index (value[, start[, stop]])` → `integer` -- return first index of value.

Raises `ValueError` if the value is not present.

Supporting `start` and `stop` arguments is optional, but recommended.

`insert (i, item)`

SCons.Tool package

`S.insert(index, value)` – insert value before index

`pop([i, index])` → item -- remove and return item at index (default last).
Raise `IndexError` if list is empty or index is out of range.

`remove(item)`
`S.remove(value)` – remove first occurrence of value. Raise `ValueError` if the value is not present.

`reverse()`
`S.reverse()` – reverse *IN PLACE*

`sort(*args, **kwds)`

`SCons.Script.Variables` (files=None, args={})

`SCons.Script._Add_Arguments` (alist)

`SCons.Script._Add_Targets` (tlist)

`SCons.Script._Get_Default_Targets` (d, fs)

`SCons.Script._Set_Default_Targets` (env, tlist)

`SCons.Script._Set_Default_Targets_Has_Been_Called` (d, fs)

`SCons.Script._Set_Default_Targets_Has_Not_Been_Called` (d, fs)

`SCons.Script.set_missing_sconscript_error` (flag=1)
Set behavior on missing file in `SConscript()` call. Returns previous value

SCons.Tool package

Module contents

`SCons.Tool`

SCons tool selection.

This looks for modules that define a callable object that can modify a construction environment as appropriate for a given tool (or tool chain).

Note that because this subsystem just *selects* a callable that can modify a construction environment, it's possible for people to define their own "tool specification" in an arbitrary callable function. No one needs to use or tie in to this subsystem in order to roll their own tool specifications.

`SCons.Tool.CreateJarBuilder` (env)

The Jar builder expects a list of class files which it can package into a jar file.

The jar tool provides an interface for passing other types of java files such as .java, directories or swig interfaces and will build them to class files in which it can package into the jar.

`SCons.Tool.CreateJavaClassDirBuilder` (env)

`SCons.Tool.CreateJavaClassFileBuilder` (env)

`SCons.Tool.CreateJavaFileBuilder` (env)

`SCons.Tool.CreateJavaHBuilder` (env)

`SCons.Tool.CreateLibSymlinks` (env, symlinks)

Physically creates symlinks. The symlinks argument must be a list in form [(link, linktarget), ...], where link and linktarget are SCons nodes.

`SCons.Tool.EmitLibSymlinks` (env, symlinks, libnode, **kw)

Used by emitters to handle (shared/versioned) library symlinks

`SCons.Tool.FindAllTools` (tools, env)

`SCons.Tool.FindTool` (tools, env)

`SCons.Tool.Initializers` (env)

SCons.Tool package

`SCons.Tool.LibSymlinksActionFunction` (target, source, env)

`SCons.Tool.LibSymlinksStrFun` (target, source, env, *args)

`SCons.Tool.StringizeLibSymlinks` (symlinks)

Converts list with pairs of nodes to list with pairs of node paths (strings). Used mainly for debugging.

`class SCons.Tool.Tool` (name, toolpath=None, **kw)

Bases: `object`

`_load_dotted_module_py2` (short_name, full_name, searchpaths=None)

`_tool_module` ()

`class SCons.Tool.ToolInitializer` (env, tools, names)

Bases: `object`

A class for delayed initialization of Tools modules.

Instances of this class associate a list of Tool modules with a list of Builder method names that will be added by those Tool modules. As part of instantiating this object for a particular construction environment, we also add the appropriate `ToolInitializerMethod` objects for the various Builder methods that we want to use to delay Tool searches until necessary.

`apply_tools` (env)

Searches the list of associated Tool modules for one that exists, and applies that to the construction environment.

`remove_methods` (env)

Removes the methods that were added by the tool initialization so we no longer copy and re-bind them when the construction environment gets cloned.

`class SCons.Tool.ToolInitializerMethod` (name, initializer)

Bases: `object`

This is added to a construction environment in place of a method(s) normally called for a Builder (`env.Object`, `env.StaticObject`, etc.). When called, it has its associated `ToolInitializer` object search the specified list of tools and apply the first one that exists to the construction environment. It then calls whatever builder was (presumably) added to the construction environment in place of this particular instance.

`get_builder` (env)

Returns the appropriate real Builder for this method name after having the associated `ToolInitializer` object apply the appropriate Tool module.

`class SCons.Tool._ImpLibInfoSupport`

Bases: `object`

`get_lib_noversion_symlinks` (env, *args, **kw)

`get_lib_prefix` (env, *args, **kw)

`get_lib_suffix` (env, *args, **kw)

`get_lib_version` (env, *args, **kw)

property `libtype`

`class SCons.Tool._LdModInfoSupport`

Bases: `object`

`get_lib_noversion_symlinks` (env, *args, **kw)

`get_lib_prefix` (env, *args, **kw)

`get_lib_suffix` (env, *args, **kw)

```
get_lib_version (env, *args, **kw)
```

property libtype

```
class SCons.Tool._LibInfoGeneratorBase (libtype, infoname)
```

Bases: **object**

Generator base class for library-related info such as suffixes for versioned libraries, symlink maps, sonames etc. It handles commonities of SharedLibrary and LoadableModule

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversionlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibNameGenerator (libtype)
```

Bases: **SCons.Tool._LibInfoGeneratorBase**

Generates “unmangled” library name from a library file node.

Generally, it’s thought to revert modifications done by prefix/suffix generators (`_LibPrefixGenerator/_LibSuffixGenerator`) used by a library builder. For example, on `gnulink` the suffix generator used by `SharedLibrary` builder appends `$SHLIBVERSION` to `$SHLIBSUFFIX` producing node name which ends with `“$SHLIBSUFFIX.$SHLIBVERSION”`. Correspondingly, the implementation of `_LibNameGenerator` replaces `“$SHLIBSUFFIX.$SHLIBVERSION”` with `“$SHLIBSUFFIX”` in the node’s basename. So that, if `$SHLIBSUFFIX` is `“.so”`, `$SHLIBVERSION` is `“0.1.2”` and the node path is `“/foo/bar/libfoo.so.0.1.2”`, the `_LibNameGenerator` shall return `“libfoo.so”`. Other link tools may implement it’s own way of library name unmangling.

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversionlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibPrefixGenerator (libtype)
```

Bases: **SCons.Tool._LibInfoGeneratorBase**

Library prefix generator, used as `target_prefix` in `SharedLibrary` and `LoadableModule` builders

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibSonameGenerator (libtype)
```

```
Bases: SCons.Tool._LibInfoGeneratorBase
```

```
Library soname generator. Returns library soname (e.g. libfoo.so.0) for a given node (e.g. /foo/bar/libfoo.so.0.1.2)
```

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibSuffixGenerator (libtype)
```

```
Bases: SCons.Tool._LibInfoGeneratorBase
```

```
Library suffix generator, used as target_suffix in SharedLibrary and LoadableModule builders
```

```
_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class 'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}
```

```
generate_versioned_lib_info (env, args, result=None, **kw)
```

```
get_lib_noversion_symlinks (env, *args, **kw)
```

```
get_lib_prefix (env, *args, **kw)
```

```
get_lib_suffix (env, *args, **kw)
```

```
get_lib_version (env, *args, **kw)
```

```
get_versioned_lib_info_generator (**kw)
```

property libtype

```
class SCons.Tool._LibSymlinkGenerator (libtype)
```

```
Bases: SCons.Tool._LibInfoGeneratorBase
```

```
Library symlink map generator. It generates a list of symlinks that should be created by SharedLibrary or LoadableModule builders
```

```

_support_classes = {'ImpLib': <class 'SCons.Tool._ImpLibInfoSupport'>, 'LdMod': <class
'SCons.Tool._LdModInfoSupport'>, 'ShLib': <class 'SCons.Tool._ShLibInfoSupport'>}

generate_versioned_lib_info (env, args, result=None, **kw)

get_lib_noversion_symlinks (env, *args, **kw)

get_lib_prefix (env, *args, **kw)

get_lib_suffix (env, *args, **kw)

get_lib_version (env, *args, **kw)

get_versioned_lib_info_generator (**kw)

property libtype

class SCons.Tool._ShLibInfoSupport
  Bases: object

  get_lib_noversion_symlinks (env, *args, **kw)

  get_lib_prefix (env, *args, **kw)

  get_lib_suffix (env, *args, **kw)

  get_lib_version (env, *args, **kw)

property libtype

SCons.Tool._call_env_subst (env, string, *args, **kw)

SCons.Tool._call_linker_cb (env, callback, args, result=None)
  Returns the result of env['LINKCALLBACKS'][callback](args) if env['LINKCALLBACKS'] is a dictionary and
  env['LINKCALLBACKS'][callback] is callable. If these conditions are not met, return the value provided as the
  *result argument. This function is mainly used for generating library info such as versioned suffixes, symlink maps,
  sonames etc. by delegating the core job to callbacks configured by current linker tool

SCons.Tool.createCFileBuilders (env)
  This is a utility function that creates the CFile/CXXFile Builders in an Environment if they are not there already.
  If they are there already, we return the existing ones.
  This is a separate function because soooo many Tools use this functionality.
  The return is a 2-tuple of (CFile, CXXFile)

SCons.Tool.createLoadableModuleBuilder (env)
  This is a utility function that creates the LoadableModule Builder in an Environment if it is not there already.
  If it is already there, we return the existing one.

SCons.Tool.createObjBuilders (env)
  This is a utility function that creates the StaticObject and SharedObject Builders in an Environment if they are not
  there already.
  If they are there already, we return the existing ones.
  This is a separate function because soooo many Tools use this functionality.
  The return is a 2-tuple of (StaticObject, SharedObject)

SCons.Tool.createProgBuilder (env)
  This is a utility function that creates the Program Builder in an Environment if it is not there already.
  If it is already there, we return the existing one.

SCons.Tool.createSharedLibBuilder (env)
  This is a utility function that creates the SharedLibrary Builder in an Environment if it is not there already.
  If it is already there, we return the existing one.

SCons.Tool.createStaticLibBuilder (env)
  This is a utility function that creates the StaticLibrary Builder in an Environment if it is not there already.

```

If it is already there, we return the existing one.

`SCons.Tool.find_program_path` (env, key_program, default_paths=None)

Find the location of a tool using various means.

Mainly for windows where tools aren't all installed in /usr/bin, etc.

Parameters:

- **env** – Current Construction Environment.
- **key_program** – Tool to locate.
- **default_paths** – List of additional paths this tool might be found in.

`SCons.Tool.tool_list` (platform, env)

SCons.Variables package

Submodules

SCons.Variables.BoolVariable module

`SCons.Variables.BoolVariable`

This file defines the option type for SCons implementing true/false values.

Usage example:

```
opts = Variables()
opts.Add(BoolVariable('embedded', 'build for an embedded system', 0))
...
if env['embedded'] == 1:
...

```

`SCons.Variables.BoolVariable.BoolVariable` (key, help, default)

The input parameters describe a boolean option, thus they are returned with the correct converter and validator appended. The 'help' text will be appended by '(yes|no)' to show the valid values. The result is usable for input to `opts.Add()`.

SCons.Variables.EnumVariable module

`SCons.Variables.EnumVariable`

This file defines the option type for SCons allowing only specified input-values.

Usage example:

```
opts = Variables()
opts.Add(EnumVariable('debug', 'debug output and symbols', 'no',
                    allowed_values=('yes', 'no', 'full'),
                    map={}, ignorecase=2))
...
if env['debug'] == 'full':
...

```

`SCons.Variables.EnumVariable.EnumVariable` (key, help, default, allowed_values, map={}, ignorecase=0)

The input parameters describe an option with only certain values allowed. They are returned with an appropriate converter and validator appended. The result is usable for input to `Variables.Add()`.

'key' and 'default' are the values to be passed on to `Variables.Add()`.

'help' will be appended by the allowed values automatically

'allowed_values' is a list of strings, which are allowed as values for this option.

The 'map'-dictionary may be used for converting the input value into canonical values (e.g. for aliases).

'ignorecase' defines the behaviour of the validator:

If ignorecase == 0, the validator/converter are case-sensitive. If ignorecase == 1, the validator/converter are case-insensitive. If ignorecase == 2, the validator/converter is case-insensitive and the converted value will always be lower-case.

The 'validator' tests whether the value is in the list of allowed values. The 'converter' converts input values according to the given 'map'-dictionary (unmapped input values are returned unchanged).

SCons.Variables.ListVariable module

SCons.Variables.ListVariable

This file defines the option type for SCons implementing 'lists'.

A 'list' option may either be 'all', 'none' or a list of names separated by comma. After the option has been processed, the option value holds either the named list elements, all list elements or no list elements at all.

Usage example:

```
list_of_libs = Split('x11 gl qt ical')

opts = Variables()
opts.Add(ListVariable('shared',
                    'libraries to build as shared libraries',
                    'all',
                    elems = list_of_libs))
...
for lib in list_of_libs:
    if lib in env['shared']:
        env.SharedObject(...)
    else:
        env.Object(...)
```

SCons.Variables.ListVariable.**ListVariable** (key, help, default, names, map={})

The input parameters describe a 'package list' option, thus they are returned with the correct converter and validator appended. The result is usable for input to opts.Add().

A 'package list' option may either be 'all', 'none' or a list of package names (separated by space).

SCons.Variables.PackageVariable module

SCons.Variables.PackageVariable

This file defines the option type for SCons implementing 'package activation'.

To be used whenever a 'package' may be enabled/disabled and the package path may be specified.

Usage example:

Examples:

x11=no (disables X11 support) x11=yes (will search for the package installation dir) x11=/usr/local/X11 (will check this path for existence)

To replace autoconf's `--with-xxx=yyy`

```
opts = Variables()
opts.Add(PackageVariable('x11',
                        'use X11 installed here (yes = search some places',
                        'yes'))
...
if env['x11'] == True:
    dir = ... search X11 in some standard places ...
    env['x11'] = dir
if env['x11']:
    ... build with x11 ...
```

SCons.Variables.PackageVariable.**PackageVariable** (key, help, default, searchfunc=None)

The input parameters describe a 'package list' option, thus they are returned with the correct converter and validator appended. The result is usable for input to `opts.Add()`.

A 'package list' option may either be 'all', 'none' or a list of package names (separated by space).

SCons.Variables.PathVariable module

SCons.Variables.PathVariable

This file defines an option type for SCons implementing path settings.

To be used whenever a user-specified path override should be allowed.

Arguments to PathVariable are:

option-name = name of this option on the command line (e.g. "prefix")
 option-help = help string for option
 option-dflt = default value for this option
 validator = [optional] validator for option value. Predefined validators are:

PathAccept – accepts any path setting; no validation
 PathIsDir – path must be an existing directory
 PathIsDirCreate – path must be a dir; will create
 PathIsFile – path must be a file
 PathExists – path must exist (any type) [default]

The validator is a function that is called and which should return True or False to indicate if the path is valid. The arguments to the validator function are: (key, val, env). The key is the name of the option, the val is the path specified for the option, and the env is the env to which the Options have been added.

Usage example:

```
Examples:
    prefix=/usr/local

opts = Variables()

opts = Variables()
opts.Add(PathVariable('qtdir',
                     'where the root of Qt is installed',
                     qtdir, PathIsDir))
opts.Add(PathVariable('qt_includes',
                     'where the Qt includes are installed',
                     '$qtdir/includes', PathIsDirCreate))
opts.Add(PathVariable('qt_libraries',
                     'where the Qt library is installed',
                     '$qtdir/lib'))
```

Module contents

SCons.Variables

This file defines the Variables class that is used to add user-friendly customizable variables to an SCons build.

```
class SCons.Variables.Variables (files=None, args=None, is_global=True)
```

Bases: **object**

Holds all the options, updates the environment with the variables, and renders the help text.

If `is_global` is True, this is a singleton, create only once.

Parameters:

- **files** (*optional*) – List of option configuration files to load (backward compatibility). If a single string is passed it is automatically placed in a file list (Default value = None)
- **args** (*optional*) – dictionary to override values set from *files*. (Default value = None)
- **is_global** (*optional*) – global instance? (Default value = True)

```
Add (key, help=' ', default=None, validator=None, converter=None, **kw)
```

Add an option.

Parameters:

- **key** – the name of the variable, or a list or tuple of arguments
- **help** – optional help text for the options (Default value = "")
- **default** – optional default value for option (Default value = None)
- **validator** – optional function called to validate the option's value (Default value = None)
- **converter** – optional function to be called to convert the option's value before putting it in the environment. (Default value = None)
- ****kw** – keyword args, unused.

AddVariables (*optlist)

Add a list of options.

Each list element is a tuple/list of arguments to be passed on to the underlying method for adding options.

Example:

```
opt.AddVariables(
    ('debug', '', 0),
    ('CC', 'The C compiler'),
    ('VALIDATE', 'An option for testing validation', 'notset', validator, None),
)
```

FormatVariableHelpText (env, key, help, default, actual, aliases=[])**GenerateHelpText (env, sort=None)**

Generate the help text for the options.

env - an environment that is used to get the current values

of the options.

cmp - Either a function as follows: The specific sort function should take two arguments and return -1, 0 or 1

or a boolean to indicate if it should be sorted.

Save (filename, env)

Saves all the options in the given file. This file can then be used to load the options next run. This can be used to create an option cache file.

filename - Name of the file to save into env - the environment get the option values from

UnknownVariables ()

Returns any options in the specified arguments lists that were not known, declared options in this object.

Update (env, args=None)

Update an environment with the option variables.

env - the environment to update.

_do_add (key, help='', default=None, validator=None, converter=None)

format = '\n%s: %s\n default: %s\n actual: %s\n'

format_ = '\n%s: %s\n default: %s\n actual: %s\n aliases: %s\n'

instance = None

keys ()

Returns the keywords for the options

Indices and Tables

Indices and Tables

- `genindex`
- `modindex`
- `search`

Index

- `__libversionflags()` (in module `SCons.Defaults`)
- `_abc_impl` (`SCons.Builder.ListEmitter` attribute)
 - (`SCons.Builder.OverrideWarner` attribute)
 - (`SCons.Environment.BuilderDict` attribute)
 - (`SCons.Executor.TSList` attribute)
 - (`SCons.Node.Alias.AliasNameSpace` attribute)
 - (`SCons.Node.NodeList` attribute)
 - (`SCons.SConf.SConfBuildTask` attribute)
 - (`SCons.Script.Main.BuildTask` attribute)
 - (`SCons.Script.Main.CleanTask` attribute)
 - (`SCons.Script.Main.QuestionTask` attribute)
 - (`SCons.Script.TargetList` attribute)
 - (`SCons.Subst.CmdStringHolder` attribute)
 - (`SCons.Subst.ListSubber` attribute)
 - (`SCons.Subst.Targets_or_Sources` attribute)
 - (`SCons.Taskmaster.AlwaysTask` attribute)
 - (`SCons.Taskmaster.OutOfDateTask` attribute)
 - (`SCons.Taskmaster.Task` attribute)
 - (`SCons.Util.CLVar` attribute)
 - (`SCons.Util.NodeList` attribute)
 - (`SCons.Util.UniqueList` attribute)
- `_abspath` (`SCons.Node.FS.Base` attribute)
 - (`SCons.Node.FS.Dir` attribute)
 - (`SCons.Node.FS.Entry` attribute)
 - (`SCons.Node.FS.File` attribute)
 - (`SCons.Node.FS.RootDir` attribute)
- `_ActionAction` (class in `SCons.Action`)
- `_actionAppend()` (in module `SCons.Action`)
- `_Add_Arguments()` (in module `SCons.Script`)
- `_add_child()` (`SCons.Node.Alias.Alias` method)
 - (`SCons.Node.FS.Base` method)
 - (`SCons.Node.FS.Dir` method)
 - (`SCons.Node.FS.Entry` method)
 - (`SCons.Node.FS.File` method)
 - (`SCons.Node.FS.RootDir` method)
 - (`SCons.Node.Node` method)
 - (`SCons.Node.Python.Value` method)
- `_add_Default()` (`SCons.Script.TargetList` method)
- `_add_help_option()`
(`SCons.Script.SConsOptions.SConsOptionParser` method)
- `_add_strings_to_dependency_map()`
(`SCons.Node.FS.File` method)
- `_Add_Targets()` (in module `SCons.Script`)
- `_add_version_option()`
(`SCons.Script.SConsOptions.SConsOptionParser` method)
- `_adjustixes()` (`SCons.Builder.BuilderBase` method)
- `_bootstrap()` (`SCons.Job.Worker` method)
- `_bootstrap_inner()` (`SCons.Job.Worker` method)
- `_build_dependency_map()` (`SCons.Node.FS.File` method)
- `_build_targets()` (in module `SCons.Script.Main`)
- `_CacheDir` (`SCons.Executor.NullEnvironment` attribute)
- `_CacheDir_path` (`SCons.Executor.NullEnvironment` attribute)
- `_call_env_subst()` (in module `SCons.Tool`)
- `_call_linker_cb()` (in module `SCons.Tool`)
- `_callable_contents()` (in module `SCons.Action`)
- `_canonicalize()` (`SCons.Environment.Base` method)
 - (`SCons.Environment.OverrideEnvironment` method)
 - (`SCons.Script.SConscript.SConsEnvironment` method)
- `_changed_build()` (`SCons.Environment.Base` method)
 - (`SCons.Environment.OverrideEnvironment` method)
 - (`SCons.Script.SConscript.SConsEnvironment` method)
- `_changed_content()` (`SCons.Environment.Base` method)
 - (`SCons.Environment.OverrideEnvironment` method)
 - (`SCons.Script.SConscript.SConsEnvironment` method)
- `_changed_source()` (`SCons.Environment.Base` method)
 - (`SCons.Environment.OverrideEnvironment` method)
 - (`SCons.Script.SConscript.SConsEnvironment` method)
- `_changed_sources_list` (`SCons.Executor.Executor` attribute)
 - (`SCons.Executor.Null` attribute)
- `_changed_targets_list` (`SCons.Executor.Executor` attribute)
 - (`SCons.Executor.Null` attribute)

_changed_timestamp_match()
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

_changed_timestamp_newer()
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

_changed_timestamp_then_content()
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

_check_action()
 (SCons.Script.SConsOptions.SConsOption method)

_check_callback()
 (SCons.Script.SConsOptions.SConsOption method)

_check_choice()
 (SCons.Script.SConsOptions.SConsOption method)

_check_conflict()
 (SCons.Script.SConsOptions.SConsOptionGroup method)
 (SCons.Script.SConsOptions.SConsOptionParser method)

_check_const()
 (SCons.Script.SConsOptions.SConsOption method)

_check_dest()
 (SCons.Script.SConsOptions.SConsOption method)

_check_empty_program() (in module SCons.Conftest)

_check_nargs()
 (SCons.Script.SConsOptions.SConsOption method)

_check_nargs_optional()
 (SCons.Script.SConsOptions.SConsOption method)

_check_opt_strings()
 (SCons.Script.SConsOptions.SConsOption method)

_check_type()
 (SCons.Script.SConsOptions.SConsOption method)

_check_writable() (SCons.dblite.dblite method)

_children_get() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)

 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)

_children_reset() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)

_classEntry (in module SCons.Node.FS)

_clean_targets() (SCons.Script.Main.CleanTask method)

_clear() (SCons.Script.TargetList method)

_code_contents() (in module SCons.Action)

_concat() (in module SCons.Defaults)

_concat_ixes() (in module SCons.Defaults)

_copy2_from_cache() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)

 (SCons.Script.SConscript.SConsEnvironment method)

_copy_from_cache() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)

 (SCons.Script.SConscript.SConsEnvironment method)

_copy_func() (in module SCons.Node.FS)

_create() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)

_create_nodelist() (SCons.Subst.NLWrapper method)

_create_nodes() (SCons.Builder.BuilderBase method)

_create_option_list()
 (SCons.Script.SConsOptions.SConsOptionGroup method)
 (SCons.Script.SConsOptions.SConsOptionParser method)

_create_option_mappings()
 (SCons.Script.SConsOptions.SConsOptionGroup method)
 (SCons.Script.SConsOptions.SConsOptionParser method)

_create_path() (in module SCons.Script.Main)

_createConfigH() (in module SCons.SConf)

_createDir() (SCons.Node.FS.File method)
 (SCons.SConf.SConfBase method)

_createSource() (in module SCons.SConf)

_defines() (in module SCons.Defaults)

_del_SCANNERS() (in module SCons.Environment)

_delete() (SCons.Job.Worker method)

_delete_duplicates() (in module SCons.Environment)

_Dir__clearRepositoryCache() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)

_Dir__resetDuplicate() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)

_do_add() (SCons.Variables.Variables method)

_do_create_action() (in module SCons.Action)

_do_create_keywords() (in module SCons.Action)

_do_create_list_action() (in module SCons.Action)

_do_execute (SCons.Executor.Executor attribute)
 (SCons.Executor.Null attribute)

_do_if_else_condition()
 (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)

_do_nothing() (SCons.Script.TargetList method)

_do_one_help()
 (SCons.Script.Interactive.SConsInteractiveCmd method)

_doc_to_help()
 (SCons.Script.Interactive.SConsInteractiveCmd method)

_dump_one_caller() (in module SCons.Debug)

_enable_virtualenv_default() (in module SCons.Platform.virtualenv)

_EntryProxy__get_abspath()
 (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_base_path()
 (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_dir() (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_file() (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_filebase()
 (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_posix_path()
 (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_rsrcdir()
 (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_rsrcnode()
 (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_srcdir() (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_srcnode()
 (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_suffix() (SCons.Node.FS.EntryProxy method)

_EntryProxy__get_windows_path()
 (SCons.Node.FS.EntryProxy method)

_exc_info() (SCons.Job.Worker method)

_exceeds_version()
 (SCons.Script.SConscript.SConsEnvironment method)

_exception_raise() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)

_exec_main() (in module SCons.Script.Main)

_execute() (SCons.Builder.BuilderBase method)

_execute_str (SCons.Executor.Executor attribute)
 (SCons.Executor.Null attribute)

_exercise() (in module SCons.dblite)

_fetch_DefaultEnvironment() (in module SCons.Defaults)

_File__dmap_cache (SCons.Node.FS.File attribute)

_File__dmap_sig_cache (SCons.Node.FS.File attribute)

_find_file_key() (SCons.Node.FS.FileFinder method)

_find_next_ready_node()
 (SCons.Taskmaster.Taskmaster method)

_find_toolpath_dir() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

_format_text() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)

_func_exists (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 _func_get_contents (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 _func_is_derived (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 _func_rexists (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 _func_sconsign (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 _func_target_from_source (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)

_function_contents() (in module SCons.Action)
 _gen_nodelist() (SCons.Subst.NLWrapper method)
 _generate() (SCons.Action.CommandGeneratorAction method)
 (SCons.Action.LazyAction method)
 _generate_cache() (SCons.Action.LazyAction method)
 _get_all_options()
 (SCons.Script.SConsOptions.SConsOptionParser method)
 _get_args()
 (SCons.Script.SConsOptions.SConsOptionParser method)
 _get_changed_sources() (SCons.Executor.Executor method)
 _get_changed_targets() (SCons.Executor.Executor method)
 _get_changes() (SCons.Executor.Executor method)
 _Get_Default_Targets() (in module SCons.Script)
 _get_files_to_clean() (SCons.Script.Main.CleanTask method)
 _get_found_includes_key() (SCons.Node.FS.File method)
 _get_implicit_deps_heavyweight()
 (SCons.Action.CommandAction method)
 (SCons.Action.LazyAction method)
 _get_implicit_deps_lightweight()
 (SCons.Action.CommandAction method)
 (SCons.Action.LazyAction method)
 _get_major_minor_revision()
 (SCons.Script.SConscript.SConsEnvironment method)
 _get_previous_signatures() (SCons.Node.FS.File method)
 _get_scanner() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 _get_SConscript_filenames()
 (SCons.Script.SConscript.SConsEnvironment method)
 _get_sdict() (SCons.Builder.BuilderBase method)
 _get_source() (SCons.Executor.Executor method)
 _get_sources() (SCons.Executor.Executor method)
 _get_src_builders_key() (SCons.Builder.BuilderBase method)

<code>_get_str()</code> (SCons.Node.FS.Base method)	(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Dir method)	(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.Entry method)	(SCons.Node.FS.File attribute)
(SCons.Node.FS.File method)	(SCons.Node.FS.RootDir attribute)
(SCons.Node.FS.RootDir method)	<code>_lang2suffix()</code> (in module SCons.Conftest)
<code>_get_target()</code> (SCons.Executor.Executor method)	<code>_latex_names()</code> (SCons.Scanner.LaTeX.LaTeX method)
<code>_get_targets()</code> (SCons.Executor.Executor method)	<code>_LdModInfoSupport</code> (class in SCons.Tool)
<code>_get_unchanged_sources()</code> (SCons.Executor.Executor method)	<code>_LibInfoGeneratorBase</code> (class in SCons.Tool)
<code>_get_unchanged_targets()</code> (SCons.Executor.Executor method)	<code>_LibNameGenerator</code> (class in SCons.Tool)
<code>_get_unignored_sources_key()</code> (SCons.Executor.Executor method)	<code>_LibPrefixGenerator</code> (class in SCons.Tool)
<code>_glob1()</code> (SCons.Node.FS.Base method)	<code>_LibSonameGenerator</code> (class in SCons.Tool)
(SCons.Node.FS.Dir method)	<code>_LibSuffixGenerator</code> (class in SCons.Tool)
(SCons.Node.FS.Entry method)	<code>_LibSymlinkGenerator</code> (class in SCons.Tool)
(SCons.Node.FS.File method)	<code>_load_all_site_scons_dirs()</code> (in module SCons.Script.Main)
(SCons.Node.FS.RootDir method)	<code>_load_dotted_module_py2()</code> (SCons.Tool.Tool method)
<code>_gsm()</code> (SCons.Environment.Base method)	<code>_load_site_scons_dir()</code> (in module SCons.Script.Main)
(SCons.Environment.OverrideEnvironment method)	<code>_local</code> (SCons.Node.FS.Base attribute)
(SCons.Script.SConscript.SConsEnvironment method)	(SCons.Node.FS.Dir attribute)
<code>_hardlink_func()</code> (in module SCons.Node.FS)	(SCons.Node.FS.Entry attribute)
<code>_Have()</code> (in module SCons.Conftest)	(SCons.Node.FS.File attribute)
<code>_ignore_virtualenv_default()</code> (in module SCons.Platform.virtualenv)	(SCons.Node.FS.RootDir attribute)
<code>_ImpLibInfoSupport</code> (class in SCons.Tool)	<code>_LogFailed()</code> (in module SCons.Conftest)
<code>_init_parsing_state()</code> (SCons.Script.SConsOptions.SConsOptionParser method)	<code>_lookup()</code> (SCons.Node.FS.FS method)
<code>_init_special()</code> (SCons.Environment.Base method)	<code>_lookup_abs()</code> (SCons.Node.FS.RootDir method)
(SCons.Environment.OverrideEnvironment method)	<code>_lookupDict</code> (SCons.Node.FS.RootDir attribute)
(SCons.Environment.SubstitutionEnvironment method)	<code>_main()</code> (in module SCons.Script.Main)
(SCons.Script.SConscript.SConsEnvironment method)	<code>_match_long_opt()</code> (SCons.Script.SConsOptions.SConsOptionParser method)
<code>_initialized</code> (SCons.Job.Worker attribute)	<code>_match_tuples()</code> (SCons.cpp.DumbPreProcessor method)
<code>_inject_venv_path()</code> (in module SCons.Platform.virtualenv)	(SCons.cpp.PreProcessor method)
<code>_inject_venv_variables()</code> (in module SCons.Platform.virtualenv)	(SCons.Scanner.C.SConsCPPConditionalScanner method)
<code>_instance</code> (SCons.Subst.NullNodeList attribute)	(SCons.Scanner.C.SConsCPPScanner method)
<code>_is_path_in()</code> (in module SCons.Platform.virtualenv)	<code>_memo</code> (SCons.Executor.Executor attribute)
<code>_labspath</code> (SCons.Node.FS.Base attribute)	(SCons.Executor.Null attribute)
	(SCons.Node.Alias.Alias attribute)
	(SCons.Node.FS.Base attribute)
	(SCons.Node.FS.Dir attribute)
	(SCons.Node.FS.Entry attribute)
	(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 _morph() (SCons.Executor.Null method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 __MutableMapping__ marker
 (SCons.Builder.OverrideWarner attribute)
 (SCons.Environment.BuilderDict attribute)
 (SCons.Node.Alias.AliasNameSpace attribute)
 _my_normcase() (in module SCons.Node.FS)
 _my_splitdrive() (in module SCons.Node.FS)
 _no_exception_to_raise()
 (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 _node_errors() (in module SCons.Builder)
 _NoError
 _null (class in SCons.Action)
 _Null (class in SCons.Builder)
 (class in SCons.Environment)
 (class in SCons.Node.FS)
 (class in SCons.Scanner)
 (class in SCons.Scanner.LaTeX)
 _null (in module SCons.Builder)
 (in module SCons.Environment)
 (in module SCons.Scanner)
 (in module SCons.Scanner.LaTeX)
 _object_contents() (in module SCons.Action)
 _object_instance_content() (in module SCons.Action)
 _open() (SCons.dblite.dblite method)
 _os_chmod() (SCons.dblite.dblite method)
 _os_chown() (SCons.dblite.dblite method)
 _os_rename() (SCons.dblite.dblite method)
 _os_unlink() (SCons.dblite.dblite method)
 _parse_tuples() (SCons.cpp.DumbPreProcessor
 method)
 (SCons.cpp.PreProcessor method)

(SCons.Scanner.C.SConsCPPConditionalScanner
 method)
 (SCons.Scanner.C.SConsCPPScanner method)
 _path (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 _path_elements (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 _PathList (class in SCons.PathList)
 _pickle_dump() (SCons.dblite.dblite static method)
 _pickle_protocol (SCons.dblite.dblite attribute)
 _populate_option_list()
 (SCons.Script.SConsOptions.SConsOptionParser
 method)
 _print_cmd_str() (SCons.Platform.TempFileMunge
 method)
 _process_args()
 (SCons.Script.SConsOptions.SConsOptionParser
 method)
 _process_long_opt()
 (SCons.Script.SConsOptions.SConsOptionParser
 method)
 _process_short_opts()
 (SCons.Script.SConsOptions.SConsOptionParser
 method)
 _process_tuples() (SCons.cpp.DumbPreProcessor
 method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner
 method)
 (SCons.Scanner.C.SConsCPPScanner method)
 _proxy (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 _readconfig() (SCons.CacheDir.CacheDir method)
 _recurse_all_nodes() (SCons.Scanner.Base method)
 (SCons.Scanner.Classic method)
 (SCons.Scanner.ClassicCPP method)
 (SCons.Scanner.Current method)

(SCons.Scanner.D.D method)

(SCons.Scanner.Fortran.F90Scanner method)

(SCons.Scanner.LaTeX.LaTeX method)

(SCons.Scanner.Selector method)

`_recurse_no_nodes()` (SCons.Scanner.Base method)

(SCons.Scanner.Classic method)

(SCons.Scanner.ClassicCPP method)

(SCons.Scanner.Current method)

(SCons.Scanner.D.D method)

(SCons.Scanner.Fortran.F90Scanner method)

(SCons.Scanner.LaTeX.LaTeX method)

(SCons.Scanner.Selector method)

`_rel_path_key()` (SCons.Node.FS.Dir method)

(SCons.Node.FS.RootDir method)

`_remove_list()` (in module SCons.Subst)

`_reset_internal_locks()` (SCons.Job.Worker method)

`_reset_sig_handler()` (SCons.Job.Jobs method)

`_return_nodelist()` (SCons.Subst.NLWrapper method)

`_Rfindalldirs_key()` (SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

`_rm_list()` (in module SCons.Subst)

`_rmv_existing()` (SCons.Node.FS.File method)

`_run_exitfuncs()` (in module SCons.exitfuncs)

`_running_in_virtualenv()` (in module SCons.Platform.virtualenv)

`_save_str()` (SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

`_scons_internal_error()` (in module SCons.Script.Main)

`_scons_internal_warning()` (in module SCons.Script.Main)

`_scons_syntax_error()` (in module SCons.Script.Main)

`_scons_user_error()` (in module SCons.Script.Main)

`_scons_user_warning()` (in module SCons.Script.Main)

`_SConscript()` (in module SCons.Script.SConscript)

`_sconsign` (SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

(SCons.Node.FS.Base attribute)

(SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

(SCons.Node.Node attribute)

(SCons.Node.Python.Value attribute)

`_srcdir_find_file_key()` (SCons.Node.FS.Dir method)

(SCons.Node.FS.RootDir method)

`_startup()` (SCons.SConf.SConfBase method)

`_stop()` (SCons.Job.Worker method)

`_string_from_cmd_list()` (in module SCons.Action)

`_stringConfigH()` (in module SCons.SConf)

(SCons.Node.FS.RootDir attribute)

`_SConstruct_exists()` (in module SCons.Script.Main)

`_semi_deepcopy_list()` (in module SCons.Util)

`_semi_deepcopy_tuple()` (in module SCons.Util)

`_set_attrs()` (SCons.Script.SConsOptions.SConsOption method)

`_set_BUILDERS()` (in module SCons.Environment)

`_set_debug_values()` (in module SCons.Script.Main)

`_Set_Default_Targets()` (in module SCons.Script)

`_Set_Default_Targets_Has_Been_Called()` (in module SCons.Script)

`_Set_Default_Targets_Has_Not_Been_Called()` (in module SCons.Script)

`_set_future_reserved()` (in module SCons.Environment)

`_set_ident()` (SCons.Job.Worker method)

`_set_opt_strings()` (SCons.Script.SConsOptions.SConsOption method)

`_set_reserved()` (in module SCons.Environment)

`_set_SCANNERS()` (in module SCons.Environment)

`_set_tstate_lock()` (SCons.Job.Worker method)

`_setup_sig_handler()` (SCons.Job.Jobs method)

`_share_option_mappings()` (SCons.Script.SConsOptions.SConsOptionGroup method)

(SCons.Script.SConsOptions.SConsOptionParser method)

`_ShLibInfoSupport` (class in SCons.Tool)

`_shutdown()` (SCons.SConf.SConfBase method)

`_shutil_copyfile()` (SCons.dblite.dblite method)

`_softlink_func()` (in module SCons.Node.FS)

`_specific_sources` (SCons.Node.Alias.Alias attribute)

_stringSource() (in module SCons.SConf)
 _strip_initial_spaces()
 (SCons.Script.Interactive.SConsInteractiveCmd
 method)
 _stripixes() (in module SCons.Defaults)
 _subproc() (in module SCons.Action)
 _subst_libs() (in module SCons.Scanner.Prog)
 _subst_src_suffixes_key() (SCons.Builder.BuilderBase
 method)
 _support_classes (SCons.Tool._LibInfoGeneratorBase
 attribute)
 (SCons.Tool._LibNameGenerator attribute)
 (SCons.Tool._LibPrefixGenerator attribute)
 (SCons.Tool._LibSonameGenerator attribute)
 (SCons.Tool._LibSuffixGenerator attribute)
 (SCons.Tool._LibSymlinkGenerator attribute)
 _tags (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 _time_time() (SCons.dblite.dblite method)
 _tool_module() (SCons.Tool.Tool method)
 _tpath (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 _unchanged_sources_list (SCons.Executor.Executor
 attribute)
 (SCons.Executor.Null attribute)
 _unchanged_targets_list (SCons.Executor.Executor
 attribute)
 (SCons.Executor.Null attribute)
 _UniqueList__make_unique() (SCons.Util.UniqueList
 method)
 _update() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConsScript.SConsEnvironment
 method)
 (SCons.Script.SConsOptions.SConsValues
 method)
 _update_careful()
 (SCons.Script.SConsOptions.SConsValues method)
 _update_loose()
 (SCons.Script.SConsOptions.SConsValues method)
 _update_onlynew() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConsScript.SConsEnvironment
 method)
 _UserList__cast() (SCons.Builder.ListEmitter method)
 (SCons.Executor.TSList method)
 (SCons.Node.NodeList method)
 (SCons.Script.TargetList method)
 (SCons.Subst.ListSubber method)
 (SCons.Subst.Targets_or_Sources method)
 (SCons.Util.CLVar method)
 (SCons.Util.NodeList method)
 (SCons.Util.UniqueList method)
 _validate_pending_children()
 (SCons.Taskmaster.Taskmaster method)
 _wait_for_tstate_lock() (SCons.Job.Worker method)
 _YesNoResult() (in module SCons.Conftest)

A

abspath (SCons.Node.FS.RootDir attribute)
 action (SCons.Errors.BuildError attribute)
 Action() (in module SCons.Action)
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConsScript.SConsEnvironment
 method)
 action_list (SCons.Executor.Executor attribute)
 (SCons.Executor.Null attribute)
 ActionBase (class in SCons.Action)
 ActionCaller (class in SCons.Action)
 ActionFactory (class in SCons.Action)
 ACTIONS (SCons.Script.SConsOptions.SConsOption
 attribute)
 Add() (SCons.Variables.Variables method)
 add_action() (SCons.Builder.CompositeBuilder
 method)
 (SCons.Builder.DictCmdGenerator method)
 add_batch() (SCons.Executor.Executor method)
 add_dependency() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
add_emitter() (SCons.Builder.BuilderBase method)
add_ignore() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
add_local_option()
(SCons.Script.Main.FakeOptionParser method)
(SCons.Script.SConsOptions.SConsOptionParser method)
add_new_word() (SCons.Subst.ListSubber method)
add_option()
(SCons.Script.SConsOptions.SConsOptionGroup method)
(SCons.Script.SConsOptions.SConsOptionParser method)
add_option_group()
(SCons.Script.SConsOptions.SConsOptionParser method)
add_options()
(SCons.Script.SConsOptions.SConsOptionGroup method)
(SCons.Script.SConsOptions.SConsOptionParser method)
add_post_action() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
add_pre_action() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
add_prerequisite() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
add_scanner() (SCons.Scanner.Base method)
(SCons.Scanner.Classic method)
(SCons.Scanner.ClassicCPP method)
(SCons.Scanner.Current method)
(SCons.Scanner.D.D method)
(SCons.Scanner.Fortran.F90Scanner method)
(SCons.Scanner.LaTeX.LaTeX method)
(SCons.Scanner.Selector method)
add_skey() (SCons.Scanner.Base method)
(SCons.Scanner.Classic method)
(SCons.Scanner.ClassicCPP method)
(SCons.Scanner.Current method)
(SCons.Scanner.D.D method)
(SCons.Scanner.Fortran.F90Scanner method)
(SCons.Scanner.LaTeX.LaTeX method)
(SCons.Scanner.Selector method)
add_source() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
add_sources() (SCons.Executor.Executor method)
add_src_builder() (SCons.Builder.BuilderBase method)
add_to_current_word() (SCons.Subst.ListSubber method)
add_to_implicit() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
add_to_waiting_parents() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

add_to_waiting_s_e() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

add_wkid() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

AddBatchExecutor() (in module SCons.Executor)

AddMethod() (in module SCons.Util)

(SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Environment.SubstitutionEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

AddOption() (in module SCons.Script.Main)

AddPathIfNotExists() (in module SCons.Util)

AddPostAction() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

AddPreAction() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

addRepository() (SCons.Node.FS.Dir method)

(SCons.Node.FS.RootDir method)

AddTest() (SCons.SConf.SConfBase method)

AddTests() (SCons.SConf.SConfBase method)

AddVariables() (SCons.Variables.Variables method)

adjust_suffix() (SCons.Builder.BuilderBase method)

adjustixes() (in module SCons.Util)

Alias (class in SCons.Node.Alias)

Alias() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Node.Alias.AliasNameSpace method)

(SCons.Script.SConscript.SConsEnvironment method)

Alias.Attrs (class in SCons.Node.Alias)

alias_builder() (in module SCons.Environment)

AliasBuildInfo (class in SCons.Node.Alias)

AliasNameSpace (class in SCons.Node.Alias)

AliasNodeInfo (class in SCons.Node.Alias)

all_children() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

all_include() (SCons.cpp.DumbPreProcessor method)

(SCons.cpp.PreProcessor method)

(SCons.Scanner.C.SConsCPPConditionalScanner method)

(SCons.Scanner.C.SConsCPPScanner method)

alter_targets() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

always_build (SCons.Node.Alias.Alias attribute)

(SCons.Node.FS.Base attribute)

(SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

(SCons.Node.Node attribute)

(SCons.Node.Python.Value attribute)

ALWAYS_TYPED_ACTIONS
 (SCons.Script.SConsOptions.SConsOption attribute)

AlwaysBuild() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

AlwaysTask (class in SCons.Taskmaster)

Annotate() (in module SCons.Node)

annotate() (in module SCons.Script.SConscript)

append() (SCons.Builder.ListEmitter method)

Append() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)

append() (SCons.Executor.TSList method)
 (SCons.Node.NodeList method)

Append() (SCons.Script.SConscript.SConsEnvironment method)

append() (SCons.Script.TargetList method)
 (SCons.Subst.ListSubber method)
 (SCons.Subst.Targets_or_Sources method)
 (SCons.Util.CLVar method)
 (SCons.Util.NodeList method)
 (SCons.Util.UniqueList method)

AppendENVPPath() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

AppendLIBS() (SCons.SConf.CheckContext method)

AppendPath() (in module SCons.Util)

AppendUnique() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

apply_tools() (in module SCons.Environment)
 (SCons.Tool.ToolInitializer method)

ArchDefinition (class in SCons.Platform.win32)

arg2nodes() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

args (SCons.Errors.BuildError attribute)
 (SCons.Errors.ExplicitExit attribute)
 (SCons.Errors.InternalError attribute)
 (SCons.Errors.MSVCErrors attribute)
 (SCons.Errors.SConsEnvironmentError attribute)
 (SCons.Errors.StopError attribute)
 (SCons.Errors.UserError attribute)
 (SCons.Node.FS.EntryProxyAttributeError attribute)
 (SCons.Node.FS.FileBuildInfoFileToCsigMappingError attribute)
 (SCons.SConf.ConfigureCacheError attribute)
 (SCons.SConf.ConfigureDryRunError attribute)
 (SCons.SConf.SConfError attribute)
 (SCons.SConf.SConfWarning attribute)
 (SCons.Script.Main.SConsPrintHelpException attribute)
 (SCons.Script.SConscript.SConscriptReturn attribute)
 (SCons.Util._NoError attribute)
 (SCons.Util.PlainWindowsError attribute)
 (SCons.Warnings.CacheVersionWarning attribute)
 (SCons.Warnings.CacheWriteErrorWarning attribute)
 (SCons.Warnings.CorruptSConsignWarning attribute)
 (SCons.Warnings.DependencyWarning attribute)
 (SCons.Warnings.DeprecatedDebugOptionsWarning attribute)
 (SCons.Warnings.DeprecatedMissingSConscriptWarning attribute)
 (SCons.Warnings.DeprecatedOptionsWarning attribute)
 (SCons.Warnings.DeprecatedSourceCodeWarning attribute)
 (SCons.Warnings.DeprecatedWarning attribute)
 (SCons.Warnings.DevelopmentVersionWarning attribute)
 (SCons.Warnings.DuplicateEnvironmentWarning attribute)
 (SCons.Warnings.FortranCxxMixWarning attribute)
 (SCons.Warnings.FutureDeprecatedWarning attribute)
 (SCons.Warnings.FutureReservedVariableWarning attribute)
 (SCons.Warnings.LinkWarning attribute)
 (SCons.Warnings.MandatoryDeprecatedWarning attribute)
 (SCons.Warnings.MisleadingKeywordsWarning attribute)
 (SCons.Warnings.MissingSConscriptWarning attribute)

(SCons.Warnings.NoObjectCountWarning attribute)
(SCons.Warnings.NoParallelSupportWarning attribute)
(SCons.Warnings.PythonVersionWarning attribute)
(SCons.Warnings.ReservedVariableWarning attribute)
(SCons.Warnings.StackSizeWarning attribute)
(SCons.Warnings.TargetNotBuiltWarning attribute)
(SCons.Warnings.TaskmasterNeedsExecuteWarning attribute)
(SCons.Warnings.VisualCMissingWarning attribute)
(SCons.Warnings.VisualStudioMissingWarning attribute)
(SCons.Warnings.visualVersionMismatch attribute)
(SCons.Warnings.Warning attribute)
(SCons.Warnings.WarningOnByDefault attribute)
attributes (SCons.Node.Alias.Alias attribute)
(SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)
(SCons.Node.Node attribute)
(SCons.Node.Python.Value attribute)
ATTRS (SCons.Script.SConsOptions.SConsOption attribute)

B

backtick() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Environment.SubstitutionEnvironment method)
(SCons.Script.SConscript.SConsEnvironment method)
bact (SCons.Node.Alias.AliasBuildInfo attribute)
(SCons.Node.BuildInfoBase attribute)
(SCons.Node.FS.DirBuildInfo attribute)
(SCons.Node.FS.FileBuildInfo attribute)
(SCons.Node.Python.ValueBuildInfo attribute)
(SCons.SConf.SConfBuildInfo attribute)
bactsig (SCons.Node.Alias.AliasBuildInfo attribute)
(SCons.Node.BuildInfoBase attribute)
(SCons.Node.FS.DirBuildInfo attribute)
(SCons.Node.FS.FileBuildInfo attribute)
(SCons.Node.Python.ValueBuildInfo attribute)
(SCons.SConf.SConfBuildInfo attribute)
(SCons.Node.Python.ValueBuildInfo attribute)
(SCons.SConf.SConfBuildInfo attribute)
Base (class in SCons.Environment)
(class in SCons.Node.FS)
(class in SCons.Scanner)
(class in SCons.SConsign)
Base.Attrs (class in SCons.Node.FS)
Batch (class in SCons.Executor)
batch_key() (SCons.Action._ActionAction method)
(SCons.Action.ActionBase method)
(SCons.Action.CommandAction method)
(SCons.Action.CommandGeneratorAction method)
(SCons.Action.FunctionAction method)
(SCons.Action.LazyAction method)
(SCons.Action.ListAction method)
batches (SCons.Executor.Executor attribute)
(SCons.Executor.Null attribute)
bdepends (SCons.Node.Alias.AliasBuildInfo attribute)
(SCons.Node.BuildInfoBase attribute)
(SCons.Node.FS.DirBuildInfo attribute)
(SCons.Node.FS.FileBuildInfo attribute)
(SCons.Node.Python.ValueBuildInfo attribute)
(SCons.SConf.SConfBuildInfo attribute)
bdependsigs (SCons.Node.Alias.AliasBuildInfo attribute)
(SCons.Node.BuildInfoBase attribute)
(SCons.Node.FS.DirBuildInfo attribute)
(SCons.Node.FS.FileBuildInfo attribute)
(SCons.Node.Python.ValueBuildInfo attribute)
(SCons.SConf.SConfBuildInfo attribute)
bimplicit (SCons.Node.Alias.AliasBuildInfo attribute)
(SCons.Node.BuildInfoBase attribute)
(SCons.Node.FS.DirBuildInfo attribute)
(SCons.Node.FS.FileBuildInfo attribute)
(SCons.Node.Python.ValueBuildInfo attribute)
(SCons.SConf.SConfBuildInfo attribute)
bimplicitigs (SCons.Node.Alias.AliasBuildInfo attribute)
(SCons.Node.BuildInfoBase attribute)
(SCons.Node.FS.DirBuildInfo attribute)
(SCons.Node.FS.FileBuildInfo attribute)
(SCons.Node.Python.ValueBuildInfo attribute)
(SCons.SConf.SConfBuildInfo attribute)

binfo (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 (SCons.SConsign.SConsignEntry attribute)
 BoolVariable() (in module SCons.Variables.BoolVariable)
 bsources (SCons.Node.Alias.AliasBuildInfo attribute)
 (SCons.Node.BuildInfoBase attribute)
 (SCons.Node.FS.DirBuildInfo attribute)
 (SCons.Node.FS.FileBuildInfo attribute)
 (SCons.Node.Python.ValueBuildInfo attribute)
 (SCons.SConf.SConfBuildInfo attribute)
 bsourcesigs (SCons.Node.Alias.AliasBuildInfo attribute)
 (SCons.Node.BuildInfoBase attribute)
 (SCons.Node.FS.DirBuildInfo attribute)
 (SCons.Node.FS.FileBuildInfo attribute)
 (SCons.Node.Python.ValueBuildInfo attribute)
 (SCons.SConf.SConfBuildInfo attribute)
 build() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 BuildDefaultGlobals() (in module SCons.Script.SConscript)
 builder (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 Builder() (in module SCons.Builder)

(SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 builder_kw (SCons.Executor.Executor attribute)
 (SCons.Executor.Null attribute)
 builder_set() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 BuilderBase (class in SCons.Builder)
 BuilderDict (class in SCons.Environment)
 BuildError
 BuilderWrapper (class in SCons.Environment)
 BuildInfo (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 BuildInfoBase (class in SCons.Node)
 BuildNodes() (SCons.SConf.SConfBase method)
 BuildProg() (SCons.SConf.CheckContext method)
 BuildTask (class in SCons.Script.Main)
 built() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)

C

cached (SCons.Node.Alias.Alias attribute)

(SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 CacheDebug() (SCons.CacheDir.CacheDir method)
 CacheDir (class in SCons.CacheDir)
 CacheDir() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 cachedir_csig (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 cachepath() (SCons.CacheDir.CacheDir method)
 CachePushFunc() (in module SCons.CacheDir)
 CacheRetrieveFunc() (in module SCons.CacheDir)
 CacheRetrieveString() (in module SCons.CacheDir)
 cachesig (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 CacheVersionWarning
 CacheWriteErrorWarning
 CallableSelector (class in SCons.Builder)
 caller_stack() (in module SCons.Debug)
 caller_trace() (in module SCons.Debug)
 canonical_text() (SCons.Scanner.LaTeX.LaTeX method)
 capitalize() (SCons.Subst.CmdStringHolder method)
 case_sensitive_suffices() (in module SCons.Util)
 casefold() (SCons.Subst.CmdStringHolder method)
 CConditionalScanner() (in module SCons.Scanner.C)
 center() (SCons.Subst.CmdStringHolder method)
 changed() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 changed_content() (SCons.Node.FS.File method)
 changed_since_last_build (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 changed_since_last_build_alias() (in module SCons.Node)
 changed_since_last_build_entry() (in module SCons.Node)
 changed_since_last_build_node() (in module SCons.Node)
 changed_since_last_build_python() (in module SCons.Node)
 changed_since_last_build_state_changed() (in module SCons.Node)
 changed_state() (SCons.Node.FS.File method)
 changed_timestamp_match() (SCons.Node.FS.File method)
 changed_timestamp_newer() (SCons.Node.FS.File method)
 changed_timestamp_then_content() (SCons.Node.FS.File method)
 characters_written (SCons.Errors.MSVCErrors attribute)
 (SCons.Util.PlainWindowsError attribute)
 chdir() (SCons.Node.FS.FS method)
 CHECK_METHODS (SCons.Script.SConsOptions.SConsOption attribute)
 check_value() (SCons.Script.SConsOptions.SConsOption method)
 check_values() (SCons.Script.SConsOptions.SConsOptionParser method)
 CheckBuilder() (in module SCons.Conftest)
 CheckCC() (in module SCons.Conftest)
 (in module SCons.SConf)
 CheckCHheader() (in module SCons.SConf)
 CheckContext (class in SCons.SConf)
 CheckCXX() (in module SCons.Conftest)

(in module SCons.SConf)

CheckCXXHeader() (in module SCons.SConf)

CheckDeclaration() (in module SCons.Conftest)
(in module SCons.SConf)

CheckFunc() (in module SCons.Conftest)
(in module SCons.SConf)

CheckHeader() (in module SCons.Conftest)
(in module SCons.SConf)

CheckLib() (in module SCons.Conftest)
(in module SCons.SConf)

CheckLibWithHeader() (in module SCons.SConf)

CheckProg() (in module SCons.Conftest)
(in module SCons.SConf)

CheckSHCC() (in module SCons.Conftest)
(in module SCons.SConf)

CheckSHCXX() (in module SCons.Conftest)
(in module SCons.SConf)

CheckType() (in module SCons.Conftest)
(in module SCons.SConf)

CheckTypeSize() (in module SCons.Conftest)
(in module SCons.SConf)

children() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)

children_are_up_to_date() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)

chmod() (SCons.Node.FS.FS method)
(SCons.Node.FS.LocalFS method)

chmod_func() (in module SCons.Defaults)

chmod_strfunc() (in module SCons.Defaults)

Classic (class in SCons.Scanner)

ClassicCPP (class in SCons.Scanner)

classname() (in module SCons.Node)

Clean() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Script.SConsScript.SConsEnvironment method)

CleanTask (class in SCons.Script.Main)

cleanup() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
(SCons.Job.ThreadPool method)
(SCons.Taskmaster.Taskmaster method)

Cleanup_CPP_Expressions() (in module SCons.cpp)

clear() (SCons.Builder.CallableSelector method)
(SCons.Builder.DictCmdGenerator method)
(SCons.Builder.DictEmitter method)
(SCons.Builder.ListEmitter method)
(SCons.Builder.OverrideWarner method)
(SCons.Environment.BuilderDict method)
(SCons.Executor.TSList method)
(SCons.Node.Alias.Alias method)
(SCons.Node.Alias.AliasNameSpace method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.NodeList method)
(SCons.Node.Python.Value method)
(SCons.Script.TargetList method)
(SCons.Subst.ListSubber method)
(SCons.Subst.Targets_or_Sources method)
(SCons.Util.CLVar method)
(SCons.Util.NodeList method)
(SCons.Util.Selector method)
(SCons.Util.UniqueList method)

clear_memoized_values() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 Clone() (SCons.Environment.Base method)
 clone() (SCons.Environment.BuilderWrapper method)
 (SCons.Environment.MethodWrapper method)
 Clone() (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 close() (SCons.dblite.dblite method)
 close_strip() (SCons.Subst.ListSubber method)
 CLVar (class in SCons.Util)
 cmdloop()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 CmdStringHolder (class in SCons.Subst)
 cmp() (in module SCons.Util)
 collect_node_states() (SCons.SConf.SConfBuildTask method)
 columnize()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 command (SCons.Errors.BuildError attribute)
 Command() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 CommandAction (class in SCons.Action)
 CommandGeneratorAction (class in SCons.Action)
 CompileProg() (SCons.SConf.CheckContext method)
 CompileSharedObject() (SCons.SConf.CheckContext method)
 complete()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 complete_help()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 completedefault()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 completenames()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 CompositeBuilder (class in SCons.Builder)

compute_exports() (in module SCons.Script.SConscript)
 Configure() (in module SCons.Script.SConscript)
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 ConfigureCacheError
 ConfigureDryRunError
 CONST_ACTIONS
 (SCons.Script.SConsOptions.SConsOption attribute)
 containsAll() (in module SCons.Util)
 containsAny() (in module SCons.Util)
 containsOnly() (in module SCons.Util)
 contentsig (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 convert() (SCons.Node.Alias.Alias method)
 (SCons.Node.Alias.AliasNodeInfo method)
 (SCons.Node.FS.DirNodeInfo method)
 (SCons.Node.FS.FileNodeInfo method)
 (SCons.Node.NodeInfoBase method)
 (SCons.Node.Python.ValueNodeInfo method)
 convert_copy_attrs (SCons.Node.FS.File attribute)
 convert_from_sconsign() (SCons.Node.FS.FileBuildInfo method)
 (SCons.SConf.SConfBuildInfo method)
 (SCons.SConsign.SConsignEntry method)
 convert_old_entry() (SCons.Node.FS.File method)
 convert_sig_attrs (SCons.Node.FS.File attribute)
 convert_to_BuildError() (in module SCons.Errors)
 convert_to_sconsign() (SCons.Node.FS.FileBuildInfo method)
 (SCons.SConf.SConfBuildInfo method)
 (SCons.SConsign.SConsignEntry method)
 convert_value()
 (SCons.Script.SConsOptions.SConsOption method)
 copy() (SCons.Builder.CallableSelector method)
 (SCons.Builder.DictCmdGenerator method)
 (SCons.Builder.DictEmitter method)
 (SCons.Builder.ListEmitter method)
 (SCons.Builder.OverrideWarner method)

(SCons.Environment.BuilderDict method)
 (SCons.Executor.TSList method)
 (SCons.Node.Alias.AliasNameSpace method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 (SCons.Node.NodeList method)
 (SCons.Script.TargetList method)
 (SCons.Subst.ListSubber method)
 (SCons.Subst.Targets_or_Sources method)
 (SCons.Util.CLVar method)
 (SCons.Util.NodeList method)
 (SCons.Util.Selector method)
 (SCons.Util.UniqueList method)
 copy2() (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 copy_func() (in module SCons.Defaults)
 copy_non_reserved_keywords() (in module SCons.Environment)
 corrupt_dblite_warning() (in module SCons.SConsign)
 CorruptSConsignWarning
 count (SCons.Script.Main.Progressor attribute)
 count() (SCons.Builder.ListEmitter method)
 (SCons.Executor.TSList method)
 (SCons.Memoize.CountDict method)
 (SCons.Memoize.CountValue method)
 (SCons.Node.NodeList method)
 (SCons.Script.TargetList method)
 (SCons.Subst.CmdStringHolder method)
 (SCons.Subst.ListSubber method)
 (SCons.Subst.Targets_or_Sources method)
 (SCons.Util.CLVar method)
 (SCons.Util.NodeList method)
 (SCons.Util.UniqueList method)
 CountDict (class in SCons.Memoize)
 CountDictCall() (in module SCons.Memoize)
 Counter (class in SCons.Memoize)
 countLoggedInstances() (in module SCons.Debug)
 CountMethodCall() (in module SCons.Memoize)
 CountStats (class in SCons.Script.Main)
 CountValue (class in SCons.Memoize)
 CPP_to_Python() (in module SCons.cpp)
 CPP_to_Python_Ops_Sub() (in module SCons.cpp)

createCFileBuilders() (in module SCons.Tool)
 CreateConfigHBuilder() (in module SCons.SConf)
 createIncludesFromHeaders() (in module SCons.SConf)
 CreateJarBuilder() (in module SCons.Tool)
 CreateJavaClassDirBuilder() (in module SCons.Tool)
 CreateJavaClassFileBuilder() (in module SCons.Tool)
 CreateJavaFileBuilder() (in module SCons.Tool)
 CreateJavaHBuilder() (in module SCons.Tool)
 CreateLibSymlinks() (in module SCons.Tool)
 createLoadableModuleBuilder() (in module SCons.Tool)
 createObjBuilders() (in module SCons.Tool)
 createProgBuilder() (in module SCons.Tool)
 createSharedLibBuilder() (in module SCons.Tool)
 createStaticLibBuilder() (in module SCons.Tool)
 CScanner() (in module SCons.Scanner.C)
 csig (SCons.Node.Alias.AliasNodeInfo attribute)
 (SCons.Node.FS.FileNodeInfo attribute)
 (SCons.Node.Python.ValueNodeInfo attribute)
 Current (class in SCons.Scanner)
 current_version_id (SCons.Node.Alias.AliasBuildInfo attribute)
 (SCons.Node.Alias.AliasNodeInfo attribute)
 (SCons.Node.BuildInfoBase attribute)
 (SCons.Node.FS.DirBuildInfo attribute)
 (SCons.Node.FS.DirNodeInfo attribute)
 (SCons.Node.FS.FileBuildInfo attribute)
 (SCons.Node.FS.FileNodeInfo attribute)
 (SCons.Node.NodeInfoBase attribute)
 (SCons.Node.Python.ValueBuildInfo attribute)
 (SCons.Node.Python.ValueNodeInfo attribute)
 (SCons.SConf.SConfBuildInfo attribute)
 (SCons.SConsign.SConsignEntry attribute)
 cwd (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)

D

D (class in SCons.Scanner.D)
 daemon() (SCons.Job.Worker property)

DB (class in SCons.SConsign)
 dblite (class in SCons.dblite)
 decide_source() (in module SCons.Node)
 decide_target() (in module SCons.Node)
 Decider() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 (SCons.Script.SConscript.SConsEnvironment method)
 dedent() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)
 default()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 Default() (SCons.Script.SConscript.SConsEnvironment method)
 default_copy_from_cache() (in module SCons.Environment)
 default_decide_source() (in module SCons.Environment)
 default_decide_target() (in module SCons.Environment)
 default_exitstatfunc() (in module SCons.Action)
 DefaultEnvironment() (in module SCons.Defaults)
 DefaultEnvironmentCall (class in SCons.Script.SConscript)
 DefaultToolList() (in module SCons.Platform)
 Define() (SCons.SConf.SConfBase method)
 del_binfo() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 Delegate (class in SCons.Util)
 delete_func() (in module SCons.Defaults)
 delete_strfunc() (in module SCons.Defaults)
 dependency_map (SCons.Node.FS.FileBuildInfo attribute)
 (SCons.SConf.SConfBuildInfo attribute)
 DependencyWarning
 depends (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 Depends() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 depends_set (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 DeprecatedDebugOptionsWarning
 DeprecatedMissingSConscriptWarning
 DeprecatedOptionsWarning
 DeprecatedSourceCodeWarning
 DeprecatedWarning
 destroy()
 (SCons.Script.SConsOptions.SConsOptionGroup method)
 (SCons.Script.SConsOptions.SConsOptionParser method)
 Detect() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 DevelopmentVersionWarning
 DictCmdGenerator (class in SCons.Builder)
 DictEmitter (class in SCons.Builder)

dictify() (in module SCons.Util)

dictify_CPPDEFINES() (in module SCons.Scanner.C)

Dictionary() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Script.SConscript.SConsEnvironment method)

dictSpecialAttrs (SCons.Node.FS.EntryProxy attribute)

Dir (class in SCons.Node.FS)
(class in SCons.SConsign)

dir (SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)

Dir() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.File method)
(SCons.Node.FS.FS method)
(SCons.Node.FS.RootDir method)
(SCons.Script.SConscript.SConsEnvironment method)

Dir.Attrs (class in SCons.Node.FS)

dir_on_disk() (SCons.Node.FS.Dir method)
(SCons.Node.FS.RootDir method)

DirBuildInfo (class in SCons.Node.FS)

DirEntryScanner() (in module SCons.Scanner.Dir)

DirFile (class in SCons.SConsign)

dirname (SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)

DirNodeInfo (class in SCons.Node.FS)

Dirs() (SCons.Node.FS.File method)

DirScanner() (in module SCons.Scanner.Dir)

disable_interspersed_args()
(SCons.Script.SConsOptions.SConsOptionParser method)

disambiguate() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

diskcheck_convert() (in module SCons.Script.SConsOptions)

diskcheck_match() (SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)

diskcheck_types() (in module SCons.Node.FS)

DiskChecker (class in SCons.Node.FS)

display() (SCons.Memoize.CountDict method)
(SCons.Memoize.Counter method)
(SCons.Memoize.CountValue method)

Display() (SCons.SConf.CheckContext method)

display() (SCons.SConf.SConfBuildTask method)
(SCons.Script.Main.BuildTask method)
(SCons.Script.Main.CleanTask method)
(SCons.Script.Main.QuestionTask method)
(SCons.Script.Main.TreePrinter method)
(SCons.Taskmaster.AlwaysTask method)
(SCons.Taskmaster.OutOfDateTask method)
(SCons.Taskmaster.Task method)

display_cached_string()
(SCons.SConf.SConfBuildTask method)

DisplayEngine (class in SCons.Util)

do_append() (SCons.Script.Main.CountStats method)
(SCons.Script.Main.MemStats method)

do_build()
(SCons.Script.Interactive.SConsInteractiveCmd method)

do_clean()
(SCons.Script.Interactive.SConsInteractiveCmd method)

do_define() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_diskcheck_match() (in module SCons.Node.FS)

do_duplicate() (SCons.Node.FS.Dir method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)

do_elif() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_else() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_endif() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_EOF()
(SCons.Script.Interactive.SConsInteractiveCmd method)

do_exit()
(SCons.Script.Interactive.SConsInteractiveCmd method)

do_failed() (SCons.Script.Main.BuildTask method)

do_flatten() (in module SCons.Util)

do_help()
(SCons.Script.Interactive.SConsInteractiveCmd method)

do_if() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_ifdef() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_ifndef() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_import() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_include() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_include_next() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_not_scan() (in module SCons.Scanner.Dir)

do_not_set_entry() (SCons.SConsign.Base method)
(SCons.SConsign.DB method)
(SCons.SConsign.Dir method)
(SCons.SConsign.DirFile method)

do_not_store_info() (SCons.SConsign.Base method)
(SCons.SConsign.DB method)
(SCons.SConsign.Dir method)
(SCons.SConsign.DirFile method)

do_nothing() (in module SCons.Node)
(SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)
(SCons.Script.Main.CountStats method)
(SCons.Script.Main.MemStats method)
(SCons.Script.Main.Stats method)

do_nothing_node() (in module SCons.Node)

do_print() (SCons.Script.Main.CountStats method)
(SCons.Script.Main.MemStats method)

do_shell()
(SCons.Script.Interactive.SConsInteractiveCmd method)

do_undef() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)

do_version()
(SCons.Script.Interactive.SConsInteractiveCmd method)

doc_header
(SCons.Script.Interactive.SConsInteractiveCmd attribute)

doc_leader
 (SCons.Script.Interactive.SConsInteractiveCmd attribute)
 DScanner() (in module SCons.Scanner.D)
 DumbPreProcessor (class in SCons.cpp)
 Dump() (in module SCons.Memoize)
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 dump_caller_counts() (in module SCons.Debug)
 dump_stats() (in module SCons.Taskmaster)
 dumpLoggedInstances() (in module SCons.Debug)
 duplicate (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 DuplicateEnvironmentWarning
E
 EmitLibSymlinks() (in module SCons.Tool)
 EmitterProxy (class in SCons.Builder)
 emptyline()
 (SCons.Script.Interactive.SConsInteractiveCmd method)
 enable() (SCons.Script.Main.CountStats method)
 (SCons.Script.Main.MemStats method)
 (SCons.Script.Main.Stats method)
 enable_interspersed_args()
 (SCons.Script.SConsOptions.SConsOptionParser method)
 EnableMemoization() (in module SCons.Memoize)
 enableWarningClass() (in module SCons.Warnings)
 encode() (SCons.Subst.CmdStringHolder method)
 endswith() (SCons.Subst.CmdStringHolder method)
 ensure_value()
 (SCons.Script.SConsOptions.SConsValues method)
 EnsurePythonVersion()
 (SCons.Script.SConscript.SConsEnvironment method)
 EnsureSConsVersion()
 (SCons.Script.SConscript.SConsEnvironment method)
 entries (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)

 (SCons.Node.FS.RootDir attribute)
 Entry (class in SCons.Node.FS)
 Entry() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.RootDir method)
 (SCons.Script.SConscript.SConsEnvironment method)
 Entry.Attrs (class in SCons.Node.FS)
 entry_abspath() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 entry_exists_on_disk() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 entry_labspath() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 entry_path() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 entry_tpath() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 EntryProxy (class in SCons.Node.FS)
 EntryProxyAttributeError
 EnumVariable() (in module
 SCons.Variables.EnumVariable)
 env (SCons.Executor.Executor attribute)
 (SCons.Executor.Null attribute)
 (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 env_set() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)

(SCons.Node.Python.Value method)
 env_variables (SCons.Scanner.LaTeX.LaTeX attribute)
 Environment() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 erase_previous() (SCons.Script.Main.Progressor method)
 errno (SCons.Errors.MSVCErrors attribute)
 (SCons.Util.PlainWindowsError attribute)
 error()
 (SCons.Script.SConsOptions.SConsOptionParser method)
 errstr (SCons.Errors.BuildError attribute)
 escape() (in module SCons.Platform.posix)
 (in module SCons.Platform.win32)
 (SCons.Subst.CmdStringHolder method)
 (SCons.Subst.Literal method)
 (SCons.Subst.SpecialAttrWrapper method)
 escape_list() (in module SCons.Subst)
 eval_expression() (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)
 exc_clear() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 exc_info (SCons.Errors.BuildError attribute)
 exc_info() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 exception_set() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 Execute() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 execute() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 Execute()
 (SCons.Script.SConscript.SConsEnvironment method)
 execute() (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 execute_action_list() (in module SCons.Executor)
 execute_actions_str() (in module SCons.Executor)
 execute_nothing() (in module SCons.Executor)
 execute_null_str() (in module SCons.Executor)
 executed() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 executed_with_callbacks()
 (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)

executed_without_callbacks() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 Executor (class in SCons.Executor)
 executor (SCons.Errors.BuildError attribute)
 (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 executor_cleanup() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 exists() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 exists_always() (in module SCons.Node)
 exists_base() (in module SCons.Node)
 exists_entry() (in module SCons.Node)
 exists_file() (in module SCons.Node)
 exists_none() (in module SCons.Node)
 Exit() (SCons.Script.SConsScript.SConsEnvironment method)
 exit() (SCons.Script.SConsOptions.SConsOptionParser method)
 exitstatus (SCons.Errors.BuildError attribute)
 expand() (SCons.Subst.ListSubber method)
 (SCons.Subst.StringSubber method)
 expand_default() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)
 expand_prog_name() (SCons.Script.SConsOptions.SConsOptionParser method)
 expanded() (SCons.Subst.ListSubber method)
 expandtabs() (SCons.Subst.CmdStringHolder method)
 explain() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 ExplicitExit
 Export() (SCons.Script.SConsScript.SConsEnvironment method)
 extend() (SCons.Builder.ListEmitter method)
 (SCons.Executor.TSList method)
 (SCons.Node.NodeList method)
 (SCons.Script.TargetList method)
 (SCons.Subst.ListSubber method)
 (SCons.Subst.Targets_or_Sources method)
 (SCons.Util.CLVar method)
 (SCons.Util.NodeList method)
 (SCons.Util.UniqueList method)

F

F90Scanner (class in SCons.Scanner.Fortran)
 fail_continue() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 fail_stop() (SCons.SConf.SConfBuildTask method)

(SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 failed() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 FakeOptionParser (class in SCons.Script.Main)
 FakeOptionParser.FakeOptionValues (class in SCons.Script.Main)
 fetch_win32_parallel_msg() (in module SCons.Script.Main)
 fetchLoggedInstances() (in module SCons.Debug)
 field_list (SCons.Node.Alias.AliasNodeInfo attribute)
 (SCons.Node.FS.FileNodeInfo attribute)
 (SCons.Node.Python.ValueNodeInfo attribute)
 File (class in SCons.Node.FS)
 File() (in module SCons.SConsign)
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.RootDir method)
 (SCons.Script.SConsript.SConsEnvironment method)
 File.Attrs (class in SCons.Node.FS)
 file_on_disk() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 FileBuildInfo (class in SCons.Node.FS)
 FileBuildInfoFileToCsigMappingError
 findir_lookup() (SCons.Node.FS.FileFinder method)
 FileFinder (class in SCons.Node.FS)
 filename (SCons.Errors.BuildError attribute)
 (SCons.Errors.MSVCErr attribute)
 (SCons.Util.PlainWindowsError attribute)
 filename2 (SCons.Errors.MSVCErr attribute)
 (SCons.Util.PlainWindowsError attribute)
 FileNodeInfo (class in SCons.Node.FS)
 finalize_result() (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)
 find() (SCons.Subst.CmdStringHolder method)
 find_cycle() (in module SCons.Taskmaster)
 find_deepest_user_frame() (in module SCons.Script.Main)
 find_file() (in module SCons.Node.FS)
 (SCons.Node.FS.FileFinder method)
 find_include() (SCons.Scanner.Classic method)
 (SCons.Scanner.ClassicCPP method)
 (SCons.Scanner.D.D method)
 (SCons.Scanner.Fortran.F90Scanner method)
 (SCons.Scanner.LaTeX.LaTeX method)
 find_include_file() (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)
 find_include_names() (SCons.Scanner.Classic method)
 (SCons.Scanner.ClassicCPP method)
 (SCons.Scanner.D.D method)
 (SCons.Scanner.Fortran.F90Scanner method)
 find_next_candidate() (SCons.Taskmaster.Taskmaster method)
 find_program_path() (in module SCons.Tool)
 find_repo_file() (SCons.Node.FS.File method)
 find_src_builder() (SCons.Node.FS.File method)
 FindAllTools() (in module SCons.Tool)
 FindENVPPathDirs (class in SCons.Scanner.LaTeX)
 FindFile() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConsript.SConsEnvironment method)
 FindInstalledFiles() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

FindIdxes() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

FindPathDirs (class in SCons.Scanner)

FindSourceFiles() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

FindTool() (in module SCons.Tool)

Finish() (SCons.SConf.SConfBase method)

flatten() (in module SCons.Util)

Flatten() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

flatten_sequence() (in module SCons.Util)

flush() (SCons.SConf.Streamer method)

for_signature() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

(SCons.Subst.Literal method)

(SCons.Subst.SpecialAttrWrapper method)

ForDirectory (in module SCons.SConsign)

format (SCons.Variables.Variables attribute)

format() (SCons.Node.Alias.AliasNodeInfo method)

(SCons.Node.FS.DirNodeInfo method)

(SCons.Node.FS.FileBuildInfo method)

(SCons.Node.FS.FileNodeInfo method)

(SCons.Node.NodeInfoBase method)

(SCons.Node.Python.ValueNodeInfo method)

(SCons.SConf.SConfBuildInfo method)

(SCons.Subst.CmdStringHolder method)

format_ (SCons.Variables.Variables attribute)

format_description() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)

(SCons.Script.SConsOptions.SConsOptionGroup method)

(SCons.Script.SConsOptions.SConsOptionParser method)

format_epilog() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)

(SCons.Script.SConsOptions.SConsOptionParser method)

format_heading() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)

format_help() (SCons.Script.SConsOptions.SConsOptionGroup method)

(SCons.Script.SConsOptions.SConsOptionParser method)

format_map() (SCons.Subst.CmdStringHolder method)

format_option() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)

format_option_help() (SCons.Script.SConsOptions.SConsOptionGroup method)

(SCons.Script.SConsOptions.SConsOptionParser method)

format_option_strings() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)

format_usage() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)

FormatVariableHelpText() (SCons.Variables.Variables method)

FortranCxxMixWarning

FortranScan() (in module SCons.Scanner.Fortran)

Frame (class in SCons.Script.SConscript)

fromkeys() (SCons.Builder.CallableSelector method)

(SCons.Builder.DictCmdGenerator method)

(SCons.Builder.DictEmitter method)

(SCons.Builder.OverrideWarner class method)

(SCons.Environment.BuilderDict class method)

(SCons.Node.Alias.AliasNameSpace class method)

(SCons.Util.Selector method)

FS (class in SCons.Node.FS)

fs (SCons.Node.FS.Base attribute)

(SCons.Node.FS.Dir attribute)

(SCons.Node.FS.DirNodeInfo attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.FileNodeInfo attribute)
(SCons.Node.FS.RootDir attribute)
fs_delete() (SCons.Script.Main.CleanTask method)
func_shorten() (in module SCons.Debug)
function_name() (SCons.Action.FunctionAction method)
FunctionAction (class in SCons.Action)
FunctionEvaluator (class in SCons.cpp)
FutureDeprecatedWarning
FutureReservedVariableWarning

G

generate() (in module SCons.Platform.aix)
(in module SCons.Platform.cygwin)
(in module SCons.Platform.darwin)
(in module SCons.Platform.hpux)
(in module SCons.Platform.irix)
(in module SCons.Platform.os2)
(in module SCons.Platform.posix)
(in module SCons.Platform.sunos)
(in module SCons.Platform.win32)
generate_versioned_lib_info()
(SCons.Tool._LibInfoGeneratorBase method)
(SCons.Tool._LibNameGenerator method)
(SCons.Tool._LibPrefixGenerator method)
(SCons.Tool._LibSonameGenerator method)
(SCons.Tool._LibSuffixGenerator method)
(SCons.Tool._LibSymlinkGenerator method)
GenerateHelpText() (SCons.Variables.Variables method)
genstring() (SCons.Action._ActionAction method)
(SCons.Action.ActionBase method)
(SCons.Action.CommandAction method)
(SCons.Action.CommandGeneratorAction method)
(SCons.Action.FunctionAction method)
(SCons.Action.LazyAction method)
(SCons.Action.ListAction method)
get() (SCons.Builder.CallableSelector method)
(SCons.Builder.CompositeBuilder method)
(SCons.Builder.DictCmdGenerator method)
(SCons.Builder.DictEmitter method)
(SCons.Builder.OverrideWarner method)
(SCons.Environment.Base method)

(SCons.Environment.BuilderDict method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Environment.SubstitutionEnvironment method)
(SCons.Job.ThreadPool method)
(SCons.Node.Alias.AliasNameSpace method)
(SCons.Node.FS.EntryProxy method)
(SCons.Script.SConsScript.SConsEnvironment method)
(SCons.Util.Proxy method)
(SCons.Util.Selector method)
get_abspath() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
get_action_list() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
get_action_side_effects() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
get_action_targets() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
get_all_children() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
(SCons.Script.Main.TreePrinter method)
get_all_prerequisites() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
get_all_rdirs() (SCons.Node.FS.Dir method)
(SCons.Node.FS.RootDir method)
get_all_sources() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
get_all_targets() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
get_architecture() (in module SCons.Platform.win32)
get_binfo() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

get_build_env() (SCons.Executor.Executor method)

(SCons.Executor.Null method)

(SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

get_build_scanner_path() (SCons.Executor.Executor method)

(SCons.Executor.Null method)

(SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

get_builder() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

(SCons.Script.SConscript.SConsEnvironment method)

(SCons.Tool.ToolInitializerMethod method)

get_CacheDir() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Executor.NullEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

get_cachedir_bsig() (SCons.Node.FS.File method)

get_cachedir_csig() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

get_calling_namespaces() (in module SCons.Script.SConscript)

get_children() (in module SCons.Node)

get_content_hash() (SCons.Node.FS.File method)

get_contents() (SCons.Action._ActionAction method)

(SCons.Action.ActionBase method)

(SCons.Action.ActionCaller method)

(SCons.Action.CommandAction method)

(SCons.Action.CommandGeneratorAction method)

(SCons.Action.FunctionAction method)

(SCons.Action.LazyAction method)

(SCons.Action.ListAction method)

(SCons.Executor.Executor method)

(SCons.Executor.Null method)

(SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

get_contents_dir() (in module SCons.Node)

get_contents_entry() (in module SCons.Node)

get_contents_file() (in module SCons.Node)

get_contents_none() (in module SCons.Node)

get_contents_sig() (SCons.Node.FS.File method)

get_csig() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

Get_DataBase() (in module SCons.SConsign)

get_default_ENV() (in module SCons.Action)

get_default_fs() (in module SCons.Node.FS)

get_default_values()
(SCons.Script.SConsOptions.SConsOptionParser method)

get_DefaultEnvironmentProxy() (in module SCons.Script.SConscript)

get_derived_children() (SCons.Script.Main.TreePrinter method)

get_description()
(SCons.Script.SConsOptions.SConsOptionGroup method)
(SCons.Script.SConsOptions.SConsOptionParser method)

get_dir() (SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)

get_entry() (SCons.SConsign.Base method)
(SCons.SConsign.DB method)
(SCons.SConsign.Dir method)
(SCons.SConsign.DirFile method)

get_env() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)

get_env_bool() (in module SCons.Util)

get_env_scanner() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)

get_environment_var() (in module SCons.Util)

get_executor() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)

get_factory() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Script.SConscript.SConsEnvironment method)

get_found_includes() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)

get_implicit_deps() (SCons.Action.CommandAction method)
(SCons.Action.CommandGeneratorAction method)
(SCons.Action.FunctionAction method)
(SCons.Action.LazyAction method)
(SCons.Action.ListAction method)
(SCons.Executor.Executor method)
(SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)

get_internal_path() (SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)

get_kw() (SCons.Executor.Executor method)

get_presig() (SCons.Action.CommandAction method)	(SCons.Node.FS.Entry method)
(SCons.Action.CommandGeneratorAction method)	(SCons.Node.FS.File method)
(SCons.Action.FunctionAction method)	(SCons.Node.FS.RootDir method)
(SCons.Action.LazyAction method)	(SCons.Node.Node method)
(SCons.Action.ListAction method)	(SCons.Node.Python.Value method)
get_prog_name() (SCons.Script.SConsOptions.SConsOptionParser method)	get_stored_implicit() (SCons.Node.Alias.Alias method)
	(SCons.Node.FS.Base method)
get_program_files_dir() (in module SCons.Platform.win32)	(SCons.Node.FS.Dir method)
get_root() (SCons.Node.FS.FS method)	(SCons.Node.FS.Entry method)
get_scanner() (SCons.Environment.Base method)	(SCons.Node.FS.File method)
(SCons.Environment.OverrideEnvironment method)	(SCons.Node.FS.RootDir method)
(SCons.Script.SConscript.SConsEnvironment method)	(SCons.Node.Node method)
	(SCons.Node.Python.Value method)
get_size() (SCons.Node.FS.File method)	get_stored_info() (SCons.Node.Alias.Alias method)
get_keys() (SCons.Scanner.Base method)	(SCons.Node.FS.Base method)
(SCons.Scanner.Classic method)	(SCons.Node.FS.Dir method)
(SCons.Scanner.ClassicCPP method)	(SCons.Node.FS.Entry method)
(SCons.Scanner.Current method)	(SCons.Node.FS.File method)
(SCons.Scanner.D.D method)	(SCons.Node.FS.RootDir method)
(SCons.Scanner.Fortran.F90Scanner method)	(SCons.Node.Node method)
(SCons.Scanner.LaTeX.LaTeX method)	(SCons.Node.Python.Value method)
(SCons.Scanner.Selector method)	get_string() (SCons.Node.Alias.Alias method)
get_source_scanner() (SCons.Node.Alias.Alias method)	(SCons.Node.FS.Base method)
(SCons.Node.FS.Base method)	(SCons.Node.FS.Dir method)
(SCons.Node.FS.Dir method)	(SCons.Node.FS.Entry method)
(SCons.Node.FS.Entry method)	(SCons.Node.FS.File method)
(SCons.Node.FS.File method)	(SCons.Node.FS.RootDir method)
(SCons.Node.FS.RootDir method)	(SCons.Node.Node method)
(SCons.Node.Node method)	(SCons.Node.Python.Value method)
(SCons.Node.Python.Value method)	get_subst_proxy() (SCons.Node.Alias.Alias method)
get_sources() (SCons.Executor.Executor method)	(SCons.Node.FS.Base method)
get_src_builders() (SCons.Builder.BuilderBase method)	(SCons.Node.FS.Dir method)
get_src_sig_type() (SCons.Environment.Base method)	(SCons.Node.FS.Entry method)
(SCons.Environment.OverrideEnvironment method)	(SCons.Node.FS.File method)
(SCons.Script.SConscript.SConsEnvironment method)	(SCons.Node.FS.RootDir method)
	(SCons.Node.Node method)
	(SCons.Node.Python.Value method)
get_src_suffix() (SCons.Builder.BuilderBase method)	get_suffix() (SCons.Builder.BuilderBase method)
get_state() (SCons.Node.Alias.Alias method)	(SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)	(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)	(SCons.Node.FS.Dir method)
	(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

get_system_root() (in module SCons.Platform.win32)

get_target() (SCons.SConf.SConfBuildTask method)

(SCons.Script.Main.BuildTask method)

(SCons.Script.Main.CleanTask method)

(SCons.Script.Main.QuestionTask method)

(SCons.Taskmaster.AlwaysTask method)

(SCons.Taskmaster.OutOfDateTask method)

(SCons.Taskmaster.Task method)

get_target_scanner() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

get_targets() (SCons.Action._ActionAction method)

(SCons.Action.ActionBase method)

(SCons.Action.CommandAction method)

(SCons.Action.CommandGeneratorAction method)

(SCons.Action.FunctionAction method)

(SCons.Action.LazyAction method)

(SCons.Action.ListAction method)

get_text_contents() (SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Python.Value method)

get_tgt_sig_type() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

get_timestamp() (SCons.Executor.Executor method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

get_tpath() (SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

get_unignored_sources() (SCons.Executor.Executor method)

(SCons.Executor.Null method)

get_usage() (SCons.Script.SConsOptions.SConsOptionParser method)

get_varlist() (SCons.Action._ActionAction method)

(SCons.Action.ActionBase method)

(SCons.Action.CommandAction method)

(SCons.Action.CommandGeneratorAction method)

(SCons.Action.FunctionAction method)

(SCons.Action.LazyAction method)

(SCons.Action.ListAction method)

get_version() (SCons.Script.SConsOptions.SConsOptionParser method)

get_versioned_lib_info_generator() (SCons.Tool._LibInfoGeneratorBase method)

(SCons.Tool._LibNameGenerator method)

(SCons.Tool._LibPrefixGenerator method)

(SCons.Tool._LibSonameGenerator method)

(SCons.Tool._LibSuffixGenerator method)

(SCons.Tool._LibSymlinkGenerator method)

get_xlc() (in module SCons.Platform.aix)

GetBatchExecutor() (in module SCons.Executor)

GetBuildFailures() (in module SCons.Script.Main)

GetBuildPath() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

getcwd() (SCons.Node.FS.FS method)

GetLaunchDir() (SCons.Script.SConscript.SConsEnvironment method)

getmtime() (SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.FS method)

(SCons.Node.FS.LocalFS method)

(SCons.Node.FS.RootDir method)

getName() (SCons.Job.Worker method)
GetOption() (in module SCons.Script.Main)
(SCons.Script.SConscript.SConsEnvironment method)
getRepositories() (SCons.Node.FS.Dir method)
(SCons.Node.FS.RootDir method)
getsize() (SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.FS method)
(SCons.Node.FS.LocalFS method)
(SCons.Node.FS.RootDir method)
GetTag() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
getvalue() (SCons.SConf.Streamer method)
Glob() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
glob() (SCons.Node.FS.Dir method)
Glob() (SCons.Node.FS.FS method)
glob() (SCons.Node.FS.RootDir method)
Glob() (SCons.Script.SConscript.SConsEnvironment method)
gvars() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Environment.SubstitutionEnvironment method)
(SCons.Script.SConscript.SConsEnvironment method)

H

handle_missing_SConscript() (in module SCons.Script.SConscript)
has_builder() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
has_explicit_builder() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
has_glob_magic() (in module SCons.Node.FS)
has_key() (SCons.dblite.dblite method)
(SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Environment.SubstitutionEnvironment method)
(SCons.Script.SConscript.SConsEnvironment method)
has_option()
(SCons.Script.SConsOptions.SConsOptionGroup method)
(SCons.Script.SConsOptions.SConsOptionParser method)
has_src_builder() (SCons.Node.FS.File method)
Help() (SCons.Script.SConscript.SConsEnvironment method)
HelpFunction() (in module SCons.Script)
hit_ratio() (SCons.CacheDir.CacheDir property)

I

ident() (SCons.Job.Worker property)
identchars
(SCons.Script.Interactive.SConsInteractiveCmd attribute)
IDLScan() (in module SCons.Scanner.IDL)
IDX() (in module SCons.Util)
ignore (SCons.Node.Alias.Alias attribute)
(SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)	(SCons.Node.FS.RootDir attribute)
(SCons.Node.Node attribute)	(SCons.Node.Node attribute)
(SCons.Node.Python.Value attribute)	(SCons.Node.Python.Value attribute)
Ignore() (SCons.Environment.Base method)	indent() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)
(SCons.Environment.OverrideEnvironment method)	index() (SCons.Builder.ListEmitter method)
(SCons.Script.SConscript.SConsEnvironment method)	(SCons.Executor.TSList method)
ignore_cycle() (in module SCons.Node)	(SCons.Node.NodeList method)
ignore_diskcheck_match() (in module SCons.Node.FS)	(SCons.Script.TargetList method)
ignore_set (SCons.Node.Alias.Alias attribute)	(SCons.Subst.CmdStringHolder method)
(SCons.Node.FS.Base attribute)	(SCons.Subst.ListSubber method)
(SCons.Node.FS.Dir attribute)	(SCons.Subst.Targets_or_Sources method)
(SCons.Node.FS.Entry attribute)	(SCons.Util.CLVar method)
(SCons.Node.FS.File attribute)	(SCons.Util.NodeList method)
(SCons.Node.FS.RootDir attribute)	(SCons.Util.UniqueList method)
(SCons.Node.Node attribute)	initialize_do_splitdrive() (in module SCons.Node.FS)
(SCons.Node.Python.Value attribute)	initialize_result() (SCons.cpp.DumbPreProcessor method)
implicit (SCons.Node.Alias.Alias attribute)	(SCons.cpp.PreProcessor method)
(SCons.Node.FS.Base attribute)	(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Node.FS.Dir attribute)	(SCons.Scanner.C.SConsCPPScanner method)
(SCons.Node.FS.Entry attribute)	Initializers() (in module SCons.Tool)
(SCons.Node.FS.File attribute)	insert() (SCons.Builder.ListEmitter method)
(SCons.Node.FS.RootDir attribute)	(SCons.Executor.TSList method)
(SCons.Node.Node attribute)	(SCons.Node.NodeList method)
(SCons.Node.Python.Value attribute)	(SCons.Script.TargetList method)
implicit_set (SCons.Node.Alias.Alias attribute)	(SCons.Subst.ListSubber method)
(SCons.Node.FS.Base attribute)	(SCons.Subst.Targets_or_Sources method)
(SCons.Node.FS.Dir attribute)	(SCons.Util.CLVar method)
(SCons.Node.FS.Entry attribute)	(SCons.Util.NodeList method)
(SCons.Node.FS.File attribute)	(SCons.Util.UniqueList method)
(SCons.Node.FS.RootDir attribute)	instance (SCons.Variables.Variables attribute)
(SCons.Node.Node attribute)	interact() (in module SCons.Script.Interactive)
(SCons.Node.Python.Value attribute)	InternalError
Import() (SCons.Script.SConscript.SConsEnvironment method)	InterruptState (class in SCons.Job)
ImportVirtualenv() (in module SCons.Platform.virtualenv)	intro (SCons.Script.Interactive.SConsInteractiveCmd attribute)
includes (SCons.Node.Alias.Alias attribute)	invalidate_node_memos() (in module SCons.Node.FS)
(SCons.Node.FS.Base attribute)	is_a_Builder() (in module SCons.Builder)
(SCons.Node.FS.Dir attribute)	is_alive() (SCons.Job.Worker method)
(SCons.Node.FS.Entry attribute)	is_derived() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.File attribute)	(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 is_derived_node() (in module SCons.Node)
 is_derived_none() (in module SCons.Node)
 is_Dict() (in module SCons.Util)
 is_done() (SCons.Node.Walker method)
 is_enabled() (SCons.CacheDir.CacheDir method)
 is_explicit (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 is_List() (in module SCons.Util)
 is_literal() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 (SCons.Subst.CmdStringHolder method)
 (SCons.Subst.Literal method)
 (SCons.Subst.SpecialAttrWrapper method)
 is_readonly() (SCons.CacheDir.CacheDir method)
 is_Scalar() (in module SCons.Util)
 is_sconscript() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 is_Sequence() (in module SCons.Util)
 is_String() (in module SCons.Util)
 is_Tuple() (in module SCons.Util)
 is_under() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Python.Value method)
 is_up_to_date() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 is_valid_construction_var() (in module SCons.Environment)
 isAlive() (SCons.Job.Worker method)
 isalnum() (SCons.Subst.CmdStringHolder method)
 isalpha() (SCons.Subst.CmdStringHolder method)
 isascii() (SCons.Subst.CmdStringHolder method)
 isDaemon() (SCons.Job.Worker method)
 isdecimal() (SCons.Subst.CmdStringHolder method)
 isdigit() (SCons.Subst.CmdStringHolder method)
 isdir() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 (SCons.Node.FS.RootDir method)
 isfile() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 (SCons.Node.FS.RootDir method)
 isidentifier() (SCons.Subst.CmdStringHolder method)
 IsInVirtualenv() (in module SCons.Platform.virtualenv)

islink() (SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.FS method)
(SCons.Node.FS.LocalFS method)
(SCons.Node.FS.RootDir method)
islower() (SCons.Subst.CmdStringHolder method)
isnumeric() (SCons.Subst.CmdStringHolder method)
isprintable() (SCons.Subst.CmdStringHolder method)
isspace() (SCons.Subst.CmdStringHolder method)
istitle() (SCons.Subst.CmdStringHolder method)
isupper() (SCons.Subst.CmdStringHolder method)
items() (SCons.Builder.CallableSelector method)
(SCons.Builder.DictCmdGenerator method)
(SCons.Builder.DictEmitter method)
(SCons.Builder.OverrideWarner method)
(SCons.Environment.Base method)
(SCons.Environment.BuilderDict method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Environment.SubstitutionEnvironment method)
(SCons.Node.Alias.AliasNameSpace method)
(SCons.Script.SConscript.SConsEnvironment method)
(SCons.Util.Selector method)
iterkeys() (SCons dblite.dblite method)

J

Jobs (class in SCons.Job)
join() (SCons.Job.Worker method)
(SCons.Subst.CmdStringHolder method)

K

key() (SCons.Memoize.CountDict method)
(SCons.Memoize.Counter method)
(SCons.Memoize.CountValue method)
keys() (SCons.Builder.CallableSelector method)
(SCons.Builder.DictCmdGenerator method)
(SCons.Builder.DictEmitter method)
(SCons.Builder.OverrideWarner method)
(SCons.dblite.dblite method)

(SCons.Environment.Base method)
(SCons.Environment.BuilderDict method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Environment.SubstitutionEnvironment method)
(SCons.Node.Alias.AliasNameSpace method)
(SCons.Script.SConscript.SConsEnvironment method)
(SCons.Util.Selector method)
(SCons.Variables.Variables method)
keyword_paths (SCons.Scanner.LaTeX.LaTeX attribute)

L

lastcmd
(SCons.Script.Interactive.SConsInteractiveCmd attribute)
LaTeX (class in SCons.Scanner.LaTeX)
LaTeXScanner() (in module SCons.Scanner.LaTeX)
LazyAction (class in SCons.Action)
LibSymlinksActionFunction() (in module SCons.Tool)
LibSymlinksStrFun() (in module SCons.Tool)
libtype() (SCons.Tool._ImpLibInfoSupport property)
(SCons.Tool._LdModInfoSupport property)
(SCons.Tool._LibInfoGeneratorBase property)
(SCons.Tool._LibNameGenerator property)
(SCons.Tool._LibPrefixGenerator property)
(SCons.Tool._LibSonameGenerator property)
(SCons.Tool._LibSuffixGenerator property)
(SCons.Tool._LibSymlinkGenerator property)
(SCons.Tool._ShLibInfoSupport property)
link() (SCons.Node.FS.Dir method)
(SCons.Node.FS.FS method)
(SCons.Node.FS.LocalFS method)
(SCons.Node.FS.RootDir method)
linked (SCons.Node.Alias.Alias attribute)
(SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)
(SCons.Node.Node attribute)
(SCons.Node.Python.Value attribute)

LinkFunc() (in module SCons.Node.FS)
 LinkWarning
 ListAction (class in SCons.Action)
 listdir() (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 ListEmitter (class in SCons.Builder)
 listLoggedInstances() (in module SCons.Debug)
 ListSubber (class in SCons.Subst)
 ListVariable() (in module SCons.Variables.ListVariable)
 Literal (class in SCons.Subst)
 Literal() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 literal() (SCons.Subst.ListSubber method)
 ljust() (SCons.Subst.CmdStringHolder method)
 Local() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 LocalFS (class in SCons.Node.FS)
 LocalString() (in module SCons.Node.FS)
 Log() (SCons.SConf.CheckContext method)
 logical_lines() (in module SCons.Util)
 LogicalLines (class in SCons.Util)
 logInstanceCreation() (in module SCons.Debug)
 lookup() (SCons.Node.Alias.AliasNameSpace method)
 lower() (SCons.Subst.CmdStringHolder method)
 lstat() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 (SCons.Node.FS.RootDir method)
 lstrip() (SCons.Subst.CmdStringHolder method)
 lvars (SCons.Executor.Executor attribute)
 (SCons.Executor.Null attribute)
 lvars() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)

(SCons.Environment.SubstitutionEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)

M

main() (in module SCons.Script.Main)
 make_path_relative() (in module SCons.Util)
 make_ready() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 make_ready_all() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 make_ready_current() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 makedirs() (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 maketrans() (SCons.Subst.CmdStringHolder method)
 MandatoryDeprecatedWarning

match_splitext() (in module SCons.Builder)
 md5_chunksize (SCons.Node.FS.File attribute)
 MD5collect() (in module SCons.Util)
 MD5filesignature() (in module SCons.Util)
 MD5signature() (in module SCons.Util)
 memory() (in module SCons.Debug)
 MemStats (class in SCons.Script.Main)
 merge() (SCons.Node.Alias.AliasBuildInfo method)
 (SCons.Node.Alias.AliasNodeInfo method)
 (SCons.Node.BuildInfoBase method)
 (SCons.Node.FS.DirBuildInfo method)
 (SCons.Node.FS.DirNodeInfo method)
 (SCons.Node.FS.FileBuildInfo method)
 (SCons.Node.FS.FileNodeInfo method)
 (SCons.Node.NodeInfoBase method)
 (SCons.Node.Python.ValueBuildInfo method)
 (SCons.Node.Python.ValueNodeInfo method)
 (SCons.SConf.SConfBuildInfo method)
 (SCons.SConsign.Base method)
 (SCons.SConsign.DB method)
 (SCons.SConsign.Dir method)
 (SCons.SConsign.DirFile method)
 MergeFlags() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 Message() (SCons.SConf.CheckContext method)
 MethodWrapper (class in SCons.Environment)
 misc_header
 (SCons.Script.Interactive.SConsInteractiveCmd attribute)
 MisleadingKeywordsWarning
 misses() (SCons.CacheDir.CacheDir property)
 missing() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 MissingSConscriptWarning
 mkdir() (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 mkdir_func() (in module SCons.Defaults)
 MkdirFunc() (in module SCons.Node.FS)
 modify_env_var() (in module SCons.Scanner.LaTeX)
 move_func() (in module SCons.Defaults)
 move_to_end() (SCons.Builder.CallableSelector method)
 (SCons.Builder.DictCmdGenerator method)
 (SCons.Builder.DictEmitter method)
 (SCons.Util.Selector method)
 mro() (SCons.compat.NoSlotsPyPy method)
 MSVCErrors
 multiple_side_effect_has_builder()
 (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 must_be_same() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)

N

name (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 name() (SCons.Job.Worker property)
 NeedConfigHBuilder() (in module SCons.SConf)
 needs_execute() (SCons.SConf.SConfBuildTask method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)

(SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 needs_normpath_match() (in module SCons.Node.FS)
 new_binfo() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 new_ninfo() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 next_line() (SCons.Subst.ListSubber method)
 next_task() (SCons.Taskmaster.Taskmaster method)
 next_word() (SCons.Subst.ListSubber method)
 ninfo (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 (SCons.SConsign.SConsignEntry attribute)
 NLWrapper (class in SCons.Subst)
 no_batch_key() (SCons.Action._ActionAction method)
 (SCons.Action.ActionBase method)
 (SCons.Action.CommandAction method)
 (SCons.Action.CommandGeneratorAction method)
 (SCons.Action.FunctionAction method)
 (SCons.Action.LazyAction method)
 (SCons.Action.ListAction method)
 NO_DEFAULT_VALUE (SCons.Script.SConsOptions.S
 ConsIndentedHelpFormatter attribute)
 no_next_candidate() (SCons.Taskmaster.Taskmaster
 method)
 no_tlb() (in module SCons.Scanner.RC)
 nocache (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 NoCache() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConscript.SConsEnvironment
 method)
 noclean (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 NoClean() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConscript.SConsEnvironment
 method)
 Node (class in SCons.Node)
 node (SCons.Errors.BuildError attribute)
 Node.Attrs (class in SCons.Node)
 node_conv() (in module SCons.PathList)
 NodeInfo (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 NodeInfoBase (class in SCons.Node)
 NodeList (class in SCons.Node)
 (class in SCons.Util)
 nohelp (SCons.Script.Interactive.SConsInteractiveCmd
 attribute)

NoObjectCountWarning
NoParallelSupportWarning
NoSlotsPyPy (class in SCons.compat)
NoSubstitutionProxy() (in module SCons.Environment)
Null (class in SCons.Executor)
 (class in SCons.Util)
NullCmdGenerator (class in SCons.Defaults)
NullEnvironment (class in SCons.Executor)
nullify() (SCons.Executor.Executor method)
NullNodeList (class in SCons.Subst)
NullNodesList (in module SCons.Subst)
NullSeq (class in SCons.Util)

O

on_disk_entries (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
onecmd()
(SCons.Script.Interactive.SConsInteractiveCmd
method)
only_dirs() (in module SCons.Scanner.Dir)
open() (in module SCons.dblite)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
open_strip() (SCons.Subst.ListSubber method)
OutOfDateTask (class in SCons.Taskmaster)
Override() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
method)
 (SCons.Environment.SubstitutionEnvironment
method)
 (SCons.Script.SConscript.SConsEnvironment
method)
OverrideEnvironment (class in SCons.Environment)
overridelist (SCons.Executor.Executor attribute)
 (SCons.Executor.Null attribute)
OverrideWarner (class in SCons.Builder)

P

PackageVariable() (in module
SCons.Variables.PackageVariable)
Parallel (class in SCons.Job)

parse_args()
(SCons.Script.SConsOptions.SConsOptionParser
method)
ParseConfig() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
method)
 (SCons.Script.SConscript.SConsEnvironment
method)
ParseDepends() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
method)
 (SCons.Script.SConscript.SConsEnvironment
method)
ParseFlags() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
method)
 (SCons.Environment.SubstitutionEnvironment
method)
 (SCons.Script.SConscript.SConsEnvironment
method)
parseline()
(SCons.Script.Interactive.SConsInteractiveCmd
method)
Parser() (in module SCons.Script.SConsOptions)
partition() (SCons.Subst.CmdStringHolder method)
path (SCons.Node.FS.RootDir attribute)
path() (SCons.Scanner.Base method)
 (SCons.Scanner.Classic method)
 (SCons.Scanner.ClassicCPP method)
 (SCons.Scanner.Current method)
 (SCons.Scanner.D.D method)
 (SCons.Scanner.Fortran.F90Scanner method)
 (SCons.Scanner.LaTeX.LaTeX method)
 (SCons.Scanner.Selector method)
path_string() (in module SCons.Script.Main)
PathList() (in module SCons.PathList)
PDFLaTeXScanner() (in module
SCons.Scanner.LaTeX)
piped_env_spawn() (in module SCons.Platform.posix)
piped_spawn() (in module SCons.Platform.win32)
PlainWindowsError
Platform() (in module SCons.Platform)
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
method)
 (SCons.Script.SConscript.SConsEnvironment
method)

platform_default() (in module SCons.Platform)
platform_module() (in module SCons.Platform)
PlatformSpec (class in SCons.Platform)
pop() (SCons.Builder.CallableSelector method)
(SCons.Builder.DictCmdGenerator method)
(SCons.Builder.DictEmitter method)
(SCons.Builder.ListEmitter method)
(SCons.Builder.OverrideWarner method)
(SCons.Environment.BuilderDict method)
(SCons.Executor.TSList method)
(SCons.Node.Alias.AliasNameSpace method)
(SCons.Node.NodeList method)
(SCons.Script.TargetList method)
(SCons.Subst.ListSubber method)
(SCons.Subst.Targets_or_Sources method)
(SCons.Util.CLVar method)
(SCons.Util.NodeList method)
(SCons.Util.Selector method)
(SCons.Util.UniqueList method)
popitem() (SCons.Builder.CallableSelector method)
(SCons.Builder.DictCmdGenerator method)
(SCons.Builder.DictEmitter method)
(SCons.Builder.OverrideWarner method)
(SCons.Environment.BuilderDict method)
(SCons.Node.Alias.AliasNameSpace method)
(SCons.Util.Selector method)
post_actions (SCons.Executor.Executor attribute)
(SCons.Executor.Null attribute)
postcmd()
(SCons.Script.Interactive.SConsInteractiveCmd
method)
postloop()
(SCons.Script.Interactive.SConsInteractiveCmd
method)
postprocess() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
(SCons.SConf.SConfBuildTask method)
(SCons.Script.Main.BuildTask method)
(SCons.Script.Main.CleanTask method)
(SCons.Script.Main.QuestionTask method)
(SCons.Taskmaster.AlwaysTask method)
(SCons.Taskmaster.OutOfDateTask method)

(SCons.Script.Main.BuildTask method)
(SCons.Script.Main.CleanTask method)
(SCons.Script.Main.QuestionTask method)
(SCons.Taskmaster.AlwaysTask method)
(SCons.Taskmaster.OutOfDateTask method)
(SCons.Taskmaster.Task method)
pre_actions (SCons.Executor.Executor attribute)
(SCons.Executor.Null attribute)
precious (SCons.Node.Alias.Alias attribute)
(SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)
(SCons.Node.Node attribute)
(SCons.Node.Python.Value attribute)
Precious() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment
method)
(SCons.Script.SConscript.SConsEnvironment
method)
precmd()
(SCons.Script.Interactive.SConsInteractiveCmd
method)
preloop()
(SCons.Script.Interactive.SConsInteractiveCmd
method)
preparation_failed() (SCons.Job.ThreadPool method)
prepare() (SCons.Executor.Executor method)
(SCons.Executor.Null method)
(SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
(SCons.SConf.SConfBuildTask method)
(SCons.Script.Main.BuildTask method)
(SCons.Script.Main.CleanTask method)
(SCons.Script.Main.QuestionTask method)
(SCons.Taskmaster.AlwaysTask method)
(SCons.Taskmaster.OutOfDateTask method)

(SCons.Taskmaster.Task method)

prepare_dependencies() (SCons.Node.FS.FileBuildInfo method)

(SCons.SConf.SConfBuildInfo method)

Prepend() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

PrependENVPath() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

PrependLIBS() (SCons.SConf.CheckContext method)

PrependPath() (in module SCons.Util)

PrependUnique() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

PreProcessor (class in SCons.cpp)

prerequisites (SCons.Node.Alias.Alias attribute)

(SCons.Node.FS.Base attribute)

(SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

(SCons.Node.Node attribute)

(SCons.Node.Python.Value attribute)

preserve_unknown_options (SCons.Script.SConsOptions.SConsOptionParser attribute)

presub_lines() (SCons.Action._ActionAction method)

(SCons.Action.ActionBase method)

(SCons.Action.CommandAction method)

(SCons.Action.CommandGeneratorAction method)

(SCons.Action.FunctionAction method)

(SCons.Action.LazyAction method)

(SCons.Action.ListAction method)

prev (SCons.Script.Main.Progressor attribute)

print_cmd_line() (SCons.Action._ActionAction method)

(SCons.Action.CommandAction method)

(SCons.Action.FunctionAction method)

(SCons.Action.LazyAction method)

print_help() (SCons.Script.SConsOptions.SConsOptionParser method)

print_it (SCons.Util.DisplayEngine attribute)

print_topics() (SCons.Script.Interactive.SConsInteractiveCmd method)

print_tree() (in module SCons.Util)

print_usage() (SCons.Script.SConsOptions.SConsOptionParser method)

PrintHelp() (in module SCons.Script.Main)

process() (SCons.Action.CommandAction method)

(SCons.Action.LazyAction method)

(SCons.Script.SConsOptions.SConsOption method)

process_contents() (SCons.cpp.DumbPreProcessor method)

(SCons.cpp.PreProcessor method)

(SCons.Scanner.C.SConsCPPConditionalScanner method)

(SCons.Scanner.C.SConsCPPScanner method)

process_file() (SCons.cpp.DumbPreProcessor method)

(SCons.cpp.PreProcessor method)

(SCons.Scanner.C.SConsCPPConditionalScanner method)

(SCons.Scanner.C.SConsCPPScanner method)

process_warn_strings() (in module SCons.Warnings)

processDefines() (in module SCons.Defaults)

ProgramScanner() (in module SCons.Scanner.Prog)

Progress() (in module SCons.Script.Main)

Progressor (class in SCons.Script.Main)

prompt (SCons.Script.Interactive.SConsInteractiveCmd attribute)

Proxy (class in SCons.Util)

pseudo (SCons.Node.Alias.Alias attribute)

(SCons.Node.FS.Base attribute)

(SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

(SCons.Node.Node attribute)

(SCons.Node.Python.Value attribute)

Pseudo() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Script.SConscript.SConsEnvironment method)
pspawn_wrapper() (SCons.SConf.SConfBase method)
push() (SCons.CacheDir.CacheDir method)
push_if_forced() (SCons.CacheDir.CacheDir method)
push_to_cache() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
put() (SCons.Job.ThreadPool method)
PyPackageDir() (SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Node.FS.FS method)
(SCons.Script.SConscript.SConsEnvironment method)
python_version_deprecated() (in module SCons.Script.Main)
python_version_string() (in module SCons.Script.Main)
python_version_unsupported() (in module SCons.Script.Main)
PythonVersionWarning

Q

QuestionTask (class in SCons.Script.Main)
quote_spaces() (in module SCons.Subst)

R

raise_exception() (in module SCons.Subst)
RCScan() (in module SCons.Scanner.RC)
rdir() (SCons.Node.FS.Dir method)
(SCons.Node.FS.RootDir method)
RDirs() (SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)

read() (SCons.Node.Python.Value method)
read_file() (SCons.cpp.DumbPreProcessor method)
(SCons.cpp.PreProcessor method)
(SCons.Scanner.C.SConsCPPConditionalScanner method)
(SCons.Scanner.C.SConsCPPScanner method)
(SCons.Script.SConsOptions.SConsValues method)
read_module()
(SCons.Script.SConsOptions.SConsValues method)
readlines() (SCons.Util.LogicalLines method)
readlink() (SCons.Node.FS.FS method)
(SCons.Node.FS.LocalFS method)
really_build() (SCons.Node.Alias.Alias method)
recurse_nodes() (SCons.Scanner.C.SConsCPPConditionalScannerWrapper method)
(SCons.Scanner.C.SConsCPPScannerWrapper method)
ref_count (SCons.Node.Alias.Alias attribute)
(SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)
(SCons.Node.Node attribute)
(SCons.Node.Python.Value attribute)
RegError (in module SCons.Util)
RegGetValue() (in module SCons.Util)
register() (in module SCons.exitfuncs)
RegOpenKeyEx() (in module SCons.Util)
rel_path() (SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
release_target_info() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
released_target_info (SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 remove() (SCons.Builder.ListEmitter method)
 (SCons.Executor.TSList method)
 (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.NodeList method)
 (SCons.Node.Python.Value method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.TargetList method)
 (SCons.Subst.ListSubber method)
 (SCons.Subst.Targets_or_Sources method)
 (SCons.Util.CLVar method)
 (SCons.Util.NodeList method)
 (SCons.Util.UniqueList method)
 remove_methods() (SCons.Tool.ToolInitializer method)
 remove_option()
 (SCons.Script.SConsOptions.SConsOptionGroup
 method)
 (SCons.Script.SConsOptions.SConsOptionParser
 method)
 RemoveMethod() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Environment.SubstitutionEnvironment
 method)
 (SCons.Script.SConscript.SConsEnvironment
 method)
 rename() (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 rename_module() (in module SCons.compat)
 RenameFunction() (in module SCons.Util)
 render_include_tree() (SCons.Node.Alias.Alias
 method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 render_tree() (in module SCons.Util)
 reentry() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 reentry_exists_on_disk() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 reparse_local_options()
 (SCons.Script.SConsOptions.SConsOptionParser
 method)
 Replace() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConscript.SConsEnvironment
 method)
 replace() (SCons.Subst.CmdStringHolder method)
 replace_string() (SCons.Script.Main.Progressor
 method)
 ReplaceIxes() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConscript.SConsEnvironment
 method)
 repositories (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 Repository() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Node.FS.FS method)
 (SCons.Script.SConscript.SConsEnvironment
 method)
 Requires() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConscript.SConsEnvironment
 method)
 ReservedVariableWarning
 Reset() (in module SCons.SConsign)
 reset_executor() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 resolve_include() (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)
 restore() (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)
 result (SCons.SConf.SConfBuildInfo attribute)
 Result() (SCons.SConf.CheckContext method)
 retrieve() (SCons.CacheDir.CacheDir method)
 retrieve_from_cache() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 Return() (in module SCons.Script.SConscript)
 reverse() (SCons.Builder.ListEmitter method)
 (SCons.Executor.TSList method)
 (SCons.Node.NodeList method)
 (SCons.Script.TargetList method)
 (SCons.Subst.ListSubber method)
 (SCons.Subst.Targets_or_Sources method)
 (SCons.Util.CLVar method)
 (SCons.Util.NodeList method)
 (SCons.Util.UniqueList method)
 revert_io() (in module SCons.Script.Main)
 rexists() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 rexists_base() (in module SCons.Node)
 rexists_node() (in module SCons.Node)
 rexists_none() (in module SCons.Node)
 rfile() (in module SCons.Action)
 (in module SCons.Executor)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 rfind() (SCons.Subst.CmdStringHolder method)
 Rfindalldirs() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 rightmost_separator() (in module SCons.Util)
 rindex() (SCons.Subst.CmdStringHolder method)
 rjust() (SCons.Subst.CmdStringHolder method)
 root (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 RootDir (class in SCons.Node.FS)
 RootDir.Attrs (class in SCons.Node.FS)
 rpartition() (SCons.Subst.CmdStringHolder method)
 rsplit() (SCons.Subst.CmdStringHolder method)
 rstr() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 rstrip() (SCons.Subst.CmdStringHolder method)
 ruler (SCons.Script.Interactive.SConsInteractiveCmd attribute)
 run() (SCons.Job.Jobs method)

(SCons.Job.Worker method)

RunProg() (SCons.SConf.CheckContext method)

S

save() (SCons.cpp.DumbPreProcessor method)

(SCons.cpp.PreProcessor method)

(SCons.Scanner.C.SConsCPPConditionalScanner method)

(SCons.Scanner.C.SConsCPPScanner method)

Save() (SCons.Variables.Variables method)

save_strings() (in module SCons.Node.FS)

sbuilder (SCons.Node.FS.Base attribute)

(SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

scan() (in module SCons.Scanner.Prog)

(SCons.Executor.Executor method)

(SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

(SCons.Scanner.Classic method)

(SCons.Scanner.ClassicCPP method)

(SCons.Scanner.D.D method)

(SCons.Scanner.Fortran.F90Scanner method)

(SCons.Scanner.LaTeX.LaTeX method)

scan_in_memory() (in module SCons.Scanner.Dir)

scan_on_disk() (in module SCons.Scanner.Dir)

scan_recurse() (SCons.Scanner.LaTeX.LaTeX method)

scan_sources() (SCons.Executor.Executor method)

scan_targets() (SCons.Executor.Executor method)

Scanner() (in module SCons.Scanner)

(SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

scanner_key() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)

(SCons.Node.FS.Dir method)

(SCons.Node.FS.Entry method)

(SCons.Node.FS.File method)

(SCons.Node.FS.RootDir method)

(SCons.Node.Node method)

(SCons.Node.Python.Value method)

scanner_map_delete() (SCons.Environment.Base method)

(SCons.Environment.OverrideEnvironment method)

(SCons.Script.SConscript.SConsEnvironment method)

scanner_paths (SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

SConf() (in module SCons.SConf)

SConfBase (class in SCons.SConf)

SConfBase.TestWrapper (class in SCons.SConf)

SConfBuildInfo (class in SCons.SConf)

SConfBuildTask (class in SCons.SConf)

SConfError

SConfWarning

SCons (module)

(SCons.Executor.NullEnvironment attribute)

SCons.Action (module)

SCons.Builder (module)

SCons.CacheDir (module)

SCons.compat (module)

SCons.Conftest (module)

SCons.cpp (module)

SCons.dblite (module)

SCons.Debug (module)

SCons.Defaults (module)

SCons.Environment (module)

SCons.Errors (module)

SCons.Executor (module)

SCons.exitfuncs (module)

SCons.Job (module)

SCons.Memoize (module)

SCons.Node (module)

SCons.Node.Alias (module)	SCons.Variables.PathVariable (module)
SCons.Node.FS (module)	SCons.Warnings (module)
SCons.Node.Python (module)	scons_current_file() (SCons.cpp.DumbPreProcessor method)
SCons.PathList (module)	(SCons.cpp.PreProcessor method)
SCons.Platform (module)	(SCons.Scanner.C.SConsCPPConditionalScanner method)
SCons.Platform.aix (module)	(SCons.Scanner.C.SConsCPPScanner method)
SCons.Platform.cygwin (module)	scons_subst() (in module SCons.Subst)
SCons.Platform.darwin (module)	scons_subst_list() (in module SCons.Subst)
SCons.Platform.hpux (module)	scons_subst_once() (in module SCons.Subst)
SCons.Platform.irix (module)	SConsCPPConditionalScanner (class in SCons.Scanner.C)
SCons.Platform.mingw (module)	SConsCPPConditionalScannerWrapper (class in SCons.Scanner.C)
SCons.Platform.os2 (module)	SConsCPPScanner (class in SCons.Scanner.C)
SCons.Platform.posix (module)	SConsCPPScannerWrapper (class in SCons.Scanner.C)
SCons.Platform.sunos (module)	SConscript()
SCons.Platform.virtualenv (module)	(SCons.Script.SConscript.SConsEnvironment method)
SCons.Platform.win32 (module)	SConscript_exception() (in module SCons.Script.SConscript)
SCons.Scanner (module)	SConscriptChdir()
SCons.Scanner.C (module)	(SCons.Script.SConscript.SConsEnvironment method)
SCons.Scanner.D (module)	SConscriptReturn
SCons.Scanner.Dir (module)	SConsEnvironment (class in SCons.Script.SConscript)
SCons.Scanner.Fortran (module)	SConsEnvironmentError
SCons.Scanner.IDL (module)	sconsign() (SCons.Node.Alias.Alias method)
SCons.Scanner.LaTeX (module)	(SCons.Node.FS.Dir method)
SCons.Scanner.Prog (module)	(SCons.Node.FS.RootDir method)
SCons.Scanner.RC (module)	sconsign_dir() (in module SCons.Node.FS)
SCons.Scanner.SWIG (module)	sconsign_none() (in module SCons.Node.FS)
SCons.SConf (module)	SConsignEntry (class in SCons.SConsign)
SCons.SConsign (module)	SConsignFile() (SCons.Environment.Base method)
SCons.Script (module)	(SCons.Environment.OverrideEnvironment method)
SCons.Script.Interactive (module)	(SCons.Script.SConscript.SConsEnvironment method)
SCons.Script.Main (module)	SConsIndentedHelpFormatter (class in SCons.Script.SConsignOptions)
SCons.Script.SConscript (module)	SConsInteractiveCmd (class in SCons.Script.Interactive)
SCons.Script.SConsignOptions (module)	SConsOption (class in SCons.Script.SConsignOptions)
SCons.Subst (module)	SConsOptionGroup (class in SCons.Script.SConsignOptions)
SCons.Taskmaster (module)	SConsOptionParser (class in SCons.Script.SConsignOptions)
SCons.Tool (module)	
SCons.Util (module)	
SCons.Variables (module)	
SCons.Variables.BoolVariable (module)	
SCons.Variables.EnumVariable (module)	
SCons.Variables.ListVariable (module)	
SCons.Variables.PackageVariable (module)	

SConsPrintHelpException	(SCons.Node.Python.Value method)
SConsValues (class in SCons.Script.SConsOptions)	set_build_result() (SCons.SConf.SConfBuildInfo method)
searched (SCons.Node.FS.Dir attribute)	set_conflict_handler() (SCons.Script.SConsOptions.SConsOptionGroup method)
(SCons.Node.FS.Entry attribute)	(SCons.Script.SConsOptions.SConsOptionParser method)
(SCons.Node.FS.File attribute)	
(SCons.Node.FS.RootDir attribute)	
select() (SCons.Scanner.Base method)	set_default() (SCons.Script.SConsOptions.SConsOptionParser method)
(SCons.Scanner.C.SConsCPPConditionalScannerWrapper method)	set_defaults() (SCons.Script.SConsOptions.SConsOptionParser method)
(SCons.Scanner.C.SConsCPPScannerWrapper method)	set_description() (SCons.Script.SConsOptions.SConsOptionGroup method)
(SCons.Scanner.Classic method)	(SCons.Script.SConsOptions.SConsOptionParser method)
(SCons.Scanner.ClassicCPP method)	
(SCons.Scanner.Current method)	
(SCons.Scanner.D.D method)	
(SCons.Scanner.Fortran.F90Scanner method)	
(SCons.Scanner.LaTeX.LaTeX method)	
(SCons.Scanner.Selector method)	
select_paths_in_venv() (in module SCons.Platform.virtualenv)	set_diskcheck() (in module SCons.Node.FS)
select_scanner() (SCons.Node.Alias.Alias method)	set_duplicate() (in module SCons.Node.FS)
(SCons.Node.FS.Base method)	set_entry() (SCons.SConsign.Base method)
(SCons.Node.FS.Dir method)	(SCons.SConsign.DB method)
(SCons.Node.FS.Entry method)	(SCons.SConsign.Dir method)
(SCons.Node.FS.File method)	(SCons.SConsign.DirFile method)
(SCons.Node.FS.RootDir method)	set_executor() (SCons.Node.Alias.Alias method)
(SCons.Node.Node method)	(SCons.Node.FS.Base method)
(SCons.Node.Python.Value method)	(SCons.Node.FS.Dir method)
Selector (class in SCons.Scanner)	(SCons.Node.FS.Entry method)
(class in SCons.Util)	(SCons.Node.FS.File method)
semi_deepcopy() (in module SCons.Util)	(SCons.Node.FS.RootDir method)
semi_deepcopy_dict() (in module SCons.Util)	(SCons.Node.Node method)
Serial (class in SCons.Job)	(SCons.Node.Python.Value method)
set() (SCons.Job.InterruptState method)	set_explicit() (SCons.Node.Alias.Alias method)
(SCons.Node.FS.DiskChecker method)	(SCons.Node.FS.Base method)
set_action_list() (SCons.Executor.Executor method)	(SCons.Node.FS.Dir method)
(SCons.Executor.Null method)	(SCons.Node.FS.Entry method)
set_always_build() (SCons.Node.Alias.Alias method)	(SCons.Node.FS.File method)
(SCons.Node.FS.Base method)	(SCons.Node.FS.RootDir method)
(SCons.Node.FS.Dir method)	(SCons.Node.Node method)
(SCons.Node.FS.Entry method)	(SCons.Node.Python.Value method)
(SCons.Node.FS.File method)	set_local() (SCons.Node.FS.Base method)
(SCons.Node.FS.RootDir method)	(SCons.Node.FS.Dir method)
(SCons.Node.Node method)	(SCons.Node.FS.Entry method)
	(SCons.Node.FS.File method)
	(SCons.Node.FS.RootDir method)

set_long_opt_delimiter() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)
 set_max_drift() (SCons.Node.FS.FS method)
 set_missing_sconscript_error() (in module SCons.Script)
 set_mode() (SCons.Util.DisplayEngine method)
 set_nocache() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 set_noclean() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 set_option()
 (SCons.Script.SConsOptions.SConsValues method)
 set_parser() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)
 set_precious() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 set_process_default_values()
 (SCons.Script.SConsOptions.SConsOptionParser method)
 set_pseudo() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 set_SConstruct_dir() (SCons.Node.FS.FS method)
 set_short_opt_delimiter() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)
 set_specific_source() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 set_src_builder() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 set_src_suffix() (SCons.Builder.BuilderBase method)
 set_state() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 set_suffix() (SCons.Builder.BuilderBase method)
 set_title()
 (SCons.Script.SConsOptions.SConsOptionGroup method)
 set_usage()
 (SCons.Script.SConsOptions.SConsOptionParser method)
 SetAllowableExceptions() (in module SCons.Subst)
 SetBuildType() (in module SCons.SConf)
 SetCacheMode() (in module SCons.SConf)
 setDaemon() (SCons.Job.Worker method)
 setdefault() (SCons.Builder.CallableSelector method)
 (SCons.Builder.DictCmdGenerator method)
 (SCons.Builder.DictEmitter method)
 (SCons.Builder.OverrideWarner method)
 SetDefault() (SCons.Environment.Base method)
 setdefault() (SCons.Environment.BuilderDict method)

SetDefault() (SCons.Environment.OverrideEnvironment method)	(SCons.Environment.OverrideEnvironment method)
setdefault() (SCons.Node.Alias.AliasNameSpace method)	(SCons.Script.SConsScript.SConsEnvironment method)
SetDefault() (SCons.Script.SConsScript.SConsEnvironment method)	silent_intern() (in module SCons.Util)
setdefault() (SCons.Util.Selector method)	size (SCons.Node.FS.FileNodeInfo attribute)
SetLIBS() (SCons.SConf.CheckContext method)	sort() (SCons.Builder.ListEmitter method)
setName() (SCons.Job.Worker method)	(SCons.Executor.TSList method)
SetOption() (in module SCons.Script.Main)	(SCons.Node.NodeList method)
(SCons.Script.SConsScript.SConsEnvironment method)	(SCons.Script.TargetList method)
SetProgressDisplay() (in module SCons.SConf)	(SCons.Subst.ListSubber method)
settable (SCons.Script.SConsOptions.SConsValues attribute)	(SCons.Subst.Targets_or_Sources method)
shared (SCons.Node.Alias.Alias.Attrs attribute)	(SCons.Util.CLVar method)
(SCons.Node.FS.Base.Attrs attribute)	(SCons.Util.NodeList method)
(SCons.Node.FS.Dir.Attrs attribute)	(SCons.Util.UniqueList method)
(SCons.Node.FS.Entry.Attrs attribute)	sort_key() (SCons.Scanner.Classic method)
(SCons.Node.FS.File.Attrs attribute)	(SCons.Scanner.ClassicCPP method)
(SCons.Node.FS.RootDir.Attrs attribute)	(SCons.Scanner.D.D method)
(SCons.Node.Node.Attrs attribute)	(SCons.Scanner.Fortran.F90Scanner method)
(SCons.Node.Python.Value.Attrs attribute)	(SCons.Scanner.LaTeX.LaTeX method)
SharedFlagChecker() (in module SCons.Defaults)	sources (SCons.Executor.Batch attribute)
SharedObjectEmitter() (in module SCons.Defaults)	(SCons.Node.Alias.Alias attribute)
show() (SCons.Script.Main.CleanTask method)	(SCons.Node.FS.Base attribute)
side_effect (SCons.Node.Alias.Alias attribute)	(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Base attribute)	(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.Dir attribute)	(SCons.Node.FS.File attribute)
(SCons.Node.FS.Entry attribute)	(SCons.Node.FS.RootDir attribute)
(SCons.Node.FS.File attribute)	(SCons.Node.Node attribute)
(SCons.Node.FS.RootDir attribute)	(SCons.Node.Python.Value attribute)
(SCons.Node.Node attribute)	sources_set (SCons.Node.Alias.Alias attribute)
(SCons.Node.Python.Value attribute)	(SCons.Node.FS.Base attribute)
side_effects (SCons.Node.Alias.Alias attribute)	(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Base attribute)	(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.Dir attribute)	(SCons.Node.FS.File attribute)
(SCons.Node.FS.Entry attribute)	(SCons.Node.FS.RootDir attribute)
(SCons.Node.FS.File attribute)	(SCons.Node.Node attribute)
(SCons.Node.FS.RootDir attribute)	(SCons.Node.Python.Value attribute)
(SCons.Node.Node attribute)	spawn() (in module SCons.Platform.win32)
(SCons.Node.Python.Value attribute)	spawnve() (in module SCons.Platform.win32)
SideEffect() (SCons.Environment.Base method)	SpecialAttrWrapper (class in SCons.Subst)
	spinner() (SCons.Script.Main.Progressor method)
	Split() (in module SCons.Util)

(SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConsScript.SConsEnvironment method)
 split() (SCons.Subst.CmdStringHolder method)
 splitext() (in module SCons.Util)
 (SCons.Builder.BuilderBase method)
 splitlines() (SCons.Subst.CmdStringHolder method)
 src_builder() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 src_builder_sources() (SCons.Builder.BuilderBase method)
 src_suffixes() (SCons.Builder.BuilderBase method)
 (SCons.Builder.DictCmdGenerator method)
 srcdir (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 srcdir_duplicate() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 srcdir_find_file() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 srcdir_list() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
 srcnode() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 StackSizeWarning
 standard_option_list
 (SCons.Script.SConsOptions.SConsOptionParser attribute)
 start() (SCons.Job.Parallel method)
 (SCons.Job.Serial method)
 (SCons.Job.Worker method)
 start_handling_includes()
 (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)

(SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)
 startswith() (SCons.Subst.CmdStringHolder method)
 stat() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 (SCons.Node.FS.RootDir method)
 state (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 StaticObjectEmitter() (in module SCons.Defaults)
 Stats (class in SCons.Script.Main)
 (class in SCons.Taskmaster)
 status (SCons.Errors.BuildError attribute)
 stop() (SCons.Taskmaster.Taskmaster method)
 stop_handling_includes()
 (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner method)
 (SCons.Scanner.C.SConsCPPScanner method)
 StopError
 STORE_ACTIONS
 (SCons.Script.SConsOptions.SConsOption attribute)
 store_info (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 store_info() (SCons.SConsign.Base method)
 (SCons.SConsign.DB method)

(SCons.SConsign.Dir method)
 (SCons.SConsign.DirFile method)
 store_info_file() (in module SCons.Node)
 store_info_pass() (in module SCons.Node)
 store_option_strings() (SCons.Script.SConsOptions.SConsIndentedHelpFormatter method)
 str_for_display() (SCons.Node.Alias.Alias method)
 (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Python.Value method)
 str_to_node() (SCons.Node.Alias.AliasNodeInfo method)
 (SCons.Node.FS.DirNodeInfo method)
 (SCons.Node.FS.FileNodeInfo method)
 (SCons.Node.Python.ValueNodeInfo method)
 Streamer (class in SCons.SConf)
 strerror (SCons.Errors.MSVCErrors attribute)
 (SCons.Util.PlainWindowsError attribute)
 strfunction() (SCons.Action.ActionCaller method)
 (SCons.Action.CommandAction method)
 (SCons.Action.FunctionAction method)
 (SCons.Action.LazyAction method)
 string (SCons.SConf.SConfBuildInfo attribute)
 string() (SCons.Script.Main.Progressor method)
 string_to_classes() (in module SCons.Debug)
 StringizeLibSymlinks() (in module SCons.Tool)
 StringSubber (class in SCons.Subst)
 strip() (SCons.Subst.CmdStringHolder method)
 subprocess_spawn() (in module SCons.Platform.posix)
 subst() (SCons.Action.ActionCaller method)
 (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 subst_args() (SCons.Action.ActionCaller method)
 subst_dict() (in module SCons.Subst)
 subst_kw() (SCons.Action.ActionCaller method)

(SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 subst_list() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 subst_path() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.PathList._PathList method)
 (SCons.Script.SConscript.SConsEnvironment method)
 subst_src_suffixes() (SCons.Builder.BuilderBase method)
 subst_target_source() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.Script.SConscript.SConsEnvironment method)
 substitute() (SCons.Subst.ListSubber method)
 (SCons.Subst.StringSubber method)
 SubstitutionEnvironment (class in SCons.Environment)
 suppressWarningClass() (in module SCons.Warnings)
 swapcase() (SCons.Subst.CmdStringHolder method)
 SWIGScanner() (in module SCons.Scanner.SWIG)
 symlink() (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
 sync() (SCons.dblite.dblite method)
 synonyms
 (SCons.Script.Interactive.SConsInteractiveCmd attribute)

T

Tag() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 (SCons.Node.Node method)
 (SCons.Node.Python.Value method)
 take_action()
 (SCons.Script.SConsOptions.SConsOption method)
 takes_value()
 (SCons.Script.SConsOptions.SConsOption method)
 target_from_source() (SCons.Node.FS.Base method)
 (SCons.Node.FS.Dir method)
 (SCons.Node.FS.Entry method)
 (SCons.Node.FS.File method)
 (SCons.Node.FS.RootDir method)
 target_from_source_base() (in module SCons.Node)
 target_from_source_none() (in module SCons.Node)
 Target_or_Source (class in SCons.Subst)
 target_peers (SCons.Node.Alias.Alias attribute)
 (SCons.Node.FS.Base attribute)
 (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
 (SCons.Node.Node attribute)
 (SCons.Node.Python.Value attribute)
 target_string (SCons.Script.Main.Progressor attribute)
 TargetList (class in SCons.Script)
 TargetNotBuiltWarning
 targets (SCons.Executor.Batch attribute)
 Targets_or_Sources (class in SCons.Subst)
 Task (class in SCons.Taskmaster)
 Taskmaster (class in SCons.Taskmaster)
 TaskmasterNeedsExecuteWarning
 TempFileMunge (class in SCons.Platform)
 test_load_all_site_scons_dirs() (in module
 SCons.Script.Main)
 this_word() (SCons.Subst.ListSubber method)
 ThreadPool (class in SCons.Job)
 timestamp (SCons.Node.FS.FileNodeInfo attribute)
 title() (SCons.Subst.CmdStringHolder method)
 to_bytes() (in module SCons.Util)
 to_str() (in module SCons.Util)
 to_String() (in module SCons.Util)
 to_String_for_signature() (in module SCons.Util)
 to_String_for_subst() (in module SCons.Util)
 Tool (class in SCons.Tool)
 Tool() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment
 method)
 (SCons.Script.SConsScript.SConsEnvironment
 method)
 tool_list() (in module SCons.Tool)
 ToolInitializer (class in SCons.Tool)
 ToolInitializerMethod (class in SCons.Tool)
 touch_func() (in module SCons.Defaults)
 Trace() (in module SCons.Debug)
 trace_message() (SCons.SConf.SConfBuildTask
 method)
 (SCons.Script.Main.BuildTask method)
 (SCons.Script.Main.CleanTask method)
 (SCons.Script.Main.QuestionTask method)
 (SCons.Taskmaster.AlwaysTask method)
 (SCons.Taskmaster.OutOfDateTask method)
 (SCons.Taskmaster.Task method)
 (SCons.Taskmaster.Taskmaster method)
 trace_node() (SCons.Taskmaster.Taskmaster method)
 translate() (SCons.Subst.CmdStringHolder method)
 TreePrinter (class in SCons.Script.Main)
 TryAction() (SCons.SConf.CheckContext method)
 (SCons.SConf.SConfBase method)
 TryBuild() (SCons.SConf.CheckContext method)
 (SCons.SConf.SConfBase method)
 TryCompile() (SCons.SConf.CheckContext method)
 (SCons.SConf.SConfBase method)
 TryLink() (SCons.SConf.CheckContext method)
 (SCons.SConf.SConfBase method)
 TryRun() (SCons.SConf.CheckContext method)
 (SCons.SConf.SConfBase method)
 TSList (class in SCons.Executor)
 TSOBJECT (class in SCons.Executor)
 tupleize() (SCons.cpp.DumbPreProcessor method)
 (SCons.cpp.PreProcessor method)
 (SCons.Scanner.C.SConsCPPConditionalScanner
 method)
 (SCons.Scanner.C.SConsCPPScanner method)

two_arg_commands (SCons.Scanner.LaTeX.LaTeX attribute)
TYPE_CHECKER (SCons.Script.SConsOptions.SConsOption attribute)
TYPED_ACTIONS (SCons.Script.SConsOptions.SConsOption attribute)
TYPES (SCons.Script.SConsOptions.SConsOption attribute)

U

Unbuffered (class in SCons.Util)
undoc_header (SCons.Script.Interactive.SConsInteractiveCmd attribute)
unique() (in module SCons.Util)
UniqueList (class in SCons.Util)
uniquer() (in module SCons.Util)
uniquer_hashables() (in module SCons.Util)
UnknownVariables() (SCons.Variables.Variables method)
unlink() (SCons.Node.FS.FS method)
 (SCons.Node.FS.LocalFS method)
UnlinkFunc() (in module SCons.Node.FS)
up() (SCons.Node.FS.Dir method)
 (SCons.Node.FS.RootDir method)
update() (SCons.Builder.CallableSelector method)
 (SCons.Builder.DictCmdGenerator method)
 (SCons.Builder.DictEmitter method)
 (SCons.Builder.OverrideWarner method)
 (SCons.Environment.BuilderDict method)
 (SCons.Node.Alias.AliasNameSpace method)
 (SCons.Node.Alias.AliasNodeInfo method)
 (SCons.Node.FS.DirNodeInfo method)
 (SCons.Node.FS.FileNodeInfo method)
 (SCons.Node.NodeInfoBase method)
 (SCons.Node.Python.ValueNodeInfo method)
 (SCons.Util.Selector method)
Update() (SCons.Variables.Variables method)
updrive() (in module SCons.Util)
upper() (SCons.Subst.CmdStringHolder method)
use_rawinput (SCons.Script.Interactive.SConsInteractiveCmd attribute)
UserError

V

Value (class in SCons.Node.Python)
Value() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Script.SConsScript.SConsEnvironment method)
Value.Attrs (class in SCons.Node.Python)
ValueBuildInfo (class in SCons.Node.Python)
ValueNodeInfo (class in SCons.Node.Python)
values (SCons.Script.Main.FakeOptionParser attribute)
values() (SCons.Builder.CallableSelector method)
 (SCons.Builder.DictCmdGenerator method)
 (SCons.Builder.DictEmitter method)
 (SCons.Builder.OverrideWarner method)
 (SCons.Environment.Base method)
 (SCons.Environment.BuilderDict method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Environment.SubstitutionEnvironment method)
 (SCons.Node.Alias.AliasNameSpace method)
 (SCons.Script.SConsScript.SConsEnvironment method)
 (SCons.Util.Selector method)
ValueWithMemo() (in module SCons.Node.Python)
Variable_Method_Caller (class in SCons.Defaults)
Variables (class in SCons.Variables)
Variables() (in module SCons.Script)
variant_dir_target_climb() (SCons.Node.FS.FS method)
variant_dirs (SCons.Node.FS.Dir attribute)
 (SCons.Node.FS.Entry attribute)
 (SCons.Node.FS.File attribute)
 (SCons.Node.FS.RootDir attribute)
VariantDir() (SCons.Environment.Base method)
 (SCons.Environment.OverrideEnvironment method)
 (SCons.Node.FS.FS method)
 (SCons.Script.SConsScript.SConsEnvironment method)
version_string() (in module SCons.Script.Main)
Virtualenv() (in module SCons.Platform.virtualenv)
visited() (SCons.Node.Alias.Alias method)

(SCons.Node.FS.Base method)
(SCons.Node.FS.Dir method)
(SCons.Node.FS.Entry method)
(SCons.Node.FS.File method)
(SCons.Node.FS.RootDir method)
(SCons.Node.Node method)
(SCons.Node.Python.Value method)
VisualCMissingWarning
VisualStudioMissingWarning
VisualVersionMismatch

W

waiting_parents (SCons.Node.Alias.Alias attribute)
(SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)
(SCons.Node.Node attribute)
(SCons.Node.Python.Value attribute)
waiting_s_e (SCons.Node.Alias.Alias attribute)
(SCons.Node.FS.Base attribute)
(SCons.Node.FS.Dir attribute)
(SCons.Node.FS.Entry attribute)
(SCons.Node.FS.File attribute)
(SCons.Node.FS.RootDir attribute)
(SCons.Node.Node attribute)
(SCons.Node.Python.Value attribute)
walk() (SCons.Node.FS.Dir method)
(SCons.Node.FS.RootDir method)
Walker (class in SCons.Node)
warn() (in module SCons.Warnings)
(SCons.Builder.OverrideWarner method)
Warning
warningAsException() (in module SCons.Warnings)
WarningOnByDefault
were_interrupted() (SCons.Job.Jobs method)
WhereIs() (in module SCons.Util)
(SCons.Environment.Base method)
(SCons.Environment.OverrideEnvironment method)
(SCons.Script.SConscript.SConsEnvironment method)

will_not_build() (SCons.Taskmaster.Taskmaster method)
WinError (in module SCons.Util)
with_traceback() (SCons.Errors.BuildError method)
(SCons.Errors.ExplicitExit method)
(SCons.Errors.InternalError method)
(SCons.Errors.MSVCErrors method)
(SCons.Errors.SConsEnvironmentError method)
(SCons.Errors.StopError method)
(SCons.Errors.UserError method)
(SCons.Node.FS.EntryProxyAttributeError method)
(SCons.Node.FS.FileBuildInfoFileToCsigMappingError method)
(SCons.SConf.ConfigureCacheError method)
(SCons.SConf.ConfigureDryRunError method)
(SCons.SConf.SConfError method)
(SCons.SConf.SConfWarning method)
(SCons.Script.Main.SConsPrintHelpException method)
(SCons.Script.SConscript.SConscriptReturn method)
(SCons.Util._NoError method)
(SCons.Util.PlainWindowsError method)
(SCons.Warnings.CacheVersionWarning method)
(SCons.Warnings.CacheWriteErrorWarning method)
(SCons.Warnings.CorruptSConsignWarning method)
(SCons.Warnings.DependencyWarning method)
(SCons.Warnings.DeprecatedDebugOptionsWarning method)
(SCons.Warnings.DeprecatedMissingSConscriptWarning method)
(SCons.Warnings.DeprecatedOptionsWarning method)
(SCons.Warnings.DeprecatedSourceCodeWarning method)
(SCons.Warnings.DeprecatedWarning method)
(SCons.Warnings.DevelopmentVersionWarning method)
(SCons.Warnings.DuplicateEnvironmentWarning method)
(SCons.Warnings.FortranCxxMixWarning method)
(SCons.Warnings.FutureDeprecatedWarning method)
(SCons.Warnings.FutureReservedVariableWarning method)
(SCons.Warnings.LinkWarning method)
(SCons.Warnings.MandatoryDeprecatedWarning method)
(SCons.Warnings.MisleadingKeywordsWarning method)

(SCons.Warnings.MissingSConscriptWarning method)

(SCons.Warnings.NoObjectCountWarning method)

(SCons.Warnings.NoParallelSupportWarning method)

(SCons.Warnings.PythonVersionWarning method)

(SCons.Warnings.ReservedVariableWarning method)

(SCons.Warnings.StackSizeWarning method)

(SCons.Warnings.TargetNotBuiltWarning method)

(SCons.Warnings.TaskmasterNeedsExecuteWarning method)

(SCons.Warnings.VisualCMissingWarning method)

(SCons.Warnings.VisualStudioMissingWarning method)

(SCons.Warnings.VisualStudioVersionMismatch method)

(SCons.Warnings.Warning method)

(SCons.Warnings.WarningOnByDefault method)

wkids (SCons.Node.Alias.Alias attribute)

(SCons.Node.FS.Base attribute)

(SCons.Node.FS.Dir attribute)

(SCons.Node.FS.Entry attribute)

(SCons.Node.FS.File attribute)

(SCons.Node.FS.RootDir attribute)

(SCons.Node.Node attribute)

(SCons.Node.Python.Value attribute)

Worker (class in SCons.Job)

write() (in module SCons.SConsign)

(SCons.Node.Python.Value method)

(SCons.SConf.Streamer method)

(SCons.SConsign.DB method)

(SCons.SConsign.DirFile method)

(SCons.Script.Main.Progressor method)

(SCons.Util.Unbuffered method)

writelines() (SCons.SConf.Streamer method)

Z

zfill() (SCons.Subst.CmdStringHolder method)

Python Module Index

s

SCons
SCons.Action
SCons.Builder
SCons.CacheDir
SCons.compat
SCons.Conftest
SCons.cpp
SCons.dblite
SCons.Debug
SCons.Defaults
SCons.Environment
SCons.Errors
SCons.Executor
SCons.exitfuncs
SCons.Job
SCons.Memoize
SCons.Node
SCons.Node.Alias
SCons.Node.FS
SCons.Node.Python
SCons.PathList
SCons.Platform
SCons.Platform.aix
SCons.Platform.cygwin
SCons.Platform.darwin
SCons.Platform.hpux
SCons.Platform.irix
SCons.Platform.mingw
SCons.Platform.os2
SCons.Platform.posix
SCons.Platform.sunos
SCons.Platform.virtualenv
SCons.Platform.win32
SCons.Scanner
SCons.Scanner.C
SCons.Scanner.D
SCons.Scanner.Dir
SCons.Scanner.Fortran
SCons.Scanner.IDL
SCons.Scanner.LaTeX
SCons.Scanner.Prog
SCons.Scanner.RC
SCons.Scanner.SWIG
SCons.SConf
SCons.SConsign
SCons.Script
SCons.Script.Interactive
SCons.Script.Main
SCons.Script.SConscript
SCons.Script.SConsOptions
SCons.Subst
SCons.Taskmaster
SCons.Tool
SCons.Util
SCons.Variables
SCons.Variables.BoolVariable
SCons.Variables.EnumVariable
SCons.Variables.ListVariable
SCons.Variables.PackageVariable
SCons.Variables.PathVariable
SCons.Warnings